SCIENTIFIC AMERICAN

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. XXXIII.—No. 26. [NEW SERIES.] NEW YORK, DECEMBER 25, 1875. [$3.20 per Annum. [POSTAGE PREPAID.]

GRAND CENTRAL DEPOT SIGNAL SYSTEM.

Three great railroads have their termini in the Grand Central Depot, located on 42d street, in New York city. An illustration and description of this immense structure have already appeared in these columns. With the exception of the interval between 1:10 and 3:40 in the morning, and of fifty minutes at noon, no period of fifteen minutes elapses in which some train does not depart or arrive *via* the Harlem, the Hudson River, or the New York, Hartford and New Haven road. One hundred and eighteen regular, and from ten to fifteen extra, trains daily pass, in one direction or the other over the tracks on the underground road between 53d street and Harlem bridge, a distance of nearly four and a half miles. Barely two minutes sometimes intervenes between the departure of one train and the incoming of another, and three trains often start at intervals of five minutes apart.

It is obvious that, in order to prevent confusion and accident, the movements of each and every one of these trains, while traveling between the points named, must be governed with absolute certainty. Add to this that crowd after crowd of passengers must be admitted from the reception room to the outgoing cars at exactly the proper time, and the checking of their baggage must be stopped in time to insure its despatch by the proper trains; and the reader will have formed some faint idea of the perfect system which must exist for the management of the machinery of the great depot and its approaches. To indicate the salient points of this system is the object of the present article; and in the accompanying illustrations are represented such devices pertaining thereto as are interesting, both in respect to ingenuity of design and mechanical novelty

The system as a whole may be divided into three really distinct though closely interwoven parts: first, the means whereby trains are received and despatched, and also the internal operations of the depot controlled; second, the electro-magnetic way signals; and third, the novel interlocking apparatus for switches and crossings. For the sake of clearness, we shall begin with the first, mentioning merely results, and leaving the explanation of the same to consideration in connection with the other two topics.

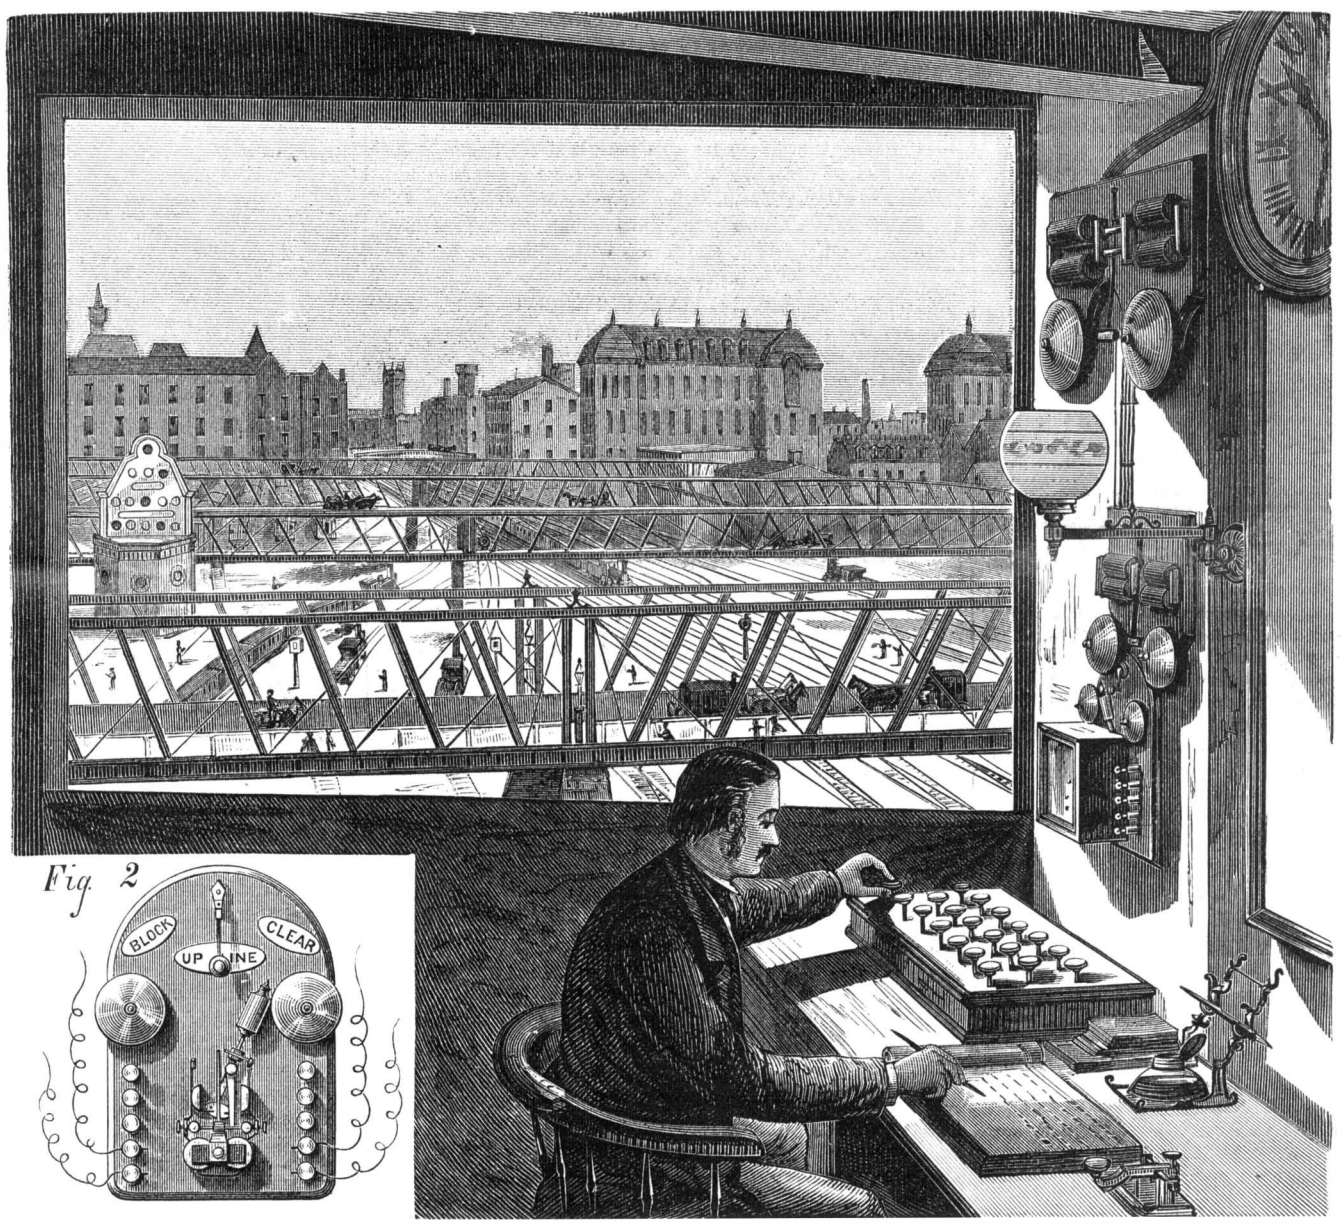

GRAND CENTRAL DEPOT.—TRAIN DESPATCHER'S OFFICE.

Fig. 2

Located far up on the north wall of the depot, the view from its broad window extending over the intricate network of rails into which the various tracks diverge, is a small cabin, the interior appearance of which the reader has before him in the largest of the engravings herewith given, Fig. 1. On the wall hang signal indicators and bells, time tables, and a huge clock. On the table before the single occupant are a telegraph instrument, a record book, and three rows of ivory buttons, twenty in all. This is the despatcher's office, and here, by pressing the buttons or manipulating the telegraph key, he controls the movement of every train going or coming, the buttons, through simple electric bells, governing everything near and about the depot, the key transmitting instructions to far-off points. By way of illustration, we suppose that one train is to start at 4:30, and that another will arrive at 4:31 o'clock. It is now just 4:10, the passengers are congregated in the waiting room, the cars are in place; and the engine, with steam up, is standing outside, not before us, or at night the flash of a green light, meaning that everything is ready for the flying switch just outside the depot, by which the engine is to clear itself from the train, the cars entering the depot by their own momentum. Now it is 4:29; down goes another button; a bell on a post beside the locomotive waiting outside rings for the engineer to back in and couple on. Hardly ten seconds elapse before a sharp "ting" calls the operator's attention to the fact that the pointer arm of the indicator on the wall has swung over from "clear" to "block." The arriving train is on the 53d street crossing. The clock says 4:30; again a button is pressed, the doors of the waiting room are slammed shut, there is a few seconds' delay for the tardy ones on the platforms to board the cars, and then the train moves slowly out of the depot. The indicator pointer still shows "block," and if the outgoing train continues its course a disastrous meeting on the crossing may result. The despatcher remains passive, however, for he knows that the signal between that train and the crossing is normally at "danger," and that the engineer will certainly come to a stop, and wait until the red disk is turned. The delay is but for a second, for the indicator bell almost instantly sounds again, the arm swings over to "clear," and the proper button is immediately touched. A distant cloud of steam can be seen for a moment, and the outgoing train is off again. Pressing another button, the operator restores the danger signal. The arriving train now rushes in, its passengers disembark, and at the sound of the bell from the despatcher, a locomotive kept for the purpose, couples on and drags the empty cars out of the depot.

We have accounted for twenty-one minutes, during which one train has left and one arrived; the reader may imagine the celerity and certainty of the work when we add that, within the fifteen minutes which we recently spent in the despatcher's cabin, three trains on three different roads were started and three received, all at different times and without the slightest confusion.

The electric bells about the depot being of simple and well known construction, and sounded by the establisbing of the current when the buttons are pressed, need no elucidation; and therefore the points remaining which require explanation are those relative to the movement of the flying switch and danger signals by the despatcher, and also as regards the indicator which announced the passage of the train over the crossing. This brings us to the second branch of our subject.

The electro-magnetic way signals and their operations are represented in Fig. 3. The signal is a disk made of metal, painted red, and inclosing a circle of red glass. This is supported on a shaft, shown upright (it may be horizontal, or in fact in any position), which, by the gearing and weight shown at A, is rotated through the unwinding of the cord wound about the barrel of the larger gear wheel. The disk may be turned to present its full face or only its edge in any direction, in one case showing its full color and signaling "danger," in the other being almost invisible and allowing the aperture of the frame or box in which it is placed to appear empty, meaning the reverse, or "clear road." It is obvious that, in order to govern the disk so that it must always appear in one of the two positions—that is, full face or on edge—mechanism is required which will allow it to be rotated by the weight exactly one quarter revolution at a time, and no more nor less. This apparatus is found in the simple electro-magnetic device shown. Just below the disk, and rigidly secured to the shaft, are four arms having downward end projections, B. Also fixed on the shaft and further down is a cam, carrying beneath it two short vertical pins. The latter, as the shaft revolves, strike certain leaf springs, which will be seen on the circular stage, C, which is located just above the frame which carries the electro-magnet, D. The armature, E, of the magnet is hinged at one side, and so placed that, when not attracted by the magnet, and consequently held outward by a suitable spring, the projections, B, strike against it as shown in the engraving, so holding the disk stationary. The construction is such, however, that when the circuit is closed by any means, through one of the springs on the circular stage, C, and the pin on the cam of the disk shaft, then the magnet will become active, the armature be drawn in, and the projection freed, when of course the action of the weight will revolve the disk. But as the latter revolves, the pin on the cam will pass clear of the spring on the stage; the current will then be broken, and the armature will fly back in time to intercept the next projection, B, preventing further movement of the disk, which

(*Continued on page* 402.)

© 1875 SCIENTIFIC AMERICAN, INC.

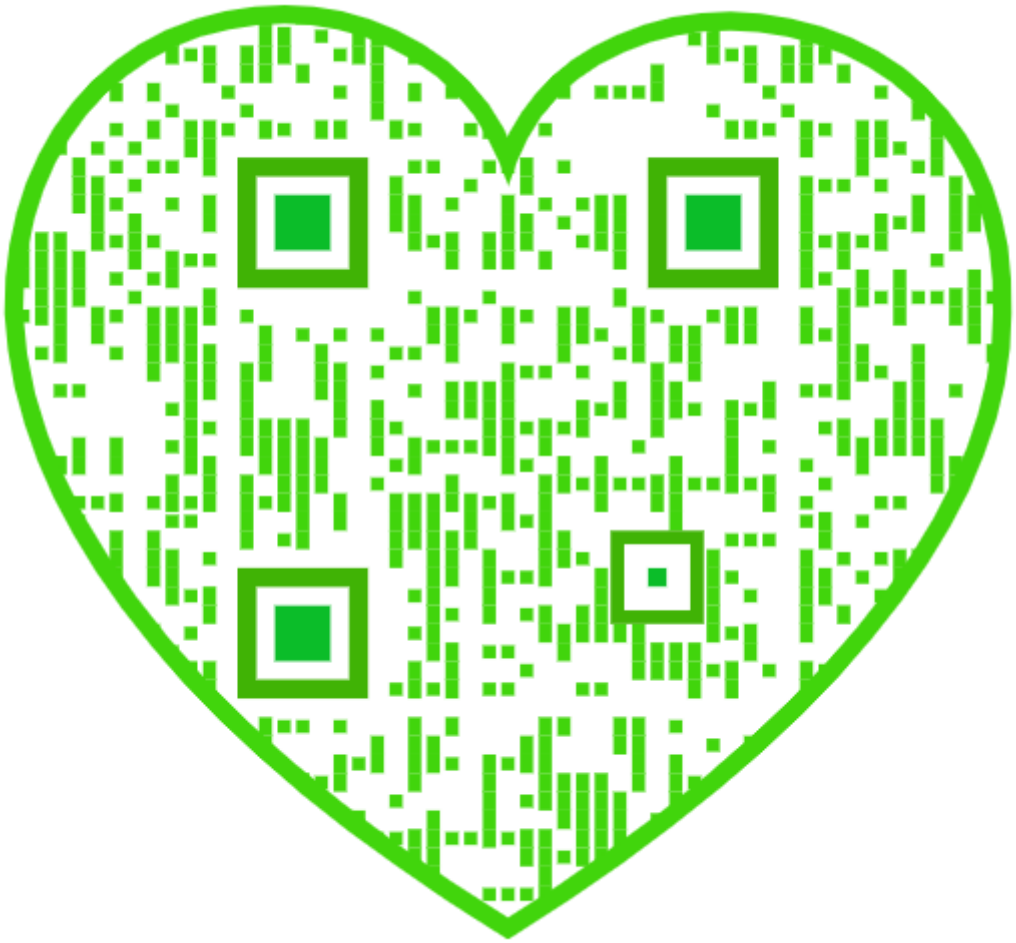

Scientific American.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

NO. 37 PARK ROW, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS.

One copy, one year, postage included.....$3 20
One copy, six months, postage included..... 1 60

Club Rates.

Ten copies, one year, each $2 70, postage included.....$27 00
Overten copies, same rate each, postage included..... 2 70

☞By the new law, postage is payable in advance by the publishers, and the subscriber then receives the paper free of charge.

NOTE.—Persons subscribing will please to give their full names, and Post Office and State address, plainly written, and also state at which time they wish their subscriptions to commence, otherwise the paper will be sent from the receipt of the order. When requested, the numbers can be supplied from January 1st, when the volume commenced. In case of changing residence, state former address, as well as give the new one. No changes can be made unless the former address is given.

VOLUME XXXIII., No. 26. [NEW SERIES] *Thirtieth Year.*

NEW YORK, SATURDAY, DECEMBER 25, 1875.

Contents.

(Illustrated articles are marked with an asterisk.)

Answers to correspondents	409	Liquid meters*	404
Beer, drinking	406	Marking out guide bars*	405
Blacking for patterns (5)	409	Metal, white (4)	409
Bleaching horsehair (4)	409	Meter, liquid mechanical*	404
Breakwater, the Manora	408	Meter, pulsating*	404
Bromide of camphor (11)	409	Meter, spirit*	404
Business and personal	409	Meter, the Siemens spirit*	404
Cementing leather to iron, etc. (2)	409	Meter, water*	404
Centrifugal force (16)	409	Mines, coal, light in	400
Corner lots	408	Newton's experiments	403
Dreams (18)	409	Patents, American and foreign	408
Drilling chilled iron (7)	409	Patents, official list of	410
Electric force, the new phase of*	401	Phosphorus light (12)	409
Electricity, another form of	400	Plant vases for decoration*	407
Engines, two new street	401	Polygon, area of a (17)	409
Filter, a charcoal*	404	Practical mechanism—No. 38*	405
Filters and liquid meters*	404	Quinine, doses of (9)	409
Filters, domestic*	404	Rosin, black (3)	409
Filters, laboratory*	404	Shaping machine, double*	403
Filters, reversible*	404	Signals, Grand Central depot*	399, 402
Fish flour	406	Silk-spinning machinery*	406
Flouring mill, the largest	405	Skilled labor	403
Galley support, printer's*	402	Stove patterns, waxing (19)	409
Gases, volume and pressure of	403	Strains on a rope (15)	409
Gears, compound (20)	409	Telegraph poles, street	407
Grand Central depot signals*	399, 402	Thermometer, mercury in a (1)	409
Greenhouses and hothouses*	407	Timely suggestions	401
Guns, recoil check for*	406	Vinegar, testing*	402
Hydraulic ram, the	402	Weight on an axle (14)	409
Index to volume XXXIII.	411, 412	Weights and pulleys (13)	409
Life, the origin of	400	Welding iron and steel (6)	409
Lighthouses, illumination for	406	Wheelwright's machine*	406
Lightning rod ignorance, loss from	400	Wood boiled in oil (10)	409

THE END.

With this issue, the time for which a large number of our subscribers have prepaid expires. We hope that all will renew their subscriptions, and bring some of their friends and neighbors with them. The safest way to remit is by Postal Order, Express, Bank Check to order of Munn & Co., or Registered Letter. But little risk is incurred in sending bank bills by mail, although the above-named methods are safest.

Beautiful Chromo Name Lists and Special Prospectuses and Circulars sent on application.

For terms, see page 410 of this paper.

THE ORIGIN OF LIFE.

Whether the line of experimental investigation adopted by Bastian and other students of spontaneous generation will ever lead to a convincing demonstration of the origin of life *de novo* is very doubtful. However fine the apparatus employed, however exacting the precautions against the slipping in of germs from without or their escape from destruction within, the ingenuity of the opponents of the theory will always be able to discover a possible broken link in the chain of evidence.

Like many another point of scientific controversy, this, we suspect, will be flanked rather than carried by direct assault. As in the case of magic and witchcraft—belief in which died a natural death in the minds of intelligent people, superseded by more rational views of man and Nature, but never logically demolished—so, we are inclined to think, the mystery of life's beginning will undergo a natural solution.

Those who hold to the dogma of "no life without antecedent life" are compelled to assume, at some point in the history of the Universe, the occurrence of nothing less than a miracle—that is to say, a phenomenon unknown to Science, and logically unsupposable from a truly scientific point of view.

Life must have begun somewhere, once at least. If it was not a natural product of material conditions, its beginning must have marked a positive breach in that causal connection of events without which Science would be impossible. The weight of all experience is against assumption of such a breach of continuity: in other words, against a miraculous origin of life. On the other hand the weight of experience is equally against the assumption of a material condition absolutely unique in character. If life arose once in consequence of material conditions, Science affords no justification for the assertion that such conditions may not be repeated, possibly in our laboratories.

This is substantially the position taken by Mr. Proctor in the latest expressions of his views, and by Professor Tyndall in his latest discussion of matter and life; and such appears to be the growing conviction of those of the present generation of scientists most pervaded by the spirit of scientific progress. Says Professor Tyndall: "The conclusion of Science which recognizes unbroken casual connection between the past and the present would undoubtedly be that the molten earth contained within it elements of life, which grouped themselves into their present forms as the planet cooled." The context shows that by "elements of life," Professor Tyndall does not mean entities but possibilities of molecular condition by which the phenomena of life were to be evolved in the natural course of events, not by the miraculous addition of a new force but by means of the forces already in play.

"The difficulty and reluctance encountered by this conception," he continues, "arise solely from the fact that the theologic conception obtained a prior footing in the human mind. Did the latter depend upon reasoning alone, it could not hold its ground for an hour against its rival. * * * Were not man's origin implicated, we should accept without a murmur the derivation of animal and vegetable life from what we call inorganic nature. The conclusion of pure intellect points this way and no other."

Admitting the natural origin of life, the question arises: When did life begin?

One branch of the evolution school delights to trace the existing forms of life back to some primodial germ: through changing conditions, the tendency of living things to vary from generation to generation, the survival of the fittest, etc., the one has become many. But there is from this point of view no satisfactory accounting for the persistence of so many primitive forms, or for the present preponderance of undeveloped forms. Nor is there any sufficient reason given for assuming that life began once, and once only, in the distant past.

A more logical position is occupied by those who favor the hypothesis that the material conditions: under which life originates are common conditions; consequently that the low forms of life which swarm in the waters of today are low because of their recentness. If they resemble long past fossil forms, they do so from some natural law of evolution, rather than in consequence of direct descent. From this point of view there may be no closer kinship between humanity and existing brutes than arises from a common relationship to Mother Earth. Man may be cousin to the ape; but that does not necessarily follow from the theory of evolution, as the Science of the future will regard it.

HEAVY LOSS FROM LIGHTNING ROD IGNORANCE.

On the 6th of September last the large woolen mill of Robert Fitton, Esq., at Cavendish, Vt., was struck by lightning and consumed, with a loss of $100,000; 130 persons were thrown out of employment. The mill was 45 feet wide, 106 feet long, 4 stories high. It had a flat, gravel-covered roof, and around the eaves ran a ¾ inch iron lightning rod with vertical points every four feet. From the eaves rod six branch rods extended to the ground, five of which terminated at a depth of three feet below the surface, and the other was carried thirty feet underground to the bank of a pond. These particulars have been mostly furnished to us by the proprietor of the mill. The Boston *Commercial Bulletin* states that the insurance underwriters regarded the mill as particularly well protected against lightning, as there was upon it an unusual array of rods, which had been overhauled and put in good order during the year. Yet the mill was struck, the flames flashing instantaneously through the spinning room. The *Bulletin* thinks that the loss of this mill shows what value there is in lightning rods. The insurance companies had to pay $84,000 in settlement.

The principal comment we have to offer is that the burning of the Cavendish mill was a glaring example of the results of lightning rod ignorance. It would be difficult to find a more sagacious or enterprising body of business men than are the presidents, directors, secretaries, inspectors, and agents of our fire insurance companies. It would naturally be supposed that, in a matter which so directly affects their pecuniary interests as fire losses from lightning, they would take great pains to acquire knowledge concerning the means of safety, and promulgate the strictest requirements among insurers. But they appear to be lacking in this respect, although year after year the records of annual losses of millions in property, by fire caused by lightning, are forced upon their attention, and large sums of money in damages are drawn from their coffers. By consulting the naval records they may easily satisfy themselves that, while formerly the losses of ships and lives by lightning were enormous, the losses immediately ceased when rods were introduced upon vessels: and at the present day we seldom or never hear of a serious injury to or loss of life from lightning, upon a properly rodded ship. The same appliance that protects a wooden vessel at sea will protect a wooden building on land, and we will here briefly describe this appliance, though in doing so we only repeat what we have oftentimes published.

In general terms, a ship's lightning rod consists of a rope or rod of copper or iron wire, lashed to the rigging and extended from the sky pole down so as to connect at any suitable place with the copper bottom, which is in contact with the sea. The rod thus has for its terminal a very large surface of conducting material, larger in fact than the deck surface of the vessel, and the lightning passes off harmlessly.

The golden rule of safety for rodded buildings is analogous to the above. *The rod must have for its terminal a very large surface of conducting material*, placed underground in contact with the earth. Without such a terminal, no rod can be considered safe.

How large should be the conducting surface of the terminal, and of what materials made? The area of conducting surface necessary to ensure safety varies with the nature of the soil. If the ground is always moist, a smaller extent of conducting surface for the bottom of the rod will be safer than if the soil is generally dry.

To meet the contingency of a very dry soil at the driest season of the year, the electrician, Mr. David Brooks, of Philadelphia, recommends that the rod have for its terminal a conducting surface, placed underground, equal in area to that of the roof of the building; if this rule errs, it is probably on the side of safety.

Applying the Brooks rule to the Cavendish mill, the rods should have had for their terminals, underground, 4,770 square feet of conducting material, in contact with the earth, instead of which they only had the beggarly amount of less than thirteen square feet. No wonder that the building was struck.

Of what material should the terminals of lightning rods be composed? Iron or copper plates or pipes are the best material. In all cases where there are underground water pipes, the rods should connect with them. If these are of any considerable extent, nothing more is required. In cases where metal terminals cannot be provided, then good charcoal may be used in quantity sufficient to furnish the required extent of conducting surface. This substance ranks next to the metals in conductivity. It may be placed in a trench leading away from the building, with the rod extended along the center. Full particulars concerning lightning rods, the electrical laws concerning them, the electrician's tests for safety, and the best methods for their construction have been given, many times over, in our back numbers; but we propose to continue the subject from time to time so long as may be necessary. We are confident that, if the insurance companies were each to spend seven dollars and place the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT on file in their respective offices during the year 1876, they would derive many most valuable suggestions from our pages, not only concerning the means of safety from lightning, but the prevention of fires of every description: suggestions which, if required to be carried into practice by insurers, would save large sums of money to the companies.

LIGHT IN COAL MINES.

Two or three years ago the SCIENTIFIC AMERICAN suggested a plan of lighting coal mines from without, so as to do away with miners' lamps, and thereby avoid the explosions of fire damp inseparable from their use. The terrible explosion which occurred on December 6 in a Yorkshire colliery, a colliery said to be worked entirely with safety lamps under very rigid discipline, gives fatal emphasis to the demand for a different mode of illuminating such works.

The experiments described in this paper (page 129, volume XXXI.) amply demonstrate the unsafety of safety lamps in places where blasting is practised, the sound wave generated by a blast driving the flame through the wire mesh of the lamp and firing the explosive air without. However perfect the lamp may be, however carefully managed, the protection it affords is only partial; and explosions are liable to occur so long as they are employed. The safety of the miners demands, therefore, the exclusion of all illuminating flames, wherever fire damp is liable to exist, and the lighting of the mines by luminous radiations incapable of exploding fire-damp.

This could be accomplished very easily, we believe, by the generation of the light without the mine (or else at the foot of a ventilating shaft), and its conveyance through tubes to the points requiring illumination. Beams of concentrated light could be sent to any distance through pipes having reflectors suitably placed at bends and angles, or without reflectors, provided the interior of the pipes were smooth and bright. The cost of such lighting would probably be less than the cost of lamps, and the degree of illumination might easily be such as to flood the mine with the brilliancy of daylight.

Another substitute for treacherous safety lamps might be found in electricity, the lanterns being closed so as to make it impossible for explosions to occur. If the insulation of the conducting wires should prove a serious obstacle, it is quite possible that Mr. Edison's "etheric force" would do the work as well without insulation.

THE DISCOVERY OF ANOTHER FORM OF ELECTRICITY.

Several years ago, it was accidentally discovered that, when the contact of an electric current which magnetized a large electro-magnet was broken very near one of the poles of the electro-magnet, the spark was so much increased in intensity as to produce a powerful snap, like that of a small pistol; while the breaking of the contact at a distance from the electro-magnet produced by no means such effect. The next thing observed was the drawing of sparks from the iron electro-magnet, or from its armature; but neither of these phenomena led any investigator to search out their origin, or to try to find what further results of the same class could be obtained.

This appears to have been done at last by Mr. Edison, of Newark, well known among electricians for several valuable inventions relating to electric telegraphy. He investigated the nature of the spark which could be obtained from the iron core of the electro-magnet, which, according to his statement, recently published, does not manifest the ordinary properties of electricity. The galvanometer is unmoved, the delicate gold leaf electrometer exhibits no signs of deflection, a Leyden jar is not charged by it, etc. But we consider the conclusion that this manifestation shows the existence of a new force, to be rather hasty.

It is well known that static electricity, which will produce a shock, will not move the galvanometer, and that the current of a large element of a voltaic battery will neither move a gold leaf electrometer, charge a Leyden jar, nor produce a shock. Therefore to say that the phenomena observed at

© 1875 SCIENTIFIC AMERICAN, INC.

test new "principles, until now buried in the depths of human ignorance," as some of the reporters of the daily papers have done, is, to say the least, rather premature.

We will here call attention to the fact that at present three principal forms of electricity are known, and they vary so much in their nature that formerly some investigators inclined to consider them as separate forces or fluids. First we have the so-called static electricity, possessing great tension; it is developed on a small scale by friction, and on a large scale by evaporation and induction, as manifested in thunder storms. For this form of electricity, not only all kinds of metals, but water and the human body are good conductors, even the dry skin of the hands forming no obstacle. Secondly, we have the voltaic or galvanic electricity, originated by chemical action, and developed in our galvanic batteries. For this form of electricity, only some metals are good conductors, others poorer, while water and the human body are bad conductors; its effects on the latter cannot be studied without wetting the skin, as the dry skin is a non-conductor of it. This form of electricity is used for telegraphy, while, as is well known, the static electricity (as obtained by friction) is not so useful for this purpose, its great tension causing it to escape too easily. Thirdly, we have the thermo-electricity, discovered in 1820, by Seebeck in Berlin, which differs as much from the galvanic electricity as the latter does from static electricity. For this thermo-electricity, water or the human body is an absolute non-conductor, and a thin metallic wire is but a poor conductor; so that it can scarcely pass through the whole length of the coil of a common galvanometer, and does not act on this instrument, but is powerfully indicated by one made with very thick and short wire, even if the galvanometer consists of one single, heavy, and uninsulated wire, in a coil of one turn or only half a turn.

Now it appears to us that the form of electricity discovered by Mr. Edison, may be:

1. A fourth kind of electricity, requiring as little or less insulation than the thermo-electricity of Seebeck. It is said to pass over the ordinary gas pipe, and can equally well be drawn from several of the chandeliers in a house, or even in other houses, if one of them is connected with the source of the new electricity.

2. It may consist of a continually reversing current of inductive electricity of a form in quality between the static and galvanic kinds. This appears the more probable as its source is said to be a vibrating armature, in which of course there are continuous interruptions, the induced currents formed by the interruptions running in an opposite direction from those formed at the making of the contacts, as is well known by all electricians. Such continually reversing currents of course cannot act on the galvanometer, gold leaf electroscope, or Leyden jar, as their rapid reversion neutralizes all possible charge, the only manifestation being the sparks, of which, however, the rapidity of the succession causes an abundance, little affected by imperfection or even absence of insulation.

At the same time, this would explain why one end of a long wire, bent over the other end connected with the electric generator, will produce a spark. Electricity is present in such abundance that branch currents are easily supplied; while at the same time the two polarities are continually and so perfectly balanced as to exactly counteract one another, so as to be unable to charge any conductor, or to manifest the results of such charge, as in an electroscope, or to establish a polar current and manifest its results, as with a galvanometer. It is undoubtedly a manifestation of electricity; and being neither positive nor negative, as is the case with all the forms of electricity thus far known, it might be called neutral electricity.

The sparks investigated by Dr. Reiss, the well known German electrician, and called by him weak sparks, have polarity, being either positive or negative; and although they have certain resemblances to the electricity obtained by the method of Mr. Edison, they appear to be of a different nature, having a very different origin.

The most remarkable feature of this new form of electricity, which proves its perfect neutrality, is that it has no apparent effect on the human body, and none on even that most delicate of all electric tests, the properly prepared frog's leg, unless an exceedingly strong galvanic current is used around the magnet.

Two New Street Engines.

A new traction engine for street usage has recently been tested in Brussels, Belgium, with satisfactory results. Exteriorly it resembles an ordinary street car, with the exception of the chimney which projects through the roof. The body is placed quite low, and the wheels, which run on rails, are concealed to within a short distance from the ground. The boiler is tubular and inexplosible, and is heated by coke. The engine is one of the Brotherhood three-cylinder pattern. The exhaust is condensed in a tubular condenser, and the boiler is fed by a separate steam pump. The machine traveled without smoke or escape of steam, made no more noise than an ordinary horse omnibus, and turned sharp curves very easily. Another engine has been introduced in Paris; but instead of running on a tramway like the above, it is a kind of omnibus or steam carriage. It accommodates 12 passengers and weighs about 5 tuns. A vertical engine supplies the motive power and occupies a space in the rear of but 39 inches high by 31 inches broad. A Giffard injector forces in the feed water, which is taken from the gutters or any other convenient source. The machine will travel at the rate of 9 miles per hour. About 3 horse power is utilized, requiring 600 quarts of water, and 110 lbs. of coal per hour.

THE NEW PHASE OF ELECTRIC FORCE.

In our number for last week, we called attention to what we at first supposed to be a similarity between the prior experiments of Professor Reiss and those of Mr. Edison. A further examination of the Reiss reports satisfies us that the results obtained by Mr. Edison are novel, and have little or nothing in common with those of Professor Reiss.

We have had an opportunity of closely examining the apparatus by which Mr. Edison and his assistants obtained the evidences of the supposed new kind of electricity which has lately elicited so much inquiry and speculation, and we present herewith three diagrams of some of the apparatus used by Mr. Edison during his experiments.

The first recognition of the distinctive character of the spark occurred on the evening of November 22. Mr. Edison and his assistants, as we have already stated, were experimenting with a vibrator magnet, consisting of a bar of Stubb's steel, fastened at one end and made to vibrate by means of a magnet, when they noticed a spark coming from the core of the magnet. They had often noticed the same phenomenon in connection with telegraphic relays, in stock printers when there were iron filings between the armature and the core, and in the new electric pen, and had always supposed it to be due to inductive electricity. On this occasion the spark was so bright that they suspected something more than induction. On testing the apparatus they found that, by touching any portion of the vibrator or magnet with a piece of metal, they got the spark. They then connected a wire to the end of the vibrating rod (the wire leading nowhere), and got a spark by touching the wire with a piece of iron. Still more remarkable, a spark was got on turning the wire back upon itself and touching any part of the wire with its free end. The end of the vibrating rod was then connected by means of the wire to a gas pipe overhead, whereupon a spark could be drawn from any part of the gas pipes in the room, and subsequently it was found that the spark could be drawn from any part of the whole system of city gas pipes. The vibrator and battery were next placed



on insulated stands, and the wire, connected with x, Fig. 1, was carried over to the stove, about 20 feet distant. On rubbing the end of the wire against the stove, splendid sparks were observed. With the wire permanently connected with the stove, sparks could be drawn from any part of the stove with a piece of metal held in the hand. Again, while the vibrator was in action, a block of iron was placed near x, but not touching the bar, nor connected with it in any way except by the wood of the base through the table, and sparks could be drawn from the iron.

These and other experiments which we have had the pleasure of witnessing show conclusively that the new force is not amenable to the laws of voltaic or static electricity.

An experiment made with the apparatus figured in the large engraving (Fig. 2) will satisfy any electrician that the force in action is not induced electricity. All the parts are insulated except the gas fixture. A is the battery; B, a common telegraphic key; C, an electro-magnet; D, a bar of cadmium (or other metal, cadmium being the best) supported by an

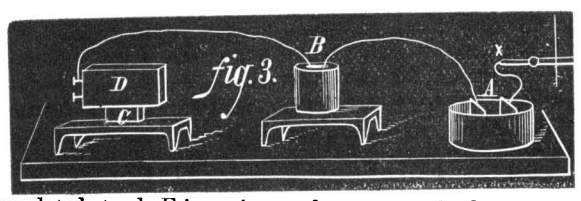

insulated stand; E is a mirror galvanometer; F, the gas pipe; G, a dark box enclosing pencils with graphite points (common lead pencils). The unknown current passes from the bar of cadmium through the galvanometer, without causing the slightest deflection, and—notwithstanding the gas pipe connection, which would drain the wire of induced electricity, if there were any—bright sparks are visible between the graphite points in response to the motion of the telegraphic key.

Standing on an insulated stool, the experimenters draw sparks from the following arrangement (Fig. 3), in which x is the end of the vibrator (which, as well as the battery, is insulated); A, a secondary battery; B, a 200 ohm coil of copper wire; C is a block of iron, and D, a condenser, all well insulated except A, which is of glass, and stands on the table.

In another experiment a glass rod, four feet long, with a piece of carbon fixed to one end, was well rubbed with a silk handkerchief over a hot stove, and the carbon point presented to the apparatus, the other end of the rod being held in the hand with the handkerchief: sparks were drawn, yet the galvanometer chemical paper, the sense of shock in the tongue, and a delicate gold leaf electroscope were not in the least affected by the mysterious current.

Tested in whatever way the experimenters have been able to devise, the new current refuses to obey any of the established laws of electricity further than that it traverses metallic conductors, manifests itself as light, and can be controlled by making and breaking connection. Among its observed peculiarities may be noticed its lack of polarity, indifference to the earth (and consequently its capability of transmission through uninsulated wires), its power of producing action when turned back upon itself, its independence of electric non-conductors, and seeming lack of mechanical and physiological effect.

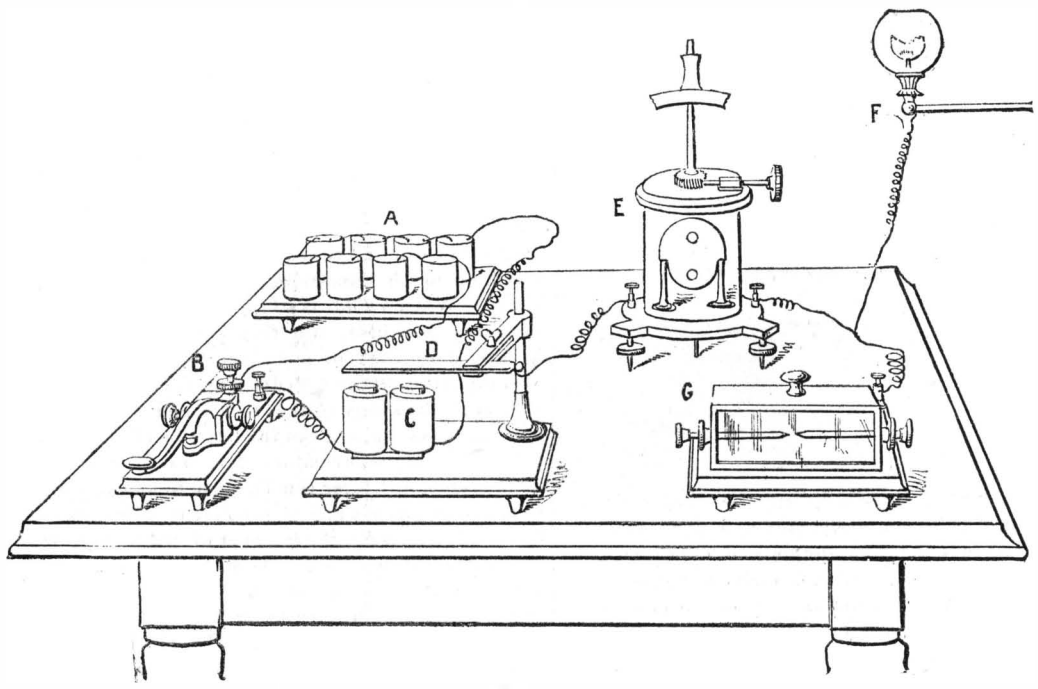

MR. EDISON'S APPARATUS, EXHIBITING THE NEW PHASE OF ELECTRIC FORCE.—Fig. 2.

Mr. Edison has proposed the name "etheric force."

Since the above was put in type, Mr. Edison has sent us a variety of additional particulars pertaining to his new and interesting discovery, which we shall give to our readers in our next number.

TIMELY SUGGESTIONS.

Every Employer should present his workmen and apprentices with a subscription to the SCIENTIFIC AMERICAN for the coming year.

Every Mechanic and Artisan whose employer does not take the SCIENTIFIC AMERICAN should solicit him to subscribe for 1876.

Now is the time for old subscribers, whose subscriptions expire with the year, to renew.

Now is the time for new subscribers to send $3.20 and commence with the new year.

Now is the time for forming clubs for the new year.

It will pay any one to invest $3.20 for himself, his sons, or his workmen, for one year's subscription to the SCIENTIFIC AMERICAN.

It is easy for any one to get ten subscribers at $2.70 each, and for his trouble obtain the splendid large steel plate engraving, "Men of Progress," worth $10.

It is easy for any old subscriber to get a new one to join in taking the paper.

It is no more trouble to remit $6.40 for two subscribers than $3.20 for one. The sender gets a copy of SCIENCE RECORD, or of WRINKLES AND RECIPES, as he may prefer, for his trouble.

If any mechanic whom you ask to subscribe says he can not afford it, tell him he cannot afford not to.

If any one wishes specimens of the paper to examine before subscribing, tell him to write to the publishers, and enclose 10 cents, and it will be sent to him by return mail.

If handsome name lists and prospectuses are wanted to assist in obtaining subscribers, send to the publishers of this paper.

Binding.—Subscribers wishing their volumes of the SCIENTIFIC AMERICAN bound can have them neatly done at this office. Price $1.50.

© 1875 SCIENTIFIC AMERICAN, INC.

(*Continued from first page.*)

will thus have completed exactly one quarter revolution, changing for a given location from an edge view to full face, or *vice versâ*. The reader has doubtless ere this divined that the despatcher, in raising a danger signal to release the outgoing train, or in setting the flying switch signal, simply pressed a button which established an electric current, and thus charged the disks as was necessary. From the foregoing also it will be obvious how this signal is worked on the block plan from two different points. As soon, for example, as a train passes a given location, an operator there

Fig. 3

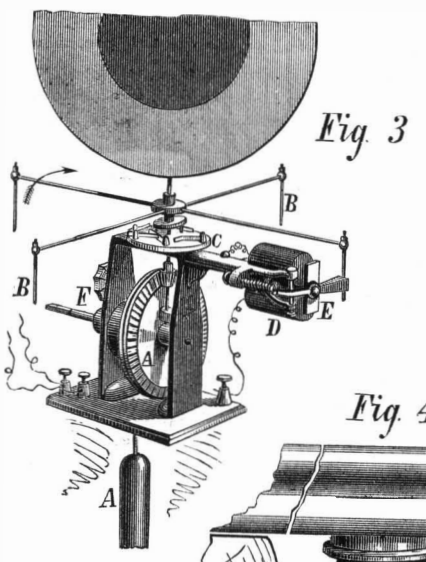

Fig. 4



posted, by the means described, sets the danger signal. When the train reaches another point a safe distance away, it may itself, by pressing on a simple and delicate circuit closer, arranged, as shown in Fig. 4, under the rails, again establish the current, which will free the disk arm a second time and turn the disk to safety for following trains. Or, as it is easy to see, by the use of two circuit closers properly disposed, the train might set its own danger signal and then reverse it when a suitable distance has been traversed.

But it is not enough that the signals should be set. The people in charge of them must also be infallibly informed of that fact, as well as of any failure in the working. For this purpose the tell-tale shown in Fig. 2 is used. This is the machine which announced that the incoming train, in one example, was coming over the 53d street crossing; or more properly, it first showed that a block signal had there been set and afterwards reversed; for through that signal it was operated, as we now proceed to show.

By examining the circular stage, C, in Fig. 3, a pair of springs at the left hand side, placed so as to overlap, will be noticed. There are two pairs of these springs, arranged diametrically opposite to each other on the circle, and hence between the two similarly disposed single springs, through which the circuit, as before explained, is established. The members of each pair of springs overlap without touching, but are brought in contact by one of the pins on the cam on

Fig. 5.

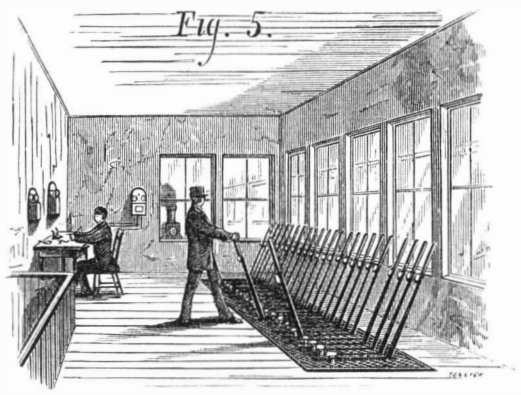

the disk shaft, during the revolution of the latter. Without entering into further detail, we may state that this contact must necessarily be caused with one or the other pair of springs whenever the disk changes position, and the effect of such contact is to send a current to the electro-magnet in the indicator, Fig. 2. The armature of this magnet is connected with the index clapper, and the general construction is such that, whenever the magnet is excited, the clapper will be thrown over to a position opposite to that in which it happens to be. The relation between indicator and signal is so adjusted that whenever the signal shows "danger," the clapper, which has a weighted extremity to aid its motion and to strike a gong at each end of its course, and so to give warning, swings over to "block;" when the signal is reversed the arm swings back to "clear." During its travel it strikes a suspended ball, and this, vibrating, shows to ano perator, who may have several indicators before him, which one has just become reversed. By this arrangement, it will be evident that when the signal moves the indicator must show it, and *vice versâ*; so that the operator always has accurate knowledge of the state of the sections of line under his charge, no matter how far distant from him, or how widely separated the same may be. There are many ingenious points about the system, which lack of space forbids our describing. We may mention, however, the device partially shown at F, in Fig. 3, which consists of the winding stem for the signal weight, and also other mechanism, which compels the turning of the stem and the consequent winding of the cord, before the door of the case in which the signal is contained can be unlocked to admit of the insertion of the lamp at night. Another ingenious device is that used for drawbridges, which consists of a lock on the crank, which withdraws the locking pin of the bridge. It is impossible to do this until a button is pressed, which sets a danger signal for approaching trains, nor can that signal be reversed or tampered with until the bridge is again securely locked in place.

One of the most important localities where that system is necessary is at the crossing of several tracks, similar to that at 53d street; and here also is used the new switch apparatus, which forms the third and last portion of our subject. Fig. 5 shows the interior of the switch house with the working levers. Each lever is connected to a weighted arm, A, Fig. 6, and also, by suitable interposing connections, through the rod, B, to the locks, the signals, or switches. Attached to the shank of the lever, at C, are jointed rods, which are secured to a series of square shafts, D, Fig. 7. Just above the shafts are the locking plates, E. These are flat iron plates hung in journals at each end. In the edge of each are notches, which hold the levers and prevent them from moving from the ends of the slots in which they work when the latches lay flat, as shown. If, however, a latch be tipped by pressing on a foot piece in front of the lever, the rod of which bears against the point, F, Fig. 7, the lever will be freed from the notch. The interlocking arrangement is found in cams on the square shafts, D. These are so disposed as to be immediately under the edge of the latch plates. When a shaft is so turned that the cam presses on the plate from below up, then, obviously, the plate cannot be tipped by the foot piece, nor the lever disengaged; so that the latter is thus securely locked. It is impossible to set a signal at safety if the switch points are not properly placed and locked, nor can the latter be altered after the signal is set. Any combination of interlocking is possible: in other words, any lever can be made to lock any other lever, so that it becomes a simple problem to adjust the apparatus in conformity with the number of track requirements at any particular situation. The lock for the rails consists of a hollow cast iron sleeper placed under the ends of the switch rails, and having other two crescent-shaped pivoted latches connected by a rod. By moving the latter, the points of the latches are lowered beyond the bottom of the

Fig. 6



Fig. 7



rails, so that the same can be moved sideways, or raised so as to prevent any similar motion. The construction is such that, unless the rails are properly placed, it is impossible to raise the latch, which thus offers an additional means of safety. Taken as a whole, the ingenuity, simplicity, and utility of this perfect system of communication, and the contrivances invented to accomplish it, are truly wonderful. The mechanical appliances are the joint inventions of Mr. J. M. Toucey, the General Superintendent, and Mr. William Buchanan, Superintendent of Machinery, of the Hudson River Railroad.

The electro-magnetic signals are the invention of Mr. Daniel Rousseau of this city, and are the subjects of several very recent patents. The depot arrangements are the results of the combined skill of Superintendent Toucey and Depot Master Franklin. To all the above named gentlemen we are indebted for much courtesy in facilitating our obtaining the interesting facts here presented.

ACIDEMETRY APPLIED TO THE TESTING OF VINEGAR.

In order to determine the value of a vinegar, it is necessary to discover in what proportion acetic acid is present and to assure oneself that no foreign mineral acids are contained. The chemist executes these various operations with acidimetric liquors, reagents, and apparatus; but there has been for some time needed a simple and practical process available to those who may not have at their command the resources of a laboratory. MM. Reveil and Salleron have recently devised an acidimeter, the use of which is illustrated in the annexed engravings (taken from *La Nature*), and which can be readily understood and the directions for its manufacture and employment followed.

The necessary apparatus consists, first, in a tube of glass closed at one end as shown in Fig. 1; near said extremity, at the zero mark, the word "vinegar" is inscribed to indicate the amount of vinegar to be employed. Above the zero, the tube is divided off, and the divisions are marked 1, 2, 3, etc., so as to show the richness in acid, as will be described below. Second, there is a small sponge attached to a whalebone to be used to clean the tube after each experiment. Third, a pipette (Fig. 2), is marked to show a quantity of 0·25 cubic inch of liquid, so that the amount of vinegar for each test can be accurately measured. Lastly a flask of liquor, used as a standard acidimetric reagent, is added.

One fourth of an inch of vinegar is taken into the pipette and retained therein by the finger, as shown in Fig. 2. This is allowed to flow into the graduated tube and the acidimetric liquid, colored blue, is slowly poured in. The fluid soon becomes red when the tube is agitated by being turned over, the thumb stopping the opening. More of the test liquid is added, the mixture a second time shaken, and so on until the fluid in the tube becomes of the color of the red outer skin of an onion. The graduation on the tube, corresponding to the level of the liquid, is then read off, and this shows the centesimal proportion of acetic acid contained in the vinegar.

The reaction can easily be followed. The acidimetric liquor, prepared in advance, is a solution of borax and caustic soda. The proportion of these ingredients is calculated to correspond to a certain quantity of crystalizable acetic acid. The liquor is colored blue by litmus, and indicates by its change to violet red the moment when the saturation of the acid by the base is effected.

Vinegars are sometimes adulterated with sulphuric and other mineral acids, which may be detected as follows: The vinegar to be tested is boiled with a few fragments of starch.

Fig. 2. Fig. 1.

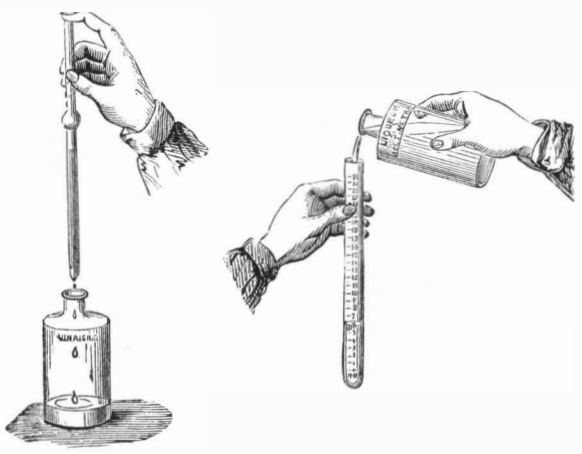

It is then cooled, diluted, and a few drops of iodine tincture dropped in. With pure vinegar, the blue color of iodide of starch should show itself; if no coloration ensues, a foreign mineral acid is present. Wine vinegars are frequently falsified with wood vinegars (pyroligneous acid): this last product almost invariably contains small quantities of sulphate of soda, the presence of which may be detected by the addition of chloride of barium, which yields a white precipitate, sulphate of baryta.

KING'S IMPROVED SUPPORT FOR PRINTERS' GALLEYS.

The annexed engraving represents a simple little device designed to support a printer's galley when the same rests upon the case, during the process of making corrections in the type or during the transfer thereinto of type from the stick. Ordinarily the galley is rested against the ledge of the case or else placed diagonally across the latter, thus covering several letter boxes and necessitating its being moved whenever the types contained in such receptacles are required. The present device sustains the galley in such a position that none of the boxes are wholly closed, so that access into any one of them may easily be had.

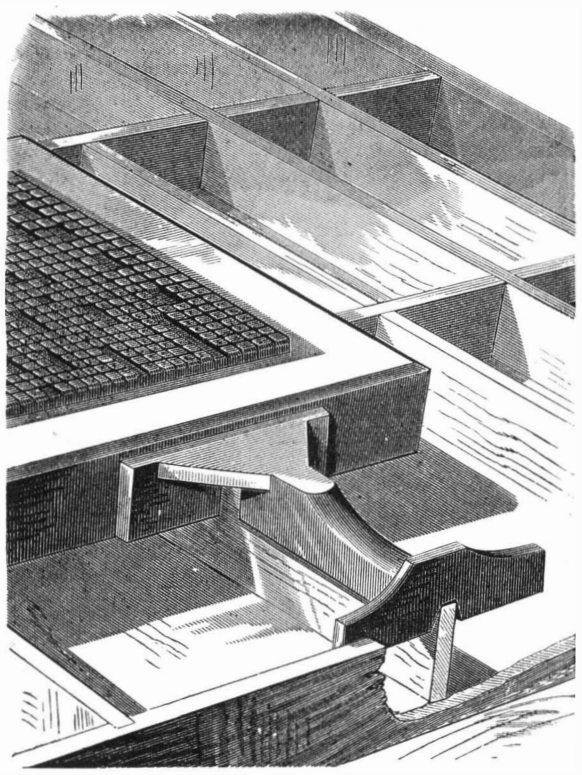

As shown in the engraving, it consists simply of a meta casting, forming a straight grooved piece between two parallel pieces, disposed at the ends and at right angles thereto. The groove in the central portion and notches in the cross pieces fit over the transverse partitions of the case, and the galley rests against one crosspiece while the other presses against the longitudinal partition or edge. The invention is a handy convenience for compositors.

Patent now pending through the Scientific American Patent Agency. For further particulars address Messrs. Johnson & King, 100 11th street, Brooklyn (E. D.), N. Y.

THE hydraulic ram is especially useful where there is a small stream of water and only a slight fall. A fall of two feet, and a flow of 1½ cubic feet of water—92¾ lbs.—per minute, will deliver 0·010 of a cubic foot of water per minute at a hight of 38 feet.

© 1875 SCIENTIFIC AMERICAN, INC.

NEW DOUBLE SHAPING MACHINE.

Messrs. R. Fernau & Co., of Vienna, Austria, have recently put in market a double-acting shaping machine, of which the specialty consists in the arrangement of the feed motion, which will be understood by reference to the perspective sketch and the detail. The boss of the driving pinion is extended, and has a curved slot formed in it, which imparts an oscillating motion to a lever; this motion is transferred to a horizontal shaft, through which it is conveyed to the tool holder. On the front end of this shaft is a cast iron cap, which serves as a lever and also as a cover. In a slot in the cover (see Fig. 2) is placed a bolt, which can be moved up or down at will, the end of the bolt projecting, as shown in Figs. 1 and 2, into a triangular opening in the piece within the cap, so that the oscillating move ment of the cap gives greater or less motion to the piece above mentioned, which carries at the upper end a pawl and ratchet driving a toothed wheel, that in its turn conveys motion to a worm and wheel. The spindle of the latter carries a horizontal pinion gearing into a rack, and gives motion to the wheel.

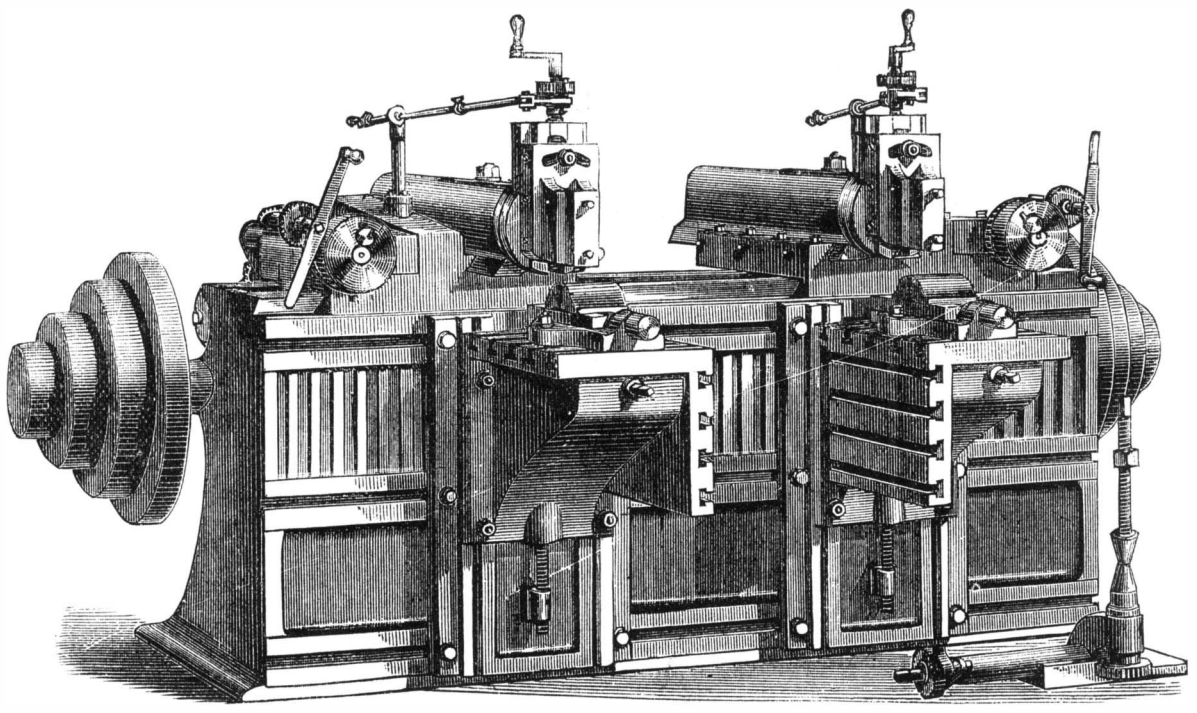

DOUBLE SHAPING MACHINE.

Skilled Labor.

The richest mines of wealth of a nation are its workshops, its factories, and its farms, filled with men of highly trained and skilled labor, it being a universal law that the world's great prizes go to the best. This is not simply an abstract question, but one affecting us all in our prosperity and success every day and every hour of the day, and every day in the year. France, Switzerland, Prussia, and Germany have laid us, and are laying us, every year under contributions of millions of dollars for very superior workmanship, taste, and skill. Their silks, their laces, their cloths, their china and porcelain, their bronzes, their fabrics in metal and wood, and their objects of *vertu* and art could be largely produced in this country if we had developed and educated our artisans and mechanics up to the same perfection in workmanship that they have in those countries.

Their mode of thorough instruction in their workshops and manufacturing establishments produces men of the highest order of training, ability, and skill. If we take, as an example, the small State of Wurtemburg, in Germany, with a population of 1,778,000, we find that they have forty-nine industrial and technical schools for the training of boys and educating them in all the industrial arts. In these schools there is a mercantile and commercial course, and one for the application of chemistry to the chemical arts and manufactures, where there are fifty-one professors and teachers of chemical and physical mineralogy, modeling rooms, mechanical workshops, rooms for drawing, botanical garden, and astronomical observatory. There are other schools for building instruction and tradesmen, where builders are trained for masters and constructors of public works, etc., and plasterers, carpenters, grainers, painters, smiths, etc., are educated for fore men and masters; and the schools are crowded with those for whom they were intended, while the graduates are eagerly sought everywhere on the Continent for their superior excellence.

There are also schools for education in all agricultural pursuits, in which practice is combined with theory, they having under their care four hundred square miles of territory. These schools are largely attended, for in one year 12,040 persons, in 523 places, were getting a thorough, complete, and practical agricultural education. Connected with these schools are institutions for practical training in anatomy, physiology, and diseases of animals; and a smithy is attached, in which 4,000 animals were shod per year.

The result of this discipline is shown in the superior skill of the workmen, the excellence of all their works in the arts and sciences, and the harmony existing among them. A thorough acquaintance with a particular industry necessitates a wide range through the field of knowledge, and makes a familiarity with all the causes which produces such effects. The brain is the motive power as well as the guide, for it points the way, and all things move as it points. Skilled labor is its own protection. While its progress may be temporarily impeded by the glittering tinsel of some superficial work, yet its final success is conclusive proof that "all is not gold that glitters," for merit in all things must win.

Carelessness and ignorance are the most fruitful sources of loss of life and property. Proportionately, as the mind becomes trained and disciplined, carelessness ceases; greater care is manifested in the management of all the affairs of life and the products of our workshops. The great hurry, which has characterized our people, to reach results and to accumulate riches causes that neglect and superficial workmanship which is so prevalent. Scarcely a paper is published that does not contain in its columns some startling accident, accompanied by great loss of life, occasioned by defective machinery or ignorance in its management. Railroad collisions nearly all result from these causes. The disastrous errors which frequently occur in many cities among chemists and druggists arise from an ignorance which never would or could exist if a compulsory and skillful training in schools established for the purpose, under practical as well as theoretical masters of the particular industry sought to be acquired, had been gone through. We often read of the falling of a floor filled with people. This shows an ignorance of building and of the strength of different materials, a knowledge of which is so indispensable in this important branch of industry. Schools established for a thorough training in mining would not only save life and property, but cause a more profitable development of our mineral resources.

"Knowledge is power." It is the limiting director of the productiveness of all labor. As a knowledge of all the arts, a thorough acquaintance with the laws of nature exists, so will be the progress in improvement in all the affairs of life. Its application to all the industries causes a greater productiveness from the same labor. It has decreased the labor of farming, and increased its producing power. The superseding of the scythe and the cradle by the mowing and reaping machines has enabled a much greater number of acres to be tilled; at the same time a larger value is realized from the same quantity of land

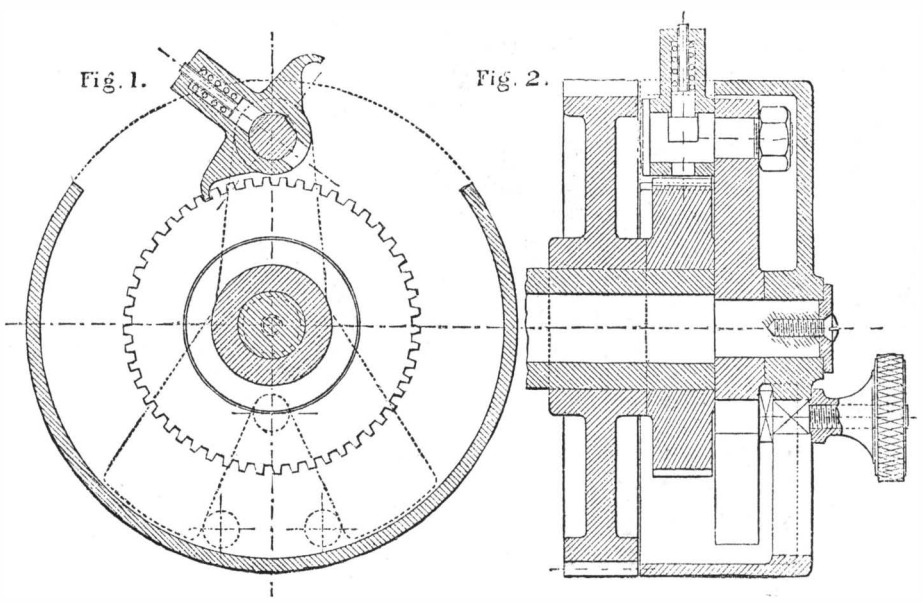

DOUBLE SHAPING MACHINE—SECTIONAL VIEW.

The greater the skill, the greater the wages. Every hour spent in improving the mind is a bid for increased pay. "The laborer is worthy of his hire," and that worth is enhanced just in proportion as a knowledge of his work is great or small. The foreman of a workshop receives greater compensation than any other workman. Why? Because he possesses greater intelligence on all matters connected with the work. This subject is capable of being drawn to a great length; but enough has been said to show the benefits arising from knowledge and skill in all branches of industry, and that industrial and technical schools should be established everywhere.—*Philadelphia Inquirer.*

THE volume of a confined mass of gas is inversely proportional to the pressure to which it is exposed; the smaller the pressure the larger the volume, and the greater the pressure the less the volume.

Sir Isaac Newton's Experiments.

When Sir Isaac Newton changed his residence, and went to live in Leicester Place, his next door neighbor was a widow lady, who was much puzzled by the little she had observed of the philosopher. One of the Fellows of the Royal Society of London called upon her one day, when, among other domestic news, she mentioned that some one had come to reside in the adjoining house, who, she felt certain, was a poor crazy gentleman, "because," she continued, "he diverts himself in the oddest ways imaginable. Every morning, when the sun shines so brightly that we are obliged to draw the window blinds, he takes his seat in front of a tub of soapsuds, and occupies himself for hours blowing soap bubbles through a common clay pipe, and intently watches them till they burst. He is doubtless now at his favorite amusement," she added; "do come and look at him." The gentleman smiled, and then went up stairs, when, after looking through the window into the adjoining yard, he turned round and said: "My dear madam, the person whom you suppose to be a poor lunatic is no other than the great Sir Isaac Newton, studying the refraction of light upon thin plates, a phenomenon which is beautifully exhibited upon the surface of a common soap bubble."

This anecdote serves as an excellent moral not to ridicule what we do not understand, but gently and industriously to gather wisdom from every circumstance around us.—*Druggist's Circular.*

Corner Lots.

To persons about to build a residence in the city, the following article from the *Land Owner*, on the most desirable corner to locate on, will be read with interest:

When a lot is on the northwest corner of two streets, it is best, in a sanitary point of view, for its frontage to be on the west side of the street and the depth on the north side. The house thus gets the sun in the front bed rooms in the morning, and on the side of the house, looking south, nearly all day. When a lot is on the northeast corner, it is best that its frontage should be on the east side and its depth on the north side of the street. The east side of the street looks west, from which quarter our prevailing cold summer winds come. All rooms looking west are very cold at night, especially at the time of year when sudden changes of temperature are common. If the front bed room windows face the east side of the street, they can be kept closed at night and air secured from the sheltered side windows on the north side of the street, on which the sun shines nearly all day. If a lot is on the southwest corner, it is better that the frontage be on the south side, and its depth on the west side of the street. The rays of the sun do not strike the south side of the street, while they do strike the west side in the early half of the day—thus getting the sunshine and heat in the front bed rooms at the most desirable hours. When a lot is on the southeast corner, it is best that it should have its frontage on the south side and its depth on the east side, for the reason, before stated, that the sun does not strike the south side of the street, while its rays are poured on the east side from about noon till 5 p.m. The cold winds of night can be kept from the best (the front) bedroom by having the windows closed on the east side and by opening them on the south side. These are important facts to be remembered by those who are sub-dividing large lots for sale, or by those who are erecting houses on large corner lots, where they are in a position to front them either way.

No one looking for a residence site, who can afford to buy a corner lot, should fail to do so. By having a corner all difficulty about securing abundant sunshine and air in each room is avoided. Of almost equal value with sun and air is the cheerfulness of rooms in a corner house. The effect upon women, who have little exercise or change, is exceedingly beneficial. There is, from a corner house, an outlook that whiles away many an hour which would otherwise be dull to the dweller in the house. The average cost of a corner lot over a middle one in a residence location is 40 per cent, and it is worth more than this difference. A corner house will rent for nearly enough more than a middle one to justify the purchase of the former from an investment point of view alone. Those who wish a sunny, well aired, and really cheerful dwelling should strain every point to secure a corner. Better a corner and poorer house than a fine house hemmed in between other dwellings.

© 1875 SCIENTIFIC AMERICAN, INC.

FILTERS AND LIQUID METERS.

In many localities, where the water supply is drawn from rivers adjacent to cities or from sources liable to be contaminated by decaying organic substances, filtration of the fluid, before using it for drinking or cooking, is an important sanitary precaution. To this end various devices have been invented, all so constructed that the water passes through certain substances which, while arresting the passage of matter mechanically suspended, are sometimes of such a nature as to absorb deleterious gases and effete substances. In the annexed engravings, from Knight's "Mechanical Dictionary"*, will be found representations of several different inventions in the filter line.

LABORATORY FILTERS,

used by chemists, are of the simplest construction, and are represented at *a* and *b*, in Fig. 1. The first is made of a circle of bibulous paper, folded and opened into a quadrant and inserted into a funnel of glass or paper. For filtering matters which become viscid on cooling, such as gelatin, tallow,

Fig. 1.

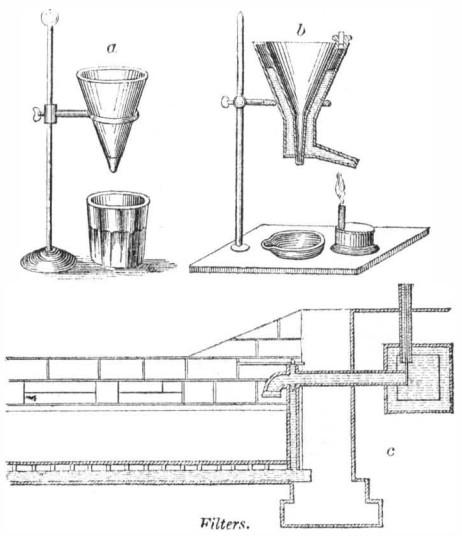

Filters.

wax, etc., the apparatus shown at *b* is used, in which the filter is placed within a water bath which has a leg heated by an alcohol lamp.

DOMESTIC FILTERS

are frequently made in the form of a submerged jar or box composed of porous stone, through which the water passes and is withdrawn by an exterior faucet, as represented at *c*, Fig. 1. In another form the filter is placed within a barrel, and the water passes through a coarse filter, D, Fig. 2, and up a central tube, C, to an upper chamber and thence through filtering material placed between two perforated diaphragms, F G. The water is drawn from the lower annular chamber by a siphon, G', having a stop cock at its lower end. A good domestic filter is easily constructed of a deep wooden tub divided by a tight vertical partition through the middle, the partition being perforated near the bottom. The tub should be nearly filled on both sides of the partition with granulated charcoal, made from sugar maple and screened through a mesh of one sixteenth of an inch, the fine dust being separated by bolting. The foul water enters the tub on one side, passes down and through the holes in the partition, and rises up on the other side, leaving all its impurities in the charcoal. Fig. 3 is a

Fig. 2.

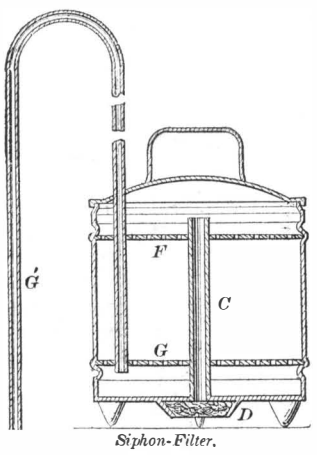

Siphon-Filter.

REVERSIBLE FILTER

interposed in a length of pipe. The water flowing from A to the filtering surface, T, has its impurities detained, while the strained water runs off at B. When the filter surface, T, has become foul, the handle, H, is turned, throwing the dirt to the delivery side, where it carried off by the current of passing water. A

Fig. 3.



Reversible Filter.

CHARCOAL FILTER

in shown in Fig. 4, which is used for sugar refining. Upon the bottom of a high cylindrical vessel, which is charged with animal charcoal, C, a filter cloth is spread, and upon this the lower charcoal layer is tightly packed, while the remainder of the filling is left loose. Another cloth and a perforated plate complete the column. The sirup to be filtered is let in from the cistern, S, the supply being regulated by the ball cock, *b d*. *t* is a tube by which air is allowed to escape, and *m* a manhole for giving access to the interior for cleansing, etc. An arrangement of a filter in connection with a cistern is represented in Fig. 5. The water passes down through the

*Published in numbers by Messrs. Hurd & Houghton, New York city.

Fig. 4.

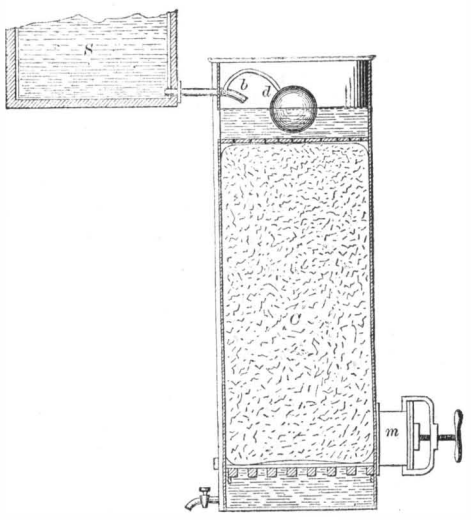

Charcoal-Filter.

charcoal or other filtering material in a permanent chamber, on one side of an axial division, and, after passing beneath the latter, rises up and is drawn off from the other side.

Fig. 5.


Filtering-Cistern.

In order to ascertain the quantity of a liquid discharged or received through an orifice.

MECHANICAL LIQUID METERS

of various forms are employed, the principal being known as the diaphragm, the balanced (in which compressed air is used), the piston, the propeller, and the flexible tube and roller.

In Fig. 6, at A, is shown

THE SIEMENS AND HALSKE SPIRIT METER,

which registers the quantity of spirit discharged and also the amount of absolute alcohol contained therein. The liquid entering at *a* passes through the pipes, *c d*, one of which terminates in a chamber, *e*, whence it is carried by the pipe, *f*, through the vessel, *g*. The other conducts it directly to the upper part of *g*. The parts of the pipes passing through *g* are perforated so as to make currents in the vessel in order thoroughly to mingle the spirit, and the two pipes meet at *h*, whence the liquid is led by *i* into a chamber, *j*, and thence to the volumeter,

Fig. 6.

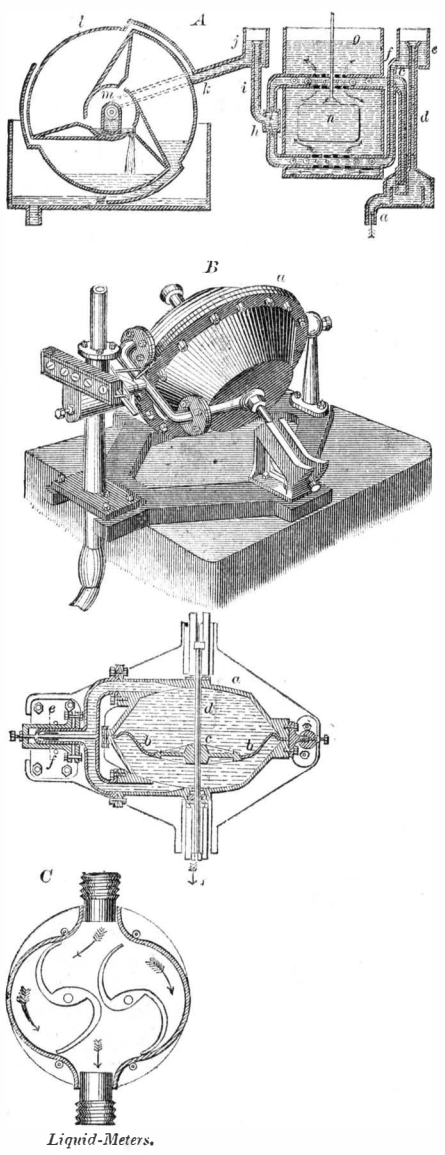

Liquid-Meters.

which is a hollow drum, *l*, having a concentric cylinder, *m*, the space between the two being divided into three compartments. Three slits in the central cylinder permit the liquid to flow successively into each compartment, as it in turn occupies the lowest position, and the apparatus remains stationary until the lower chamber is full. The discharge of this then begins, while the aperture through which it received its supply is carried, by the rotation, above the liquid in the central chamber. The registering dials are actuated in the usual manner. The amount of pure spirit is determined by a hydrometer, *n*, in the tank, *q*, the instrument being filled with alcohol, and rising and falling according to the density of the spirit. Its motions actuate suitable registering devices which give an indication each time the volumeter is emptied, and to an extent showing the quantity of pure spirit contained therein.

DUBOY'S WATER METER

is represented at B. A diaphragm, *b*, in a casing, *a*, carries a closely fitting metallic disk, *c*, held in position by the rod, *d*. Water enters through either duct, *e* or *f*, raises the diaphragm, and forces out the water on the opposite side until the vessel is full, when the diaphragm fits against that side. When the weight rises to the top, that side is given a preponderance, causing the vessel to turn on its pivots until the relative places of the sides are changed. At the same time, the supply opening is closed and that for discharge opened. Payton's meter, C, same figure, contains two S-shaped arms, whose extremities are during rotation in close contact with each other and with the sides of the box. The arrows indicate the direction of the current.

ATWILL'S PULSATING PISTON METER,

Fig. 7, has a piston, E, which turns on an axle shaft com

Fig. 7.

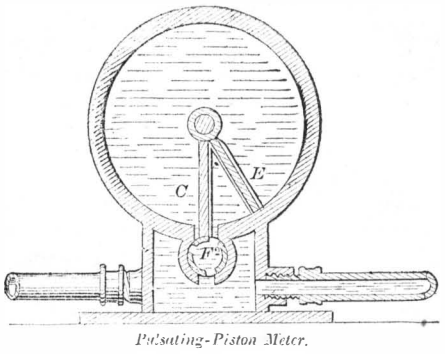

Pulsating-Piston Meter.

municating motion to the register and carrying an arm which, at the end of each stroke, changes a cylindrical valve, F², so as to cause the water alternately to enter and discharge from the measuring chamber at opposite sides of the internal partition, C. The spiral vane meter, shown in Fig. 8, is simply a water wheel within a pipe connected to a register to indicate the flow of water. The flow is regulated by a sliding valve. In

YOUNG'S SPIRIT METER,

same figure, a float, G, in the measuring chamber, is at-

Fig. 8.

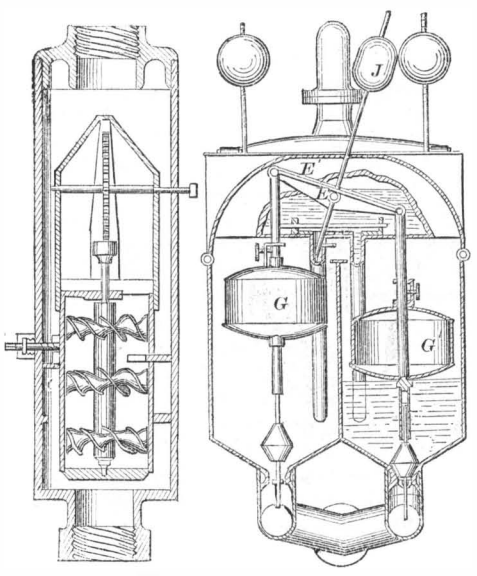

Spiral-Vane Meter. Young's Spirit-Meter.

tached to each end of a pivoted beam. The alternate downward motion of the floats, as the chambers are discharged,

Fig. 10.

Fig. 9.

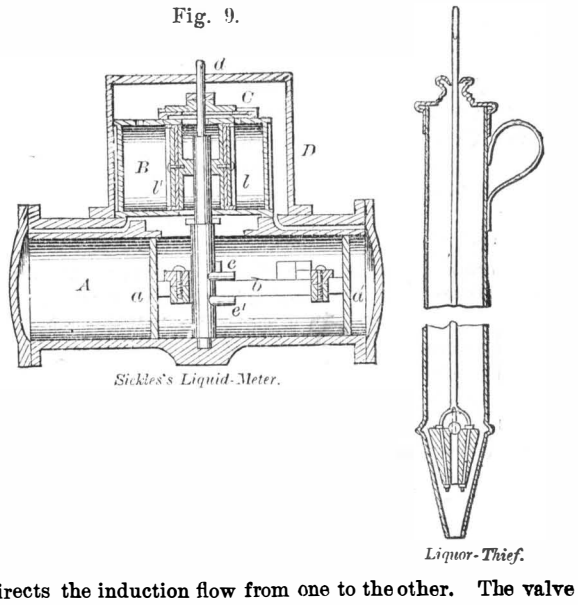

Sickles's Liquid-Meter.

Liquor-Thief.

directs the induction flow from one to the other. The valve stems have a limited sliding motion in the floats, so that each

© 1875 SCIENTIFIC AMERICAN, INC.

of the latter will rise to a sufficient hight without raising the valve to permit of emptying the chamber. At the point of discharge, the weighted rod, J, is thrown past the vertical and, closing the valve to one chamber, opens the induction pipe to the other, depressing that float sufficiently to close the escape valve. In

SICKLES' METER,

Fig. 9, the liquid flowing into the chamber, D, is, by means of the valve, C, admitted alternately to each end of the hollow valve, B, which is divided into compartments by the partitions, *l l'*. From these the fluid flows alternately through appropriate ports behind the pistons, *a a'*, on the rod, *b*, which has tappets that strike the pins, *e e'*, on the upright shaft, *d*, causing its partial rotation and operating the slide valve, C, which admits the fluid into the compartments of the valve, B.

We add, in Fig. 10, one more device used in connection with liquids, to which the name of

LIQUOR THIEF

has been applied. It is simply a tube which is let down through the bung hole of a cask and then closed, so as to withdraw liquid therefrom. It is closed at the bottom by a plug, actuated by a rod passing through the top, as shown.

PRACTICAL MECHANISM.

BY JOSHUA ROSE.

NUMBER XXXVIII.

MARKING OUT ENGINE GUIDE OR MOTION BARS.

If an engine guide bar is to be made parallel in its breadth and thickness, it may be marked off from the directions already given for marking a scale. Such bars, however, should always be made thicker in the middle than at the ends (as they are always made in English locomotives) for the following reasons: If the strain upon the bars is equal at all parts of the stroke, the middle of the bar will be subject to deflection because of its distance from the blocks or supports at the ends. Again, towards and at the end of the stroke, the connecting rod stands nearly parallel with the center line of the bore of the cylinder, and then the strain upon the guide bars is very slight; but as the stroke proceeds, the angle of the connecting rod increases until (near the center of the stroke) it becomes the greatest, and therefore places the most pressure upon the guide bars. If, then, the latter deflect in consequence of this pressure, the gland and packing ring in the cylinder cover act as a fulcrum, and the piston rod as a lever, forcing the piston against the top and bottom of the bore of the cylinder, tending to wear it oval and also to wear it to a larger bore in the middle than at the ends, because the deflection of the bar is inappreciable at the ends, whatever it may be in the middle. That the deflection of such bars is sufficient to be of practical importance will be perceived from the following:

During the years 1864, 1865, and 1866, I fitted up under contract nearly one thousand guide bars (for locomotives) their average size being about 30 inches long, 3½ inches broad, and 1⅛ inches thick or deep at the ends, and 3 inches thick in the middle of their length. They were filed up in the vise, and made practically true to a surface plate. When the first few sets were delivered to an inspector for examination, they were rejected on the ground of being hollow in their length, to a degree plainly perceptible in the surface plate marks, which showed very plainly at the ends of the bar, and graduated away until, in the middle of each bar, they were barely perceptible. This difference was obviously in the wrong direction, since the middle of the bar should, if there be any difference, mark the plainest, because it sustains the most abrasion. I was sent for by the inspector, who had a bar placed upon the bench, supported by a block of wood under each end; and by request, I applied the surface plate, and found, to my astonishment, the marks to be as above stated. As a consequence, the whole of the set of eight bars were returned to me to be refitted. Upon replacing them in the vise and applying the surface plate, I found each bar to mark as true and even as could be desired, and hence returned them untouched, perceiving that the bars, stout as they were, deflected from their own weight, the amount of the deflection being doubled by supporting them, in the one case in the middle and in the other by the ends. The inspector claimed that, by testing the bars while supported at their ends, he had tested them in the position in which, and supported them as they would be, when in their working places: but since no provision had been made for holding them (while being filed up) in that position, and since the top bars stand upside down when upon the engine, it was plainly impracticable to file them up in such a position. The bars were passed, the controversy having served to demonstrate their appreciable deflection, and also that the bottom bars should be filed up a little rounding and the top ones level in their respective lengths. To mark off such a bar as is here described, one face must either be first trued up, or the marking-off must be performed at two separate operations. The better plan is for the marker-off to examine the bar as to size, and have one face planed off. If either face appears defective, it should be the first planed. If the bar appears sound all over, the outside edge face of the bar should be the one to be planed off preparatory to marking off; and in setting it to surface it, care should be taken to set it true with the top and bottom faces, if they are parallel to each other; and if not, to divide whatever difference there may be between them. The bar may then be placed upon the marking-off table in the position shown in Fig. 177, A being the marking-off plate, B the guide bar, C C pieces of wood to lift the bar off the plate. By means of small thin wedges, the planed face, B, of the bar is set at a true right angle to the surface of the plate, and tested by a square. The next operation is to mark off the top or uppermost face, and the question here arises: Shall it be so marked that there will be an equal amount of metal taken off the top and bottom faces, or otherwise? First, then, since the quality

Fig. 177.



of the metal is the best towards the surface, it is a consideration to take off as little as possible, so as to leave a hard wearing surface; this may appear a small matter, but it is always right to gain every superiority attainable without cost. Therefore, all other things being equal, we should prefer to take as little metal off the top face as would be sufficient to make it true, and should therefore mark it out with that view. Here, however, another consideration arises, which is that the outline of the bottom face is not straight, and cannot therefore be planed lengthways from the center of the bar to the ends; and if such bottom face is to be shaped across its breadth, instead of lengthways, it is a comparatively slow operation, and much time will be saved by so marking off the bar that the bottom will only just true up, so that all the surplus metal will be cut off the top face, which, being done in a larger machine, and lengthways, is a much more rapid operation. There is, however, a method of obtaining both the advantage of taking as little as possible off the top face, and planing the bottom face for the most part lengthways. It is shown in Fig. 178, A being the bar;

Fig. 178.



the two faces, B B, may be first planed parallel (as required) with the face, C; the back of the bar may then be planed in two operations from the point, D, to the junction with B at each end. Were the method of procedure employed, it would pay to leave the most metal to come off the back of the bar; but there are yet other considerations, which are the facilities in the shop. If the shaping machines are not kept fully occupied, while the planing machines are always in demand, it will pay (if there are not many bars to be planed) to leave as little as needs be to be taken off the bottom of the bar and the remainder off the top. If, however, many bars are to be planed, the most economical of all methods will be to plane the backs by placing, say, 8 of them at a time across the table of the planer, cutting off the ends at the same chucking. Supposing this plan to be adopted, we set the scriber of the marking block just below the lowest part of the surface of the bar, and draw a line along its planed surface, and then another line along each end, to denote the thickness of the parallel parts at each end, making this line longer than is necessary, as a guide in setting the bar in the shaper (in case the ends are shaped and not planed). We next mark off the length of the bar at the ends, using a square and allowing about an equal amount to be taken off each end; and then, still using the square, we mark a line equidistant between the end lines, to denote the center of the length of the bar, which will then present the appearance shown in Fig. 179, the inside line, A A, being for the top

Fig. 179.



face, the lines, E, for the parallel ends, the lines, B B, for the ends, and the line, D, denoting the middle of the length of the bar. We now turn the bar so that its planed face is uppermost; and setting a pair of compasses to the required thickness of the middle of the bar, we set one point at the junction of the lines, A and D, mark off with the other point a half circle, and then (turning the bar over) adjust it upon the table, as shown in Fig. 180, A being the table, and B a

Fig. 180.



block of wood and wedge to adjust the bar so that, if the scribing block be applied along the table, the needle or scriber point will mark just fair with the top of the circle at D and the mark, C, at the end of the taper part of the bar, A (the mark, C, showing the required distance from the end of the bar). Having made the adjustment, we draw the line, E, thus completing the marking of that half of the bar. We next remove the block of wood and wedge to the other end of the bar, and repeat the last operation, when the marking of the bar will be, so far as its outline is concerned, complete. It will be observed that we have drawn the lines in each case on the one planed surface of the bar only, and not all around the work. The reason for this is that the planed face is a guide, whereby to chuck the work and ensure its being set true. In the absence of one true face, it would be necessary, in marking off the first face, to mark the lines all around the work, which, when planed up, would serve as a guide whereby to set the work during the successive chuckings.

After the faces and ends are planed up, the holes in the ends may be marked by the compass calipers and compasses, as shown in Fig. 181, A being the bar, and B B the compass



Fig. 181.

calipers set to the required distance. At the junction of the marks thus made, we make a light centerpunch mark, and mark off the circles for the holes, first marking a circle of the requisite size and defining its outline by other light centerpunch marks. We next draw from the same center a circle smaller in diameter, and define its outline also by small centerpunch marks; after which we take a large centerpunch, and make a deep indentation in the center of the circle, which will appear as shown in Fig. 182. The philosophy of

Fig. 182.



marking the holes in this manner is as follows: If the outside circle alone is marked, there is nothing to guide the eye during the operation of drilling the holes (in determining whether the drill is cutting the holes true to the marks or not) until the drill has cut a recess nearly approaching the size of the circle marked; if the drill is not cutting true to the marks, and the drawing chisel is employed, it will often happen that, after the first operation of drawing, the drill may not yet cut quite true to the marks; and it having entered the metal to its full diameter, there is no longer any guide to determine if the hole is being made true to the circle or not. By introducing the inside circle, however, we are enabled to use the drawing chisel, and therefore to adjust the position of the hole during the earlier part of the operation; so that the hole being cut is made nearly if not quite true before the cutting approaches the outer circle, which shows the full size of the hole. If, on nearly attaining its full diameter, the outer circle shows it to be a little out of truth, the correction is easily made. It is furthermore much more easy to draw the drill when it has only entered the metal to, say, half its diameter than when it has entered to nearly its full diameter.

The object of making a large centerpunch mark in the center is to guide the center of the drill, and to enable the operator to readily perceive if the work is so set that the point of the drill stands directly over the centerpunch mark. This is of great importance in holes of any size whatever, but more especially in those of small diameter, say, for instance, ¼ inch, because it is impracticable to describe circles of so small a diameter whereby to adjust the drilling; and in these cases, if the drill runs out at all, there is but little practical remedy. The centerpunch marks for such holes should therefore be made quite deep, so that the point of the drill will be well guided and steadied from the moment it comes into contact with the metal, in which case it is not likely to run to one side at all. If a motion or guide bar requires to have one corner rounded off, as it should have to prevent its leaving a square corner on the guide block, which would weaken the flange of the latter, the corner cannot be marked off, but a gage should be made as shown in Fig. 183, A in the left hand

Fig. 183.



figure being a piece of sheet iron, say $\frac{1}{32}$ inch thick, with the lines, B and C, and the quarter circle, D, marked upon its surface. The metal, G, is then cut away, and the edges carefully filed to the lines, thus forming the gage, A, which is shown upon the bar, F, in the position in which it is applied when in use. It is obvious that such a gage will scarcely suffice to get up a very true round corner; this, however, is accomplished by leaving the corner of the work a little full to the gage and then filing it up to the piece of work fitting against it.

Reference having been made to drawing the position of the recess formed by a drill before it has entered the metal to its full diameter, we may as well explain that process. Suppose A, in Fig. 184, to represent a piece of metal requiring to have a hole of the size of the circle, D, drilled in it, and that the recess cut by the drill is out of true, as shown by the circle, C. A round-nosed chisel is then employed to cut, at D, the groove there shown, running from the outside to the center of the recess, and which will have the effect, when the drill is again introduced, to draw the recess toward that side, thus causing the recess to be true with the marks.

Fig. 184.



THE largest flouring mill in America, it is said, is owned by Hon. C. C. Washburn, of Minneapolis, Minn. It is seven stories high, and crowded with machinery from top to bottom. Its cost was $300,000, has 40 run of burrs, and turns out 1,000 barrels of flour per day.

© 1875 SCIENTIFIC AMERICAN, INC.

MILLER'S RECOIL CHECK FOR GUNS.

We illustrate a novel invention which is quite sure to be appreciated by soldiers, sportsmen, and all who handle fire-arms to any extent. Regulation rifles frequently kick with tremendous vigor, and there are few of our hunting readers who will not be able to recal lame shoulders and perhaps a few bad bruises, produced by the unexpectedly forcible recoils of their guns, especially in duck and pigeon shooting. The present device is intended to check this backward blow by neutralizing the same through the medium of a spring, and thus to admit of the use of much heavier charges in the piece and to insure steadiness of aim.

The exterior of the invention is shown in Fig. 1. From the section, Fig. 2, it will be seen that the hinged check plate, A, is applied to the lower part of the stationary butt

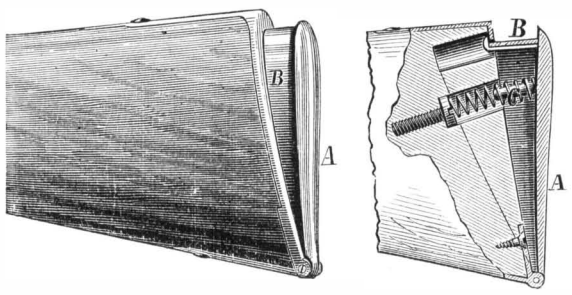

plate, and is guided by the portion, B, entering a suitable recess in the stock. Its outward movement is regulated by the flanged edge of said portion, B, which catches on the butt plate, as shown. C is a center pin on the check plate, which is surrounded by a coiled spring. The latter holds the device out from the butt, and also yields before the shock, thus breaking the force of the same, and rendering its effect upon the shoulder a mere push instead of a sharp blow. By means of the screw which holds the spring, the tension of the same may be regulated at will.

The invention is readily constructed, and may be applied to any gun. Patented through the Scientific American Patent Agency, November 2, 1875. For further information address the inventor, Mr. W. D. Miller, care of J. H. Johnston, Great Western Gunworks, Pittsburgh, Pa. A working model is on exhibition at the jewelry store at 843 Broadway, New York city.

IMPROVED UNIVERSAL WHEELWRIGHT'S MACHINE.

We illustrate herewith a new universal wheelwright's machine, which is designed for planing the rims of vehicle wheels on three sides after said rims are driven on the spokes. When the rim consists of short sections, it is necessary that each section shall conform to a circle greater than the circle of the wheel, so as to give a rise at the joints, which the tire will bind down, thus strongly arching and bridging these weak points. In order to produce this rise, the fellies are generally shaped out to the desired circle before they are driven on the spokes. They always, however, need redressing by hand, as the aforesaid work cannot be performed with sufficient accuracy to insure the meeting of the joints either on the periphery, the face, or the rear sides. It is also necessary to form the rim, when finished, thicker where it rests upon the spokes than under the tire. This labor, in common with the foregoing, has also heretofore been accomplished by hand. With the present machine the whole is quickly done in a single operation.

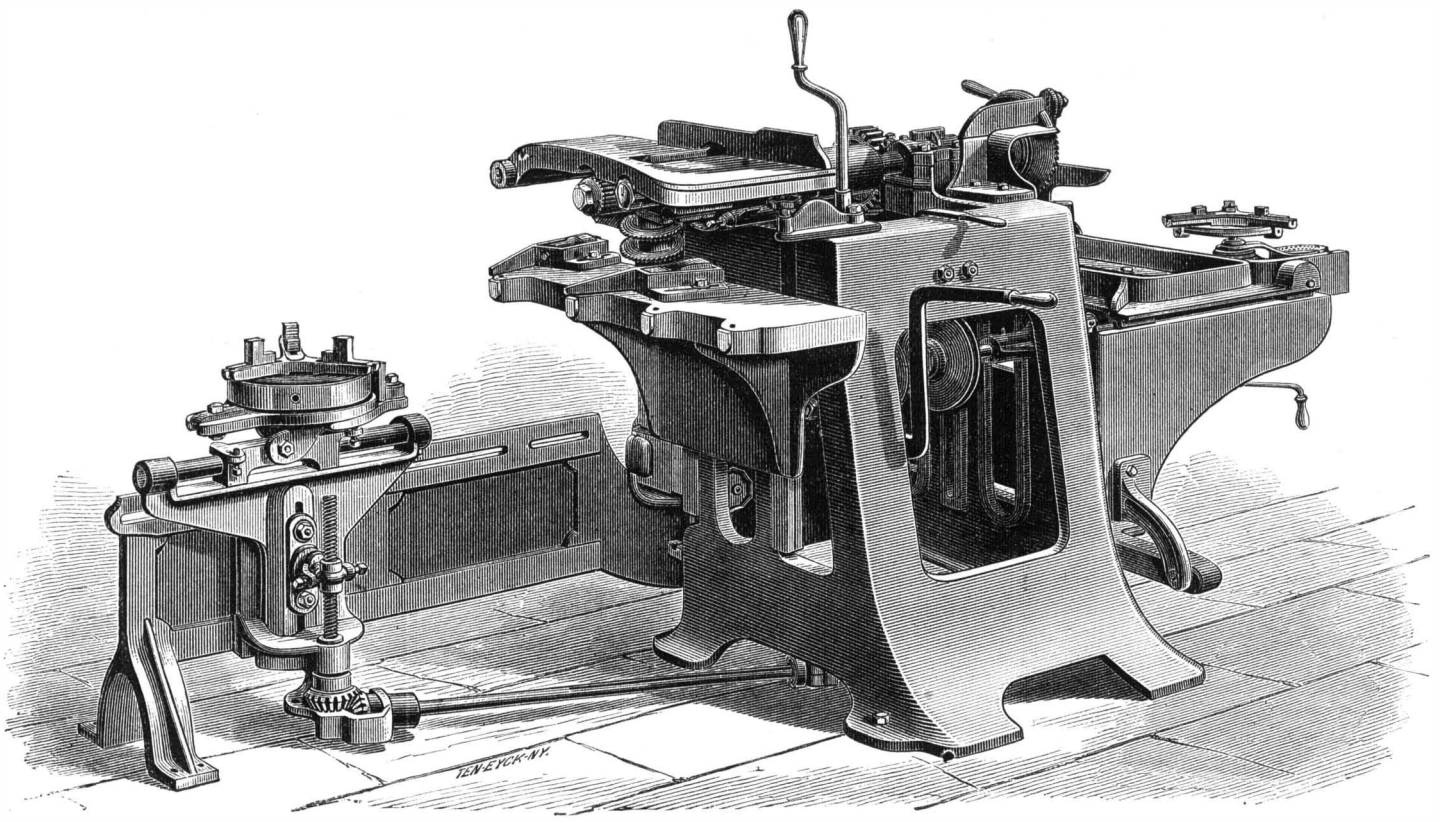

BUFFINGTON AND FORNEY'S WHEELWRIGHT'S MACHINE.

In construction the apparatus resembles a "two-sided sticker," having a horizontal and vertical mandrel with self-feeding arrangements. It has also a buzz planer table over the horizontal cutter head. Extending out from the front side of the machine is an arm, upon which suitable devices are mounted for carrying a self-centering chuck, in which the wheel is held by the point of the hub during the planing of the rim. To this chuck, a cam-shaped disk is attached, which has as many faces as there are joints or sections in the wheel rim. The wheel is fastened in the chuck, so that the joints in the rim correspond with the high points of the cam. The wheel now being elevated to the proper hight by means of a screw, friction gears, and lever, it is moved toward the machine, the chuck, to this end, being mounted on a collar, loosely fitted on a sleeve and having about ten inches to-and-fro play. The face of the wheel rim then resting over the horizontal cutter, the buzz planer table is lowered to give the required depth of cut, and the wheel is rotated and planed to a true face. The table is raised so as to taper out the cut gradually, leaving a true surface. The wheel and chuck are then moved back to allow the rim to clear the buzz planer, when they are both lowered until the rim rests on three stops. The operator now pushes the wheel toward the machine, the rim sliding under the horizontal cutter head and feed roller, and the periphery coming in contact with the vertical cutter, which is composed of bevel saws. The nut on which the chuck is mounted rests against a stop, preventing the movement of the wheel toward the machine. The feed roll then rotates the wheel, the horizontal cutter planes the rim to thickness and the required bevel, and the vertical head dresses the periphery.

The cam-shaped disk resting against a stop gives the wheel a vibrating motion to and from the vertical cutter head, by which the rise at the joints is produced. The wheel is so placed in relation to the line of the feed roll shaft that the latter is inclined to draw the wheel toward the machine, always keeping the cam against the stop, causing a uniform vibration. Bent rims are dressed to a true circle by removing the stop, so that no vibration whatever is imparted.

It is stated that with this machine the wheels are made with certain uniformity, that all ordinary material can be planed straight out of wind and square on the buzz planer table, and to thickness on the sticker table. A saw board or table, can be substituted for the buzz planer table, and a saw for the cutter head, when all kinds of straight sawing can be done. If it be desired to perform a still greater range of work. one of Messrs. Bentel, Margedant, & Co.'s universal wood-worker tables, with back top, bevel rest, gaining frame, etc., may be attached.

On the reverse side of the machine, a spoke-sawing wheel and a tenoning and boring apparatus is arranged, the whole of simple construction. The hollow auger is secured to the mandrel and carries a dished saw which, at one rotation of the wheel, saws off the spokes and bores the tenons. Wheels from 30 inches to 6 feet in hight may, we are informed, thus be tenoned as desired. The change from a wheel tenoner to a boring or routing machine may be quickly made without the use of a wrench, and all kinds of boring may then be done. Two men may operate, on opposite sides of the machine, on different work at the same time. A horizontal shaper may be made of the rim planer which will shape, round, and corner all ordinary work. The capacity of the rim planer is 35 to 50 sets of wheels in ten hours; that of the wheel tenoner is much greater. The wheel tenoner is, if desired, made separate, and with or without the boring attachment. The varied capabilities of the machine apparently fully justify its title of universal. In point of economizing room and in combining the functions of several usually distinct machines, the invention will prove one of much utility to wheelwrights and wood workers generally. Manufactured by Messrs. Bentel, Margedant, & Co., Hamilton, Ohio. For further information, address the patentees, Messrs. Buffington & Forney, Burlington, Iowa.

AN article called fish flour has been brought forward in the last few years. The flour is prepared from dried fish, thoroughly desiccated, and then ground in a mill.

VON BULOW, the pianist, says beer drinking is the great fault of his countrymen. They do not get drunk, but drink till their blood becomes sluggish and their brains stupid.

AMERICAN SILK-SPINNING MACHINERY.

It is estimated that 6,000 persons are employed and over $10,000,000 capital invested in the extensive silk factories of Paterson, N. J. The process of silk making begins with the assortment of the skeins of raw silk, which are imported from Japan, Italy, China, and France; then follows washing in soap and water to get rid of the gummy material left by the worm, and then drying in an ingenious apparatus which throws out the water by centrifugal force. Winding next follows, when the silk is wound off from the skeins upon

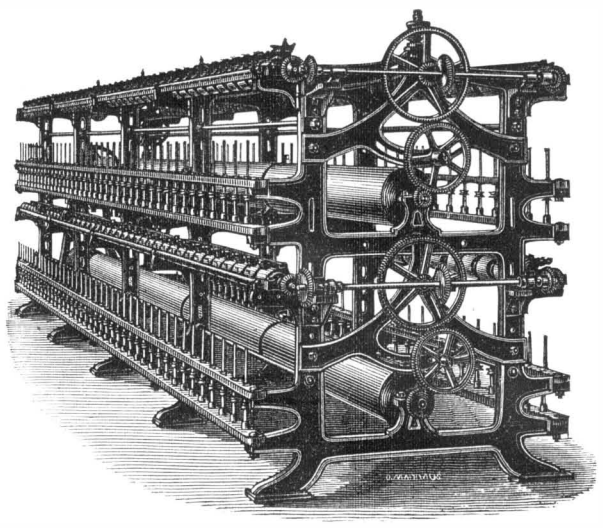

bobbins, after which the bobbins are taken to the doubling rooms, and there the silk from two, three, or four spools is wound together upon one. Finally the silk is spun, and this is done upon spinning frames of two or three stories and containing hundreds of spindles which revolve at a very high velocity.

The manufacture of these frames has recently been begun by the Danforth Locomotive and Machine Company, of Paterson, N. J., and numerous improvements have been added. We give herewith an engraving of t he two story frame, which is adapted to either tram or organzine, and is made of any desired length and to contain any required number of spindles. The latter are adjusted with nicety, and are capable we are informed, of running at a speed of from 7,000 to 8,000 revolutions per minute without perceptible wear. The machine also has a longer drag than is usual, which gives the thread a better opportunity to become properly twisted, and thus free from the kinks or curls so annoying to silk manufacturers.

Silk making in Paterson, in Hartford, Conn., and in some localities in this city is an industry of which the growth has been more rapid than is generally realized throughout the country.

The exhibition of silk machinery of American production, which, it is promised, will be made at the Centennial, will, we believe, attract the attention of manufacturers the world over, and perhaps serve to emphasize the fact that already excellent silks of American make are found on the counters of the dry goods warehouses, in close and in some cases successful competition with those from celebrated foreign looms. It is very much to be regretted that a recent conflagration in Paterson has destroyed a large amount of very fine silk machinery, including two large looms especially constructed for exhibition at the Centennial.

New Mode of Illumination for Lighthouses.

Professor Batestrieri, of Naples, proposes for this purpose an apparatus composed of several disks of polished silver or copper, so arranged as to transmit successively the light received, so that all the rays falling upon the disks are concentrated into one powerful beam. The invention resembles the system of Fresnel, but the latter utilizes only about one third the light received, while M. Balestrieri's device, it is said, utilizes the greater portion. With an oil lamp having a burner 2·7 inches in diameter, at a test of the above described apparatus, a beam of light was transmitted which enabled a newspaper printed in ordinary type to be read at the distance of 0·6 of a mile.

© 1875 SCIENTIFIC AMERICAN, INC.

GREENHOUSES AND HOTHOUSES.

The long winter of our Northern and Middle States tries the patience of our gardeners, and renders doubly acceptable any hints and directions for the construction of greenhouses, wherein plants can be nurtured till the advent of spring; and where propagation can be carried on, so that a large supply of plants, both for flowers and fruit, may be ready for planting out as soon as the frost leaves the ground.

Where the horticultural operations are extensive, the plan shown in our Fig. 1 is perhaps the best that could be adopted. The buildings can be constructed of any required size, and the heat is well confined to the back of the house by the brick wall. Flues are built in the wall with furnaces at the ends; or steam or hot water pipes are used for heating. Grape vines are usually trained under the sloping roof, and thus enjoy the maximum of light and sunshine. The wall is very handy in a fruit garden, even when not covered with glass. Fruit on trees trained against a brick wall (as shown on the left of Fig. 1) ripens much earlier; indeed, in England peaches and nectarines will hardly ripen at all in ordinary seasons unless the trees enjoy the reflected heat from a wall, which, by the way, should be painted black.

Fig. 1

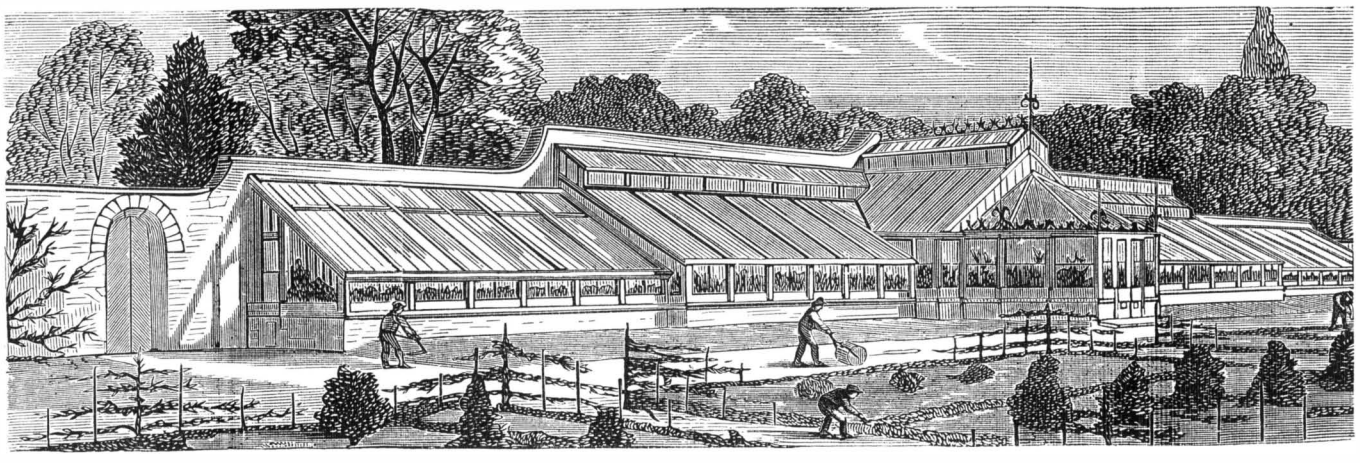

RECENTLY CONSTRUCTED HOTHOUSES.

Gardeners who devote much time to the cultivation of the grape will find the glass frames, shown in our Fig. 2, economical and efficient. The timber used in making them is small in quantity, and the glass is well placed to ripen the fruit. Air is readily admitted to the vines by raising the glass frames, the hight of which can be adjusted by the attachment shown in the engraving, which displays the construction so clearly that no further explanation is necessary.

Another convenient form of glass frame is shown in Fig. 3; it is especially suitable for use on hotbeds. Being of little depth, the sun's heat is concentrated by the glass on the rich earth of the well manured bed; and the frames, which are well suited to cucumbers, melons, and early tomatoes, are so constructed as to slide open for purposes of ventilation.

Winter is the time when people are most apt to feel the need of a greenhouse; and if they do not construct one then, they usually get their plans perfected, and begin building in the early spring. We have published illustrations of more elaborate and expensive greenhouses than the one represented herewith; but we have seen none in which the arrangement is better, and the cost of construction less, than the one shown in Fig. 1. While Fig. 2 and 3 present no special novelty, they are each well adapted for the different purposes for which they are intended, and can be built cheaply.

PLANT VASES FOR INDOOR DECORATION

The votaries of floriculture are now turning their attention indoors, and inquiries as to proper and tasteful modes of parlor and dinner table decoration are beginning to reach us. The usual way of keeping plants in houses is to place them in vases or tazzas, of wood or pottery, although some are now made in bronze or iron, of very handsome designs; terra cotta is also employed, and, although cheaper than metal, is capable of equally effective ornamentation. Filled with a light earth, and covered with the moss called sphagnum, hardy and half hardy plants will thrive well in these vases; care must, however, be taken not to water them too profusely, as (there being no way of escape through the bottom of the vase for superfluous water) too much moisture will rot the roots.

The accompanying illustration represents a bronze tazza, ornamented with well known decorative plants. The margin is fringed with *isolepis gracilis*, used expressly to tone down the harshness of the metal work. Two or three plants of the palm-like curculigo, says a correspondent of the English *Garden*, from the pages of which we select the engraving, are placed in the center; and these, by furnishing bold and graceful foliage, contrast well with the horizontal lines of the tazza below, while their cool and deep-toned greenness forms a pleasing contrast to the character of the stand itself. Heaths and similar hard wooded plants are added, and with good effect.

Fig. 2

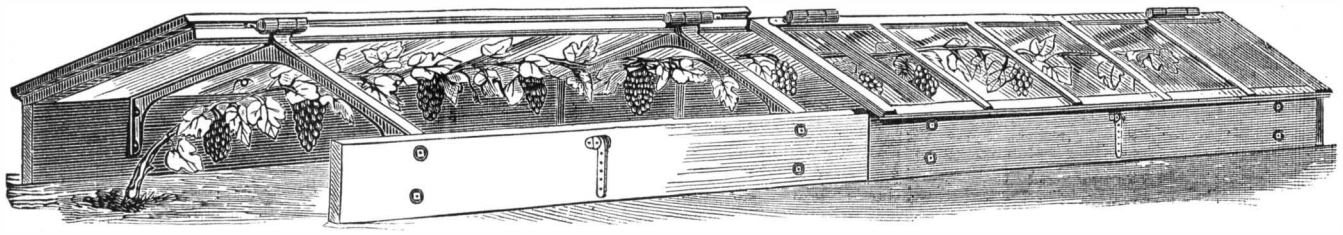

GRAPE VINE AND HOTBED FRAMES.

Fig. 3.



ORNAMENTAL PLANT STAND.

Take the Poles out of the Streets.

Complaints are frequently made against the objectionable practice of the telegraph companies in placing their poles in the streets of cities; and the popular belief is that the wires ought to be put underground. It is true that the main streets of New York are sadly disfigured by the clumsy wooden poles, and probably no improvement can be expected until we have a better city government. But the idea that it would be easily practicable to work the wires underground is a mistake. They could, however, be taken out of the streets and placed above the buildings, as in some cities, and we hope the time is not far distant when this desirable change will be made. As to underground wires, they cannot be easily worked, even when carefully insulated, on account of the interference of static induction. All telegraph wires, without regard to their position, are thus affected, but wires placed underground or in water are affected 50 times as much as those which pass through the air, the amount of the static charge in aerial wires being inversely proportional to the distance of the wires from the earth. The amount of the static charge in all telegraph wires, whether they are stretched through the air or buried under the ground, is proportional, also, to the length of the wire; and consequently an underground wire of half a mile to a mile in length may be worked without any inconvenience from the presence of the static charge, while one of greater length may give rise to the most serious trouble.

In London, all the railroads have stations centrally situated, most of the roads coming into the heart of the city. The South-Eastern Railway, for instance, has a station at Cannon street, which is only one third of a mile from the General Post Office, where the headquarters of the English telegraph lines are situated. Now, these telegraph wires are placed on poles and follow the lines of the railroads into the stations, where they first pass under ground, running as subterranean lines only from the railroad termini to the central telegraph station. Hence, the quantity of underground wire in London is comparatively small. In addition, it may be stated that in all parts of the city there are certain large distributing telegraph offices which are connected by wires with all the sub-stations in the city—of which there are 400 to 500—and every wire from each of these distributing offices to the several hundred sub stations is carried over the house tops; where there are several wires running to the same station, they are insulated on poles which are fastened to the tops of houses. In addition to those that have been mentioned, there are in London 800 private lines, running to all parts of the city. They use what are known as the Wheatstone dial instruments. There is not a single rod of wire working all these instruments that is under ground, the wires all being carried over the house tops. Frequently 40 to 50 insulated wires are made into a single cable, which is suspended on fixtures attached to the roofs of houses.

In 1854 a telegraph company was organized in England which constructed an underground line between London and Liverpool, 210 miles, the cable containing 10 wires. But in less than two years after the line was built, its insulation became so much impaired that the company was obliged to take up and replace a considerable portion of the cable. One wire after another still continued to fail, until there were only five of the ten that would work at all. After this, as others failed, sections of the underground line were abandoned, and wires placed on poles were substituted, until, finally, so much of the underground system had failed that the company decided to place the whole line on poles. The copper and gutta percha which constituted the valuable portion of the underground cable were taken up and sold for enough to replace the whole system with a good overland line. All similar lines that were ever constructed in England have been abandoned, except one of thirty miles, constructed by the government nearly three years ago as an experiment, which is the only line outside of the cities.

© 1875 SCIENTIFIC AMERICAN, INC.

In like manner, says Mr. G. B. Prescott, 20,000 miles of underground lines in En-gland, France, and Germany have been abandoned. In the city of New York there are over 5,000 miles of telegraph wires in operation, four fifths of which are used for local communications, stock-reporting instruments, and private lines.

If a law should be passed compelling the companies to place their wires underground, the whole system of communication would have to be changed. But, even were it practicable to work our system upon the underground lines, it would be impossible to place all the wires in the city of New York lone underground in less than four or five years.

The Manora Breakwater.

At a recent meeting of the Institution of Civil Engineers, the paper read was on "The Manora Breakwater, Kurrachee" (the design for which was illustrated on page 99 of volume XXVII. of the SCIENTIFIC AMERICAN), by Mr. William Henry Price.

It was stated that the Manora Breakwater was the most important feature of the Kurrachee Harbor Works, which were commenced in 1860, from the design of the late Mr. James Walker, assisted by Mr. William Parkes. Besides the breakwater the chief works were: In the lower harbor, a stone groyne 8,900 feet long, dredging and removal of rock; and in the upper harbor, an increase of one fourth to the area of the backwater, involving a new tidal channel 2½ miles long, crossed by a screw pile bridge 1,200 feet long, and an embankment 2,780 feet long, to close the old channel, also of a jetty 1,400 feet long, with quays. All these works were now nearly completed, and had already produced great benefit, the entrance having been made direct instead of circuitous, deepened 6 feet and sheltered, the anchorage space enlarged, and the internal accommodation improved. The trade of the port was $17,500,000 per annum, and railway communication with the Punjaub would further develope it. About $2,250,000 had been expended on the whole of the harbor improvements.

The Breakwater projected from Manora Point for a length of 1,503 feet, into a depth of 5 fathoms of water, in order to shelter the entrance from the southwest monsoon seas, and to prevent their tearing up sand from the bottom and depositing it as a bar. The characteristics of the sea, wind, and tides, as bearing on the design, were alluded to, and it was stated that the bottom was irregular near the shore. The structure consisted of a base of rubble stone, leveled off generally to 15 feet under low water; and on this concrete blocks, each weighing 27 tuns, were set on edge, leaning back at a slope of 3 inches to 1 foot, and without bond, two blocks forming the width and three the hight, and together making a square of 24 feet in cross sections, the top being about the level of high water. The rubble base was deposited from native boats, and was leveled for the superstructure by helmet divers. Two European mason divers were employed, and six native divers trained on the work, the latter chiefly for shifting the rubble. No accident occurred, and the party generally did not suffer in health. After mentioning circumstances which determined the use of concrete blocks and of Portland cement, particulars were given of the composition of a 37-tun block, the materials being cement, river sand, shingle, and quarry lumps, with salt water. The ratio of the bulk of the cement to that of the finished block was nearly $\frac{1}{11}$. About 3,500 tuns of cement were used. The mixing station, block ground, and molding of the nineteen hundred and seventy-two blocks, including three hundred and twenty-five of special smaller sizes, were then described; and it was remarked that the Messent mixers had been found very efficient. The blocks were sometimes used one month after being made, and once, as an experiment, a 27-tun block was safely lifted in seven days. When the work was fairly established, the blocks cost for current expenses $3.75 per cubic yard, though the average total rate was raised beyond this by extra expenses in the earlier stages.

The blocks were lifted on to the trucks by a steam hydraulic traveling crane of 50 feet span; each truck carried one block, and was taken separately by a tank locomotive to the breakwater. The blocks were set by a steam traveling crane, called the Titan, which ran on rails laid on the finished work, and overhung the end, so as to carry the blocks of three tiers in advance to their places, thus dispensing with staging. The framing of this crane supported a traveler and crab, worked by an 8-horse power engine on the top, which also drove the traveling gear of the entire machine. The cost of the Titan, delivered and erected at Kurrachee, was $14,395. The rate of setting was limited by the progress of the foundation and by the supply of blocks, but during the last season ten 27-tun blocks were set daily on an average, while on one occasion six blocks were laid in one hour and forty minutes without special pressure.

The base was commenced on the 17th of March, 1869; and later in that year the shore end stump, 45 feet long, to make a starting place for the Titan, with other preparatory works, was completed, after some unavoidable delays, and the first block was set on the 1st of November, 1870. The delays of the foundation were merely felt in the first season's work, but a length of 225 feet was built in four months, taking the breakwater out to 270 feet from the shore. During the second season, 1871-72, after a few days spent in repair of monsoon damages, a length of 523 feet was built in about four months, making a total of 793 feet. During the third season, after the repair of monsoon damages, a length of 710 feet was built, completing the breakwater on the 22nd of February, 1873, to its full length of 1,503 feet, which had thus been barely twelve months in actual building.

The action and effect of the monsoon sea, and the repair of damages, were then detailed. In 1871 the center joint opened here and there, and one block was over from the top course on the harbor side. Slight damage also occurred to the shore end in the sea angle. The nature of the settlement was described, also a curious rocking action, and the closing up of the cross joints under the action of the sea. The repairs of the damage, in the first season, cost $925. During the second monsoon, 1872, twenty-five blocks were washed out from the top course on the harbor side, eighteen of these block being, in one length, 86 feet. The damage was again traceable to inequality of settlement. The sea side did not suffer, nor did the shore end, though both showed evidence of the force of the sea. The damage was repaired in a few days at a cost of $2,560. The monsoon of 1873, the first after the completion of the breakwater, did trifling damage, and was confined to the shore half length, still pointing clearly to weakness of foundation. The repairs cost $995. In the monsoon of 1874, the outer end and scar, which had not then been in any way specially secured, lost five blocks during unusual weather, though no other part of the outer half length suffered, but the shoreward half opened here and there. The repairs of this season cost $2,090, and included the re-erection of an iron beacon on the outer end. The nature and extent of the subsidence (which in some parts amounted to 3 feet, but without dislocation), were then noticed, also the action of a mollusk, the pholas, on the concrete blocks, and the effect of the sea on the rubble base, which did not, however, affect the stability of the superstructure.

The cost of the breakwater had been $467,825, or $311.25 per lineal foot, but this amount included preliminary charges, the current expenses during the last season being only $170 per foot. This sum included the repair of damages during the progress of the work, and during the two monsoons since its completion, but not the expense of engineering and office establishment. The work had been carried on in the Bombay Public Works Department by the author and his assistants, advised by Mr. William Parkes, as consulting engineer, and without employment of any general contractor. The completion of the work was favorably noticed by all the government authorities concerned.

Recent American and Foreign Patents.

NEW CHEMICAL AND MISCELLANEOUS INVENTIONS.

IMPROVED HORSE-HITCHING DEVICE.

John Schoonmaker, New York city.—This consists in attaching to the reins rings which are caught upon hooks on the forward part of the wagon body, so that, should the horse attempt to run away, the whole weight of the wagon will come upon his mouth and hold him back.

IMPROVED STILL.

Henry Deymann and Edward Melchers, Toledo, Ohio.—This inventor proposes an improved column for refining stills, in place of the so-called French column, so that a finer spirit, with less steam pressure, is produced by means of simpler construction, which prevents leakage, decreases the trouble and expense connected with the repairs of the French column, and which may be put in the space of one story, with a considerable saving in copper plate. The essential features consist in arranging the chambers of the columns, on opposite sides thereof, with alternating horizontal and vertical partition plates and connecting overflow pipes and draining stop cocks. The intercommunicating arrangement of the chambers virtually produces two columns in one, so as to require about half the hight and material only, and offers the advantage of having all the overflow pipes at the outside.

IMPROVED INKSTAND.

Herman Schirmer, Wheeling, W. Va.—This is an ink vessel with an inverted conical tube extending nearly to the bottom of the vessel, and having an orifice at the lower end in connection with an air regulating device by which the hight of the ink in the tube is regulated.

IMPROVED PHOTOGRAPHIC PLATE HOLDER.

Frank A. Howson and William S. Howson, Brooklyn, N. Y.—This is an improved combination holder for the ground glass and plate for photographic cameras, by which, in every case, the exact image that was focused on the ground glass is obtained with perfect certainty on the sensitized plate. By its use the ground glass door of the camera may be dispensed with. The device is provided with lower grooved glass holders, glass buttons or studs at the top, and a side support, on which the ground glass and plate are insulated, and securely fastened by a spring top plate.

IMPROVED MONUMENT.

John N. Wallis, Fleming, and Theodore Wallis, Scipio, assignors to themselves and James A. Moore, Auburn, N. Y.—This inventor proposes gravestones of a more tasteful form than those commonly used. He suggests making the monuments of stone and glass, having inclosed chambers for the preservation of flowers and other objects.

NEW HOUSEHOLD ARTICLES.

IMPROVED CURTAIN FIXTURE.

William H. Maine, Abington, Mass.—This is a spring curtain roller provided with a device for preventing the unwinding of the spring when the roller is removed from the brackets. A spiral roller spring acts on a spindle, revolves the same, and throws a pin instantly out of its seat against a cam of a sleeve, so as to retain the spindle and prevent the unwinding of the spring. The roller thus remains in locked position as long as it is out of the brackets, and is instantly available for use when replaced in the brackets.

IMPROVED COMPOSITION FOR SOAP.

William F. Darnoby, Nashville, Tenn., assignor to himself and Edward B. Stahlman, of same place.—This compound, the inventor states, is an excellent article both for laundry and toilet, and is very cheap. It is made of Kirk's double extract, Colgate's soda soap, sal soda, water, spirits of ammonia, ether, and oil of sassafras.

NEW AGRICULTURAL INVENTIONS.

IMPROVED CHECK-ROW ATTACHMENT FOR CORN PLANTERS.

George C. Flagg, Columbus, Ill.—This includes several new and ingenious devices, so constructed that wheels mark the rows in one direction and marker arms mark it in the other direction. The machine is so guided that the ends of the inner markers may meet, or nearly meet, the ends of the marks made by the outer markers upon the previous crossing, so that the ground is marked in accurate check row by the machine crossing the field in one direction.

NEW MECHANICAL AND ENGINEERING INVENTIONS.

IMPROVED CAR COUPLING.

Oscar E. Ford, Meridian, Miss., assignor to himself and Min or B. Clinton, Dallas, Tex.—This coupling consists of drawheads with forward-projecting parts, which are recessed at their inner sides, and provided with laterally sliding spring-acting jaws that interlock by the entering of the projecting parts of the drawheads into the space formed by the shorter part. The drawheads are thus firmly connected without chance of getting detached, while the jaws have play in vertical direction by the widening of the recesses at the rear part, which allows the coupling of cars of different hights.

IMPROVED CRANK STOP.

William H. Phillips, Bridgeton, N. J.—The cranks of windlass and other shafts have been heretofore disconnected by the backward rotation of said shafts, but the shafts required to rotate several times in order to effect such result. This inventor effects the disconnection at the first backward rotation of the shaft, and to this end provides a pivoted catch, which engages a sliding piece that locks the crank to the shaft.

IMPROVED SPARK CONVEYER.

Charles K. Cullers, Bunceton, Mo.—This device is principally a kind of ball-and-socket joint for connecting the sections of pipe for conducting the smoke for the locomotive back along the top of the train to the rear end, the said joint being free to oscillate to any required extent, and allowing the necessary contraction and extension of the pipe, and at the same time keeping tight.

IMPROVED SADIRON SHOE.

Victor C. Thebaud, Buffalo, N. Y.—A large number of inventions are in existence for getting rid of the unnecessary weight of metal in flat irons, most of which accomplish their object by abolishing the fixed handle and substituting an adjustable one which will serve for several bodies. The present inventor suggests a very different plan, and proposes a shoe for the iron, which is easily attached and replaced at will, so that an effective ironing surface is always obtainable. The device is made with external flange, having curved side extensions at the front and a fastening screw at the rear part to be readily applied to the iron.

IMPROVED TREADLE FOR MACHINERY.

Andrew N. Hagerty, West Alexander, Pa.—This is an auxiliary treadle and connecting rod, in combination with the main treadle and connecting rod, to work a pawl for starting the machine by a ratchet wheel. The object is to insure the turning of the machine in the right direction, and to avoid the necessity of starting the balance wheel by hand, thus leaving both hands free for managing the work.

IMPROVED RAIL JOINT.

George A. Mead, Salem Center, N. Y.—In this device, the tongue or tenon of one rail enters a slot in the other. The slotted part is bolted together by a couple of bolts, arranged the same as in fishplate joints. The object is to make an endless joint, and to dispense with the fishplates commonly used.

IMPROVED WATER REGULATOR AND INDICATOR FOR STEAM BOILERS.

Dexter Cook, Elmira, Ohio.—This is a cylindrical tank traveling in vertical guides and supported by a spring. It is connected at top and bottom with the steam and water spaces of the boiler. When the water in the boiler falls below a certain level, the tank, becoming lighter, is raised by the spring, and the fact is indicated by a graduated scale and pointer and by a whistle allowed to sound by mechanism connected with the tank. The latter is also connected with a feed valve, so as to open the same, and thus allow water to enter the boiler when a deficiency is indicated, and closes the valve when the level is reached.

IMPROVED FEATHERING PADDLE WHEEL.

Peter Gregerson, Wauzeka, Wis., assignor to himself and Phillip Miller, same place.—The paddles are hung by pivots above their centers, and are held to their work by stops. The latter are controlled by sliding rods which, acted upon by a cam on the wheel shaft, push said stops beyond the outer edge of the paddles, and then retract them by springs. There are other devices which allow the cam to shift right or left, as the wheel is turned in either direction, and an ingenious mechanism is provided for purposes of adjustment.

IMPROVED GATE.

Robert Samuel Rinker, Mount Jackson, Va.—The object of this invention is to provide an improved automatic or self-opening gate; and it consists in an arrangement of elbow levers and catch hooks, controlled by a cord or wire, with a weighted lever, upon one end of which lever the wheels of the vehicle pass to raise the weight and set the gate, so that it can be readily opened from either side by the person in the vehicle by pulling a tripping cord, arranged upon both sides of the gate, within convenient reach, upon a post, each vehicle serving to raise the weight and set the gate for the next succeeding one.

IMPROVED BRICK KILN.

Holland B. Evans and Earnest G. Kemper, St. Charles, Mo.—The invention relates to a new construction and arrangement of the several compartments of the kiln and their flues, which cannot be made plain without the aid of drawings. In general the flues are so made that their heat can easily be controlled, and by using the invention it appears that as many more bricks as are contained in the compartments can be burned with the same or less amount of fuel than with a kiln of the same dimensions constructed in the old way

NEW WOODWORKING AND HOUSE AND CARRIAGE BUILDING INVENTIONS.

IMPROVED RECORDING AND SIGNAL FARE BOX.

Edward Henry Schnell, South Norwalk, Conn.—Another machine for enforcing honesty in car conductors is a recording and alarm fare box, in which the record is made by punctures or slits formed in a piece of paper at the same time that the signal is sounded. There is also a separate compartment in the case of the instrument for depositing tickets as they are collected by the conductor, with a door which only opens when the signal and recording devices are actuated. So that in order that the tickets shall agree with the record the conductor is obliged to collect and deposit all the tickets.

IMPROVED BARREL.

Leslie E. Sunderland, Williamsburg, Va.—The object of this invention is to provide a barrel for the shipment of produce, which shall be capable of transformation after the said produce is delivered, so as to occupy a comparatively small space, and be returned to the sender at the rates of solid freight and at a comparatively trifling cost. It consists in a series of staves, connected by hoops which have peculiar fastenings, which adapt the staves to be disposed flat for return transportation, or rolled up and fastened to form a barrel. The sides of the barrel are straight, and the heads are held in place by lugs alternating, when the barrel is set up upon opposite sides of the head. The heads are thus of less diameter than the inside of the barrel, so that the barrel, when returned, may be packed full of heads, and the rest of the barrel sides packed flatly together.

© 1875 SCIENTIFIC AMERICAN, INC.

Business and Personal.

The Charge for Insertion under this head is One Dollar a Line. If the Notices exceed Four Lines, One Dollar and a Half per Line will be charged.

"Wrinkles and Recipes" is the best practical Handbook for Mechanics and Engineers. Hundreds of valuable trade suggestions, prepared expressly by celebrated experts and by correspondents of the "Scientific American." 250 pages. Elegantly bound and illustrated. A splendid Christmas gift for workmen and apprentices. Mailed. post paid, for $1.50. Address H. N. Munn, Publisher, P. O. Box 773, New York city.

All Split-Pulleys weighing over 50 Pounds at the same finished price as Whole-Pulleys. J. Yocom's Foundries, Drnker St., below 147 N. 2d St., Philadelphia, Pa.

Valuable Patent for Sale. Address Box 124, Manchester, N. H.

For Sale—State and County Rights for an excellent Patent Wash Boiler. Address, for further information, F. G. Mackll, Richmond, Fort Bend Co., Texas.

Hearing Restored—A great invention by one who was deaf for 20 years. Send stamp for particulars to Jno. Garmore, Lock-box 80, Madison, Ind.

H. A.—The Brayton Gas Engine, made by Ready Motor Co., 24 Cliff St., N.Y., will probably answer your purpose.

A Valuable Patent for Sale, Territory U. S.—Address Charles E. Canan, Richwood, Union co., Ohio, P. O. Box 406.

Designing Belt Gearing. By E. J. C. Welch. 12mo, 16 pp., price 20 cents. Send stamp for Catalogue of Scientific Books. E. & F. N. Spon, 446 Broome St., N.Y.

"Geo. P. Rowell & Co. are the largest advertising agents in the world."—Journal and Recorder, West Merden, Conn. "The success of this firm is truly wonderful, and yet not so, either, when we take into consideration their honorable manner of transacting business. We truly wish that all of our foreign advertising might come through them, as it would be a saving to the advertiser and advantageous to ourselves."—Journal, Adams, N.Y.

Notice—Advertisement of Special Sale of Westcott's Patent Chuck. R. E. State, Springfield, Ohio.

See ½ of valuable tobacco patent for sale, in our advertising columns,

The attention of those interested is called to the Varnishes of the London Manufacturing Co. For durability and finish, they are unequaled. 246 Grand Street, New York.

Sewing Machine Patent for Sale—Will either receive proposals for making on Royalty, or a partner with Capital to place it on the market. Address George W. Hoffman, Fielding Station, DeKalb Co., Ill.

Amateurs and Artizans, see advertisement, page 413. Fleetwood Scroll Saw, Trump Bro's, Manufacturers, Wilmington, Del.

We want a Die Sinker, one experienced in Drop Forging. Steady work and good pay. The Hull & Belden Company, Danbury, Conn.

For Sale—2d hand Portable Engines, thoroughly repaired, 4 H.P., $300; 8 H.P., $350; 10 H.P., $400; 15 H.P., $450; 18 H.P., $750; and bran new 5 H.P., $375. Shearman & Hilles, 45 Cortlandt St., New York

For a Self-Acting Trap, to rid out all Rat and Animal Creation, address John Dildine, Limestoneville, Montour Co., Pa.

Wanted—The best Pill Machine. Send full particulars to F. C. Tucker, 384 W. 32d St., New York.

Hotchkiss Air Spring Forge Hammer, best in the market. Prices low. D. Frisbie & Co., New Haven, Ct.

A Bargain—A set of Scientific American, from Vol. 3, Old Series, to Vol. 21, New Series—1847 to 1869—33 Vols., well bound, for $80. Address A.F.R., Box 773, N.Y.

Williamson's Tannate of Soda removes and prevents Scale in Boilers. 25 lb. boxes, 25 cents per pound, C. O. D. D. D. Williamson, 268 West St., New York.

Water, Gas and Steam Goods—Send eight stamps or Catalogue, containing over 400 illustrations, to Bailey, Farrell & Co., Pittsburgh, Pa.

For automatic Twist Drill Grinding Machines, address C. Van Haagen & Co., Philadelphia, Pa.

Hand Fire Engines, Lift and Force Pumps for fire and all other purposes. Address Rumsey & Co., Seneca Falls, N. Y., U. S. A.

Electric Burglar Alarms and Private House Annunciators; Call, Servants' & Stable Bells; Cheap Teleg. Insts; Batteries of all kinds. G.W.Stockly, Cleveland, O

Single, Double, and Triple Tenoning Machines of superior construction. Martin Buck, Lebanon, N.H.

Gothic Furnace, for coal and wood, heats houses & churches. Send for book. A.M.Lesley, 226 W. 23d st., N.Y.

For best Presses, Dies, and Fruit Can Tools, Bliss & Williams, cor. of Plymouth and Jay, Brooklyn, N. Y.

For Solid Wrought-iron Beams, etc., see advertisement. Address Union Iron Mills, Pittsburgh, Pa., for lithograph &c.

Hotchkiss & Ball, Meriden, Conn., Foundrymen and workers of sheet metal. Fine Gray Iron Castings to order. Job work solicited.

For Sale—Second Hand Wood Working Machinery. D. J. Lattimore, 31st & Chestnut St., Phila., Pa.

Price only $3.50.—The Tom Thumb Electric Telegraph. A compact working Telegraph Apparatus, for sending messages, making magnets, the electric light, giving alarms, and various other purposes. Can be put in operation by any lad. Includes battery, key, and wires. Neatly packed and sent to all parts of the world on receipt of price. F.C.Beach & Co., 246 Canal St., New York.

Peck's Patent Drop Press. Still the best in use Address Milo Peck, New Haven, Conn.

All Fruit-can Tools, Ferracute W'ks, Bridgeton, N.J.

American Metaline Co., 61 Warren St., N.Y. City.

Genuine Concord Axles—Brown, Fisherville, N.H.

For Solid Emery Wheels and Machinery, send to the Union Stone Co., Boston, Mass., for circular.

Faught's Patent Round Braided Belting—The Best thing out—Manufactured only by C. W. Arny, 148 North 3d St., Philadelphia, Pa. Send for Circular.

For best Bolt Cutter, at greatly reduced prices, address H. B. Brown & Co., New Haven Conn.

Diamond Tools—J. Dickinson, 64 Nassau St., N.Y.

Magic Lanterns and Stereopticons of all sizes and prices. Views illustrating every subject for Parlor Amusement and Public Exhibitions. Pays well on small investments. 72 Page Catalogue free. McAllister, 49 Nassau St., New York.

Temples and Oilcans. Draper, Hopedale, Mass.

The "Scientific American" Office, New York, is fitted with the Miniature Electric Telegraph. By touching little buttons on the desks of the managers, signals are sent to persons in the various departments of the establishment. Cheap and effective. Splendid for shops, offices, dwellings. Works for any distance. Price $6, withgood Battery. F. C. Beach & Co., 246 Canal St., New York, Makers. Send for free illustrated Catalogue.

Hydraulic Presses and Jacks, new and second hand. Lathes and Machinery for Polishing and Buffing Metals. E. Lyon, 470 Grand Street, New York.

Spinning Rings of a Superior Quality—Whitinsville Spinning Ring Co., Whitinsville, Mass.

Solid Emery Vulcanite Wheels—The Original Solid Emery Wheel—other kinds imitations and inferior. Caution—Our name is stamped in full on all our best Standard Belting, Packing, and Hose. Buy that only. The best is the cheapest. New York Belting and Packing Company, 37 and 38 Park Row, New York.

The Baxter Engine—A 48 Page Pamphlet, containing detail drawings of all parts and full particulars, now ready, and will be mailed gratis. W. D. Russell, 18 Park Place, New York.

Notes & Queries

H. M. D. will find directions for making a fireproof artificial stone on p. 113, vol. 24.—M. H. can fasten emery to wood by the method for emery and iron, described on p. 363, vol. 33.—H. J. will find directions for making nitro-glycerin, dualin, dynamite, etc., on p. 212, vol. 33.—H. F. S. can brown his gun barrels by using the recipe given on p. 11, vol. 32.—F. F. will find a recipe for stove blacking on p. 57, vol. 25.—T. should French polish his pianoforte work. See p. 11, vol. 22.—M. H. K. will find a recipe for white fusible metal on p. 374, vol. 32. The process of repairing desilvered mirrors is described on p. 346, vol. 25.—S. N. will find directions for staining glass on p. 390, vol. 30; for etching glass, on p. 379, vol. 33.—H. A. S. will find directions for making clarified cider on p. 204, vol. 33; for preserving cider, on p. 139, vol. 33.—S. & B. will find on p. 139, vol. 32, directions for making paste that will probably answer their purpose. As to State laws regulating the sale of patents, see p. 187, vol. 33.—S. T. S. can mold rubber by following the directions on p. 283, vol. 29.—W. T. can clean shells by the method described on p. 122, vol. 27.—H. D. M. will find a recipe for Babbitt metal on p. 26, vol. 33.—C. B. will find directions for silvering glass on p. 340, vol. 33. Full directions for nickel plating have frequently been published in these columns. See pp. 155, 235, vol. 33. This also answers E. J. C.—R. R. M. can make a mold, for use on type, of plaster of Paris. The metal that is lightest in water is the lightest out of water.—B. H. C. will find full directions for putting a white enamel on iron on p. 362, vol. 32. This also answers A. F.—C. S. F. will find an account of the oleomargarin process on p. 23, vol. 32.—P. D. R. can fasten rubber to iron by the method given on p. 42, vol. 26, for leather. A good recipe for paste that will keep is published on p. 219, vol. 30.—D. G. F. will find a description of the phosphorus lamp on p. 10, vol. 27.—V. can read the inscriptions on coins by following the directions on p. 246, vol. 26.—H. G. W. will find directions for making spongy platinum on p. 330, vol. 25.—H. N. M. can cement glass to brass by the method described on p. 1, vol. 33.

(1) N. S. asks: How can I unite the mercury in a thermometer which has become separated by agitation? A. Fasten a string 3 or 4 feet long to the instrument, and swing it round your head. The centrifugal force will cause the mercury to unite.

(2) R. F. L. asks: How can I stick leather on the face of iron and wood pulleys? A. Glue the leather to the wooden pulley. Paint the iron pulley with a good coat of white lead in oil, and let it dry; then glue the leather on.

(3) L. B. asks: What is black rosin, and is it known by any other name? A. Black rosin is also called colophony, and is the residue left after the distillation of turpentine.

(4) H. L. M. asks: How can I get a white metal that will flow perfectly into an iron or brass mold, and which, when turned out, will stay bright? A. Melt together 4¼ lbs. of tin, ½ lb. bismuth, ½ lb. antimony, and ½ lb. lead. This alloy fuses at a low temperature and does not tarnish.

Can the color be taken out of horsehair, so as to make it white? A. Wash in weak lye, and fumigate with the vapor of burning sulphur (sulphurous acid).

(5) G. G. B. asks: What do pattern makers use to blacken their patterns with? A. Lamp black mixed with copal varnish and alcohol.

(6) J. N. J. asks: Why do iron and steel weld with less heat with than without borax? A. The use of borax is as a flux, to make the steel heat evenly, and to prevent the corners or edges from burning before the rest of the metal is of the proper heat.

(7) M. D. F. asks: How can chilled iron be drilled? A. By hardening the drill in mercury instead of water.

(8) C. R. asks: What pressure per square inch is required to crush pieces of ice together so as to form one clear homogeneous mass? A. Consult Professor Tyndall on "Forms of Water."

(9) J. H. asks: In what quantity, and at what intervals, should quinine be taken as a remedy for chills and fever? A. In many cases two grain doses are recommended to be taken before each meal, whenever an attack of chills is anticipated.

(10) E. C. & Co. ask: Would it be beneficial to soft maple lumber, for building a large friction pulley, to boil it in olive oil? A. Yes. 2. Would it harden the timber, and make it less liable to split? A. Yes. 3. Would the gear slip more after such treatment? A. Yes.

(11) H. A. S. asks: How is bromide of camphor made? A. Triturate the camphor first with a drop or two of dilute spirits of wine, and then digest with bromine water. The bromine unites with the camphor to form an unstable bromide of camphor, which is crystalline, and is decomposed by heat, by contact with air, and by action of ammonia.

(12) D. C. G. asks: Is there any preparation of phosphorus, either fluid or dry, that is luminous in the dark when hermetically sealed? A. A full description of the phosphorus lamp will be found on p. 299, vol. 33. It consists of a strong solution of phosphorus in olive oil. The solution is kept in a small, glass, stoppered bottle, and when required for use the cork is removed and the solution agitated.

(13) W. J. H. asks: What would be the difference between suspending a weight (that works such machinery as clockwork) direct, and hanging the same weight around a pulley attached to weight? Would there be any difference in effect upon the train of wheels, providing the amount of pressure on drum (not the weights) were same in both cases? A. Neglecting friction and rigidity of cordage, if the weight required in the second arrangement were 100 lbs., that in the first need only be 50 lbs.

(14) T. D. W. If two persons are in a top wagon, about 500 lbs. weight rests upon the two axles, which are as stiff as they are usually made. Now if the axles can be made 2½ times as stiff, how many lbs. will the change take away from the load drawn by the horse? A. The question is rather indefinite, but we do not imagine that there would be much difference in the two cases.

(15) C. P. asks: How many lbs. strain will there be on a rope which has a horse at each end, pulling in opposite directions, supposing each horse to be pulling 1,000 lbs.? A. One thousand lbs. This question is anything but new. See p. 186, vol. 24.

(16) M. B. asks: Is centrifugal force of a wheel in motion a radial or a tangential one? A. Radial, as we understand your question, that is, in the direction of a radius.

(17) J. G. says, in answer to N. K. B.'s query as to the area of a polygon: If A be the area of the circle and P the perimeter of the regular polygon, the area of the latter is

$$\frac{P}{2}\sqrt{\frac{A}{3{\cdot}1416}-\frac{P^4}{4n^2}}$$

n being the number of sides which must be given. If these be given, A and P, as before, and B, the area of the regular polygon, the

$$\text{number of sides}=\frac{P}{2\sqrt{\frac{A}{3{\cdot}1416}-\frac{4B^2}{P^2}}}$$

(18) S. says, in reply to W. J. E., who is troubled with dreams: If you abstain from sleeping on your back you will not dream. It is very rare that a person who is not laying on his back dreams.

(19) L. C. Jr. says, in reply to H. J. E., who asked how to apply wax to stove patterns: As the stove plates of to-day are more or less ornamented with designs, having well defined depressions or elevations, the casting must be heated till it is hot enough to melt the beeswax and not burn it. Then apply the wax by rubbing it here and there over the surface of the plate; a small quantity only is required. After which, and while the wax is in a liquid form, give the casting a thorough brushing with a new shoe brush; this will spread the wax uniformly over the entire surface and at the same time remove all the surplus wax. Then allow the casting to cool, and, with a second shoe brush, give it a thorough brushing, and you will have a surface to your pattern that will give you a mold with as sharp corners as your pattern.

(20) W. J. R. says, in answer to T. D.'s inquiries as to compound gears: I judge from T.D.'s list of gears and pitch of lead screw that he has got a Pratt & Whitney lathe, which, unlike most other lathes, has, on the inside gear on the stud, double the number of teeth that the cone gear has. Therefore, with gears on stud and screws having the same number, the revolutions of cone and screw will be as 2 to 1, and the pitch of lead screw is made practically 16 instead of 8. The SCIENTIFIC AMERICAN'S rule will work by counting the screw as 16. The following index is useful for T. D.'s lathe:

Thread.	Stud.	Screw.	Thread.	Stud.	Screw.
2	Cannot be cut with		4	112	28
3			5	"	35
	the list of gears.		6	"	42
			7	"	49
8	"	56	9	"	63
10	"	70	11	"	77
12	"	84	13	"	91
14	"	98	15	"	105
16	"	112	18	56	68
20	56	70	22	56	84
24	56	77	28	56	98
32	56	112	36	28	63
40	28	70	44	28	77
48	28	84	52	28	91
56	28	98	60	28	105
64	28	112			

COMMUNICATIONS RECEIVED.

The Editor of the SCIENTIFIC AMERICAN acknowledges, with much pleasure, the receipt of original papers and contributions upon the following subjects:

On Screw Cutting Gears. By R. H. B.
On the New Force. By H. M. P.
On Solar Heat. By W. L. S.
On the Contraction Policy. By F. A. L.
On Reissues of Patents. By G. E. B.
On the Hydro-Pneumatic Puzzle. By M. P., by C. M., and by N. B. J.
On Spiritualism. By E. P. M., and by F. G. F.
On the Orbit of the Sun. By J. S.
On Making Rifles. By B.
On Poisons. By H. S. W.
On Carbonic Acid Gas. By C. W. S.
On Oceanic Currents. By T. L.
On Electric Whistles. By L. S. W.
On Chemical Action. By E. V.
On a Dioptric Light. By C. G., and by W. C. G.

Also inquiries and answers from the following:

I.—G. W. P., Jr.—T. B.—J. M.—A. J. B.—A. C.—G. E. C. S.—S. H.—S. R. H.—C. S. D.—S. E. H.—F. S. B—A. R.—H. A.—J. G. S.—C. A. P.—C L.—A. C. R.—J. A. W.—E. E. E.—R. B.—J. Q. R. B.

HINTS TO CORRESPONDENTS.

Correspondents whose inquiries fail to appear should repeat them. If not then published, they may conclude that, for good reasons, the Editor declines them. The address of the writer should always be given.

Enquiries relating to patents, or to the patentability of inventions, assignments, etc., will not be published here. All such questions, when initials only are given, are thrown into the waste basket, as it would fill half of our paper to print them all; but we generally take pleasure in answering briefly by mail, if the writer's address is given.

Hundreds of inquiries analogous to the following are sent: "Who sells alligator leather? Who makes an engine run by burning crude oil in the cylinder? Who makes the best gas meter? Whose is the best process for preserving shingles? Who sells *papier mache* cornices and centerpieces for ceilings? Who makes reflecting drawing boards and other drawing apparatus? Who sells phosphor-bronze? Who sells haircloth for pressing cider?" All such personal inquiries are printed, as will be observed, in the column of "Business and Personal," which is specially set apart for that purpose, subject to the charge mentioned at the head of that column. Almost any desired information can in this way be expeditiously obtained.

[OFFICIAL.]

INDEX OF INVENTIONS

FOR WHICH

Letters Patent of the United States were Granted in the Week Ending

November 16, 1875.

AND EACH BEARING THAT DATE.

[Those marked (r) are reissued patents.]

Alarm, door, Spoor & Searle	170,408
Alarm etc., low water, T. Hass	170,261
Amalgamator, Bancroft & walker	170,329
Ashes, sifting coal, J. Waldron	170,317
Auger handle, J. Swan	170,413
Bagasse, saturator for, A. W. J. Mason	170,180
Bale band stretcher, J. Z. Stocker	170,411
Barrel, Flye & Watson	170,162
Bed stone, oscillating, E. Armitage	170,325
Bedstead, sofa, W. R. Hamilton	170,258
Bedstead, sofa, J. Schoen	170,403
Bee hive, O. Colvin	170,237
Billet loop, K. W. Holmes	170,264
Billiard table, A. Hand	170,169
Binder, temporary, C. D. Lindsey	170,282
Binder, temporary, H. B. Stephenson	170,202
Boiler steam, R. Dempster	170,348
Boiler injector, W. Randall	170,299
Boiler superheater, T. Vernon	170,316
Bolts, etc., making, J. R. Blakeslee	170,151
Boot, T. R. Evans	170,359
Boot tip, Merrill & Hoitt (r)	6,762
Boot, wooden soled, M. J. S. Falcon	170,161
Boot burnisher, etc., A. C. & T. T. Esworthy	170,358
Box lid fastening, J. L. Stevens	170,410
Brush handles, forming, W. Wendell	170,320
Buffer stem, P. W. Pratt	170,190
Building block, B. A. Berryman	170,331
Burner, gas, A. M. Silber	170,407
Butcher's saw, W. Millspaugh	170,181
Butter package, A. J. Dibble	170,242
Cable etc., electric, G. W. F. Hoogeveen	170,266
Camera obscura, T. A. Kellett	170,271
Car axle box, L. Brauer	170,338
Car brake, P. Klunzinger	170,379
Car brake shoe, H. Stenz	170,409
Car coupling, Brinkerhoff, Bennett, & Selder	170,226
Car coupling, A. Brown	170,227
Car coupling, D. Harper	170,259
Car heater, safety, C. A. West	170,321
Car lifter, railroad, J. D. Imboden	170,374
Car platform, E. Tilp	170,415
Car seats, lock for, E. S. Scofield	170,193
Car starter, A. Dahler	170,347
Car starter, G. S. Knapp	170,175
Cars, wind wheel, A. W. Woodward	170,215
Cars, ventilating, E. E. Hargreaves	170,364
Carboy, A. H. Fatzinger	170,246
Carbureter, feed, etc., J. Austin	6,754
Card, playing, R. R. Landis	170,381
Carpet rag looper, W. H. H. Wyckoff	170,323
Carriage curtain, H. C. Moody	170,291
Carriage top, shifting, Gillespie & True	170,361
Caster, furniture, L. F. Cerf	170,156
Chair, reclining rocking, J. R. Newman	170,293
Chairs, bellows for rocking, E. E. Sells	170,308
Chandelier, F. S. Shirley	170,194
Cheese preservers, J. Q. Black	170,222, 170,223
Chisel, submarine rock, A. J. Whitney	170,425
Chronometer, solar, M. Wheeler	170,423
Cigar mold, J. Charter (r)	6,758
Clamp for stamp stems, tappet, N. J. Colman	170,226
Clock, geographical, S, J. Wallace	170,212
Clothes clamps, etc., slotting, M. Pratt	170,394
Clothes dryer, F. M. Clark	170,235
Clothes dryer, G. W. Green	170,253
Coffee huller, D. Lombard	170,283
Composition for beverage, W. A. Martin	170,286
Cooker, steam, G. H. Scribner	170,404
Cooking apparatus, H. M. Smith	170,199
Corn marker, J. McGregor	170,287
Corpses, head rest for, C. D. Blachford	170,224
Cow milker, W. H. Pearson	170,187
Cracker machine, C. S. Fowler	170,250
Cradle, W. V. & N. W. Van Dervort	170,418
Crane, R. B. Robison	170,301
Crosshead, J. W. Hill	170,370
Cultivator, Price & Hunt	170,395
Curd cutter, A. & E. H. Sedgwick	170,404
Curry comb, C. E. L. Holmes	170,265
Curtain fixture, E. B. Lake	170,277
Curtain fixture, G. W. Peirce	170,298
Curtain roller, Taylor & Donahue	170,205
Dental engine attachment, Buckingham *et al.*	170,342
Dental polishing tool, L. F. Locke	170,178

© 1875 SCIENTIFIC AMERICAN, INC.

Detergent, J. W. Munger 170,183
Digger, potato. W. P. Martyn..... 170,387
Door pull, sliding, H. H. Elwell..... 170,357
Drill, coal shelling, P. G. Donohue..... 170,350
Drill. mining, J. S. Fleming..... 170,249
Dyeing fabrics, A. Schultz..... 170,307
Earthenware, bailed, B. F. Roberts..... 170,192
Elevator, B. T. Babbitt..... 170,827
Engine frame, steam, W. S. Finney..... 170,248
Engine, rotary, W. Haven..... 170,365
Engine bucket, rotary, B. T. Babbitt..... 170,128
Engines, valve box for, H. W. Adams..... 170,149
Envelope opener, La Blanc & St. Pierre..... 170,276
Equalizer, draft, H. Cartwright..... 170,232
Eraser, etc., protector, L. L. Tower (r).....6,766 6,767
Fabrics for skirts, etc., A. Komp 170,380
Fare register, Watson & Knowlton..... 170,318
Fence, J. D. & F. Hyberger 170,269
Fence, iron, R. Rogers..... 170,302
Fences putting barbs on wire, W. Dulin 170,354
Files and steel, testing, J. Garland 170,166
Filter and funnel. druggist's, A. E. Garrison..... 170,167
Fire escape, T. Jingras 170,270
Fire escape, J. E. Lindlau..... 170,281
Fire kindler, C. F. Cushing..... 170,158
Fire lighter, G. Elberg..... 170,356
Fishing rod case, C. Perry..... 170,188
Flower stand, portable, D. M. Reynolds..... 170,399
Fruit jar, E. S. Hunt 170,172
Furnace door, puddling, J. Boyland..... 170,225
Furnace, hydrocarbon, H. M. Smith 170,198
Furnaces, feeding air to, W. C. Ford. 170,165
Furnaces, superheating air for, W. C. Ford..... 170,163
Furnaces, retort for, H. M. Smith..... 170,197
Furnaces, heated air to, W. C. Ford..... 170,164
Furniture caster, L. F. Cerf..... 170,156
Game board, J. G. Thurber, Jr..... 170,429
Gas conduits, naphtheline from, J. C. Tiffany..... 170,414
Gas lighter electric, O. A. A. Boillion 170,303
Gas lighting, electric, E. E. Bean..... 170,221
Generator, steam, H. M. Smith..... 170,196
Glass, annealing, J. M. Brookfield..... 170,339
Glassware, making, T. B. Atterbury..... 170,218
Grain drill. J. C. Daman 170,241
Grate, J. Schroeffel, Jr..... 170,206
Halter fastening, J. Thornton 170,207
Hame, G. J. Letchworth..... 170,177
Hames, J. Thornton 170,208, 170,209
Hame top, E. G. Latta..... 170,176
Harness tug, B. S. Leonard..... 170,382
Harvesters, J. O. Brown..... 170,228, 170,229
Harvester, L. J. McCormick..... 170,388
Harvester, corn, Townsend and Parr 170,315
Harvester carriage attachment, J. O. Brown..... 170,230
Harvesting machine, J. O. Brown..... 170,231
Hay loader, Perry and Manley..... 170,189
Heating drum. T. B. Field..... 170,247
Hinge, F. Toedt 170,314
Hogshead and barrel horse, J. N. Parker 170,186
Horse detacher, D. E. Owen..... 170,389
Horse power, G. W. Gordon..... 170,252
Horse power, A. D. Manley..... 170,386
Horseshoe, A. Dunbar..... 170,245
Horseshoe-calking vise, W. Weaver..... 170,319
Hose coupling, W. A. Caswell..... 170,155
Hose, lining hydraulic, J. U. Braman..... 170,153
Hose pipe nozzle, S. Reid 170,397
Hydrant, J. O. Connor..... 170,238
Indicator, speed, M. A. Wier..... 170,213
Iron into steel, cast, C. L. Jeffords..... 170,173
Iron, refining cast, A. Warner..... 170,420
Jack, hydraulic, M. J. Walsh..... 170,419
Kiln, brick, H. W. Adams, Jr 170,148
Kiln, brick, W. N. Weidner..... 170,421
Kitchen utensil, T. S. Page..... 170,295
Lamp chimneys, finishing, J. Lowery..... 170,283
Lamps, manufacture of, T. B. Atterbury..... 170,219
Lamps, wick raiser for, A. Albertson..... 170,428
Latch, locking, J. Drucklieb..... 170,353
Latch, reversible, H. S. Pomeroy..... 170,393
Leather, vat for tanning, O. W. Bean..... 170,330
Lightning rod, I. Johnson..... 170,377
Limb receiver, H. R. Allen..... 170,217
Loom shuttle, etc., J. Wolfenden..... 170,214
Loom weft stop, Isherwood and Nuttall (r) ... 6,761
Lounges, attaching frames to, W. Seng..... 170,406
Lubricators, C. H. Parshall 170,296, 170,297
Macaroons, preserve for. Heide and Wirtz..... 170,368
Mail bag fastening, H. M. Smith..... 170,195
Mattress, wire, A. Z. Boda..... 170,334
Mattresses, frame for wire, W. J. Boda..... 170,333
Measure, graduated, Young and Davis..... 170,216
Meat mangle, C. C. Kerr..... 170,378
Mechanical movement, E. Leslie..... 170,280
Mill, I. A. Hedges..... 170,367
Mill and press, cider, H. Krumsick..... 170,275
Mills, concentrating tailings from, F. E. Mills. 170,289
Millstones, bearing for, C. Custer..... 170,346
Mitten, A. P. Smith (r)..... 6,764
Motion, converting, M. Crossman..... 170,427
Motor, volute spring, W. S. Shoemaker..... 170,310
Music sheet, electric, W. F. and H. Schmoel, Jr. 170,402
Needle threader, P. E. Lambert..... 170,278
Ore, classifying, R. M. Wengler..... 170,422
Paper collar, E. F. Bradford..... 170,336
Paper fastener, Pack and Vanhorn..... 170,294
Paper, perforating, W. Braidwood..... 170,337
Paper weight, E. Dressler..... 170,243
Parchment, vegetable, A. G. Fell 170,360
Peat cutter, Newton and Zollner..... 170,184
Photographic background. Taber and Boyd .. 170,204
Photometer, P. Munzinger..... 170,292
Picture frame clamp, etc., C. P. Poinier..... 170,392
Pills, coating, A. F. W. and W. F. A. Neynaber. 170,185
Pipe, blow, C. Rumley..... 170,304
Pipe joint, J. Hyde..... 170,373
Pipe trap, waste, T. Hudson..... 170,268
Pipe, water, W. H. Sampson 170,305
Planing machine, hand, Doane and Passel..... 170,349
Planter, corn, J. B. Abbott..... 170,147
Planter, corn and seed, H. P. Sullivan..... 170,412
Planter, corn, G. W. Brown (r) ...6,755, 6,756, 6,757
Plow, gang, F. A. Hill 170,262
Plows, furrow gage for, B. B. Hawes..... 170,256
Press, power, B. G. Martin..... 170,179
Printing press, J. L. Firm (r)..... 6,760
Prison doors, operating, R. Richter..... 170,400
Pump, etc., beer, D. S. Whitman..... 170,426
Pump bucket, chain, Van Duzer *et al.* 170,211
Pump, rotary force, A. Carlin..... 170,343
Punch, conductor's alarm, Hill & Ruger..... 170,170
Purifier, middlings, J. F. Gandolfo..... 170,251
Railroad rail chair, J. Gogerty..... 170,168
Railroad rail joint, R. Long..... 170,384
Register, T. B. Doolittle..... 170,351
Regis er, G. F. Spencer..... 170,200
Ruler, parallel, J. D. Hall..... 170,257
Sash balance, H. Cutting..... 170,240
Saw, butcher's, W. Millspaugh..... 170,181
Scaffold, D. C. Place..... 170,391
Scales, weighing, W. W. Reynolds..... 170,191
Scoop, sifting, W. S. Boon..... 170,152
Screw cutting machine, G. Emig..... 170,160
Screw tap, E. Reynolds..... 170,398
Seaming machine, W. C. Sharp..... 170,309
Separating substances, A. B. Stanberrie..... 170,312
Separator, grain, W. W. Johnston..... 170,376
Sewing machine, F. Chase..... 170,345
Sewing machine, J. W. & R. H. Lufkin..... 170,284
Sewing machine, overstitch, W. A. Polmateer..... 170,390
Sewing machine table, H. R. Tracy..... 170,416
Sewing machine tuck marker, A. Johnston..... 170,375
Ship's births, swinging, E. P. S. Andrews..... 170,324
Shirt front, W. J. & M. A. Duke..... 170,244
Shoe and stocking, rubber, J. M. Bibbins..... 170,332
Shutter fastener, S. C. Tuckerman..... 170,210
Shutter worker, H. A. House..... 170,171
Sizing composition, S. B. Dorlan..... 170,352
Skate, E. Murray (r)..... 6,763
Slate-cleaning block, A. H. Bryant..... 170,340
Sofa and table, convertible, C. C. Harris 170,260
Solvents, etc., recovery of vaporized, Whiting *et al.* 170,424
Spike machine, W. Haddock 170,255
Spikes, machine for making split, A. Whittemore. 170,322
Spinning, adjusting spindles, F. A. Sterry (r)..... 6,705
Spirits, P. Griffin..... 170,254
Stage plank and carrier, W. S. Booth..... 170,335
Steam whistle, King & McKiernan 170,274
Steel, manufacturing, F. Berchtold..... 170,150
Stove, cooking, R. Thomss..... 170,206
Syringe, W. Molesworth 170,182
Table, extension, G. Heyl..... 170,369
Table, ironing, J. S. Hays..... 170,366
Tailor's coat measure, J. S. Charch 170,157
Telegraph, facsimile, J. C. Ludwig..... 170,385
Tenoning machine, E. H. Rees..... 170,396
Tide and current wheel, J. J. Heil..... 170,263
Tires, clip for broken, J. W. Hoddinott 170,371
Toilet case and towel roller, D. Miller..... 170,288
Trap, fly, H. B. Earing..... 170,355
Truss, H. A. Kimball..... 170,273
Tubes, bending metallic, J. M. Reid..... 170,300
Tuck marker, R. G. Bush..... 170,154
Tweer, H. J. Chandler..... 170,234
Tweer, P. H. Standish..... 170,313
Type-setting machine, J. Hooker..... 170,372
Type-writing machine, W. H. Case..... 170,233
Type-writing machine, L. S. Crandall..... 170,239
Valve seats, refitting, C. F. Hall..... 170,363
Ventilating churches, etc., W. Kingham..... 170,174
Vise, E. Caswell 170,344
Wagon body, C. A. Dewolf..... 170,159
Wagon brake, A. L. Bartlett..... 170,220
Washing machine, F. Gittere 170,362
Washing machine, J. D. Lawlor..... 170,279
Washing machine, J. I. Shotwell..... 170,311
Watch case spring, A. S. Buckelew 170,341
Water ejector, H. Coil (r)..... 6,759
Water meters, register dial for, J. C. Kelley..... 170,272
Water wheel, S. C. Lyons 170,285
Well curb, C. M. Minor 170,290
Whistle, steam, King & McKiernan..... 170,274
Wind power, J. M. Armour..... 170,326
Windlass, friction, A. D. Stout..... 170,203
Window sash bead fastener, J. W. Tripp..... 170,417
Window shade roller, A. Roelofs..... 170,401
Wood-boring gage, G. S. Hudson..... 170,267
Wrench pipe, D. P. Stanton..... 170,201

DESIGNS PATENTED.

8,799.—WATCH KEYS.—H. W. Bullock, Springfield, Mass.
8,800.—BOXES.—J. H. England, Baltimore, Md.
8,801.—SETTEES.—J. W. Fiske, New York city.
8,802 —SHOW CASE.—W. H. Grove, Philadelphia, Pa.
8,803.—HAT HOLDER, ETC.—J. Hall, Newark, N. J.
8,804.—INKSTANDS.—H. Lee, New York city.
8,805 to 8,807.—FLOOR OIL CLOTHS.—C. T. Meyer *et al.*, Bergen, N. J.
8,808.—PAPER WEIGHTS.—C. Rowland. New York city.
8,809.—COFFIN HINGES.—J. W. Vaughn, Peabody, Mass.
8,810.—OVERSHOES.—G. Watkinson, New Haven, Conn.

SCHEDULE OF PATENT FEES.

On each Caveat..... $10
On each Trade mark..... $25
On filing each application for a Patent (17 years)..... $15
On issuing each original Patent..... $20
On appeal to Examiners-in-Chief..... $10
On appeal to Commissioner of Patents..... $20
On application for Reissue..... $30
On filing a Disclaimer..... $10
On an application for Design (3½ years)..... $10
On application for Design (7 years)..... $15
On application for Design (14 years)..... $30

SCIENCE RECORD For 1876.

SCIENCE RECORD is a splendid book of 600 pages, published annually, about the 15th of January. Illustrated with many engravings. Price $2.50.

THE Volume for 1876 will be published about January 15th. Its contents will embrace the most Interesting Facts and Discoveries in the various Arts and Sciences that have transpired during the preceding year, exhibiting in one view the General Progress of the World in the following Departments:

CHEMISTRY AND METALLURGY,
MECHANICS AND ENGINEERING,
ELECTRICITY, LIGHT, HEAT, SOUND,
TECHNOLOGY, THE USEFUL ARTS,
BOTANY AND HORTICULTURE
AGRICULTURE,
RURAL AND HOUSEHOLD ECONOMY,
MATERIA MEDICA, THERAPEUTICS, HYGIENE,
NATURAL HISTORY AND ZOOLOGY,
METEOROLOGY, TERRESTRIAL PHYSICS,
GEOGRAPHY,
GEOLOGY AND MINERALOGY,
ASTRONOMY,
BIOGRAPHY AND NECROLOGY.

Every person who desires to be well informed concerning the Progress of the Arts and Sciences should have a copy of SCIENCE RECORD for 1876. It will be a most Interesting and Valuable BOOK, and should have a place in every Household and Library.

600 pages Octavo. Handsomely Bound Many Engravings. Price $2.50. Sent, post-paid, on receipt of price.

All the preceding volumes of SCIENCE RECORD may be had separately at $2.50 each, or $10 for the five volumes, 1872, 1873, 1874, 1875, and 1876.

MUNN & CO., PUBLISHERS,
37 Park Row,
New York city

SCIENTIFIC AMERICAN For 1876.

The Most Popular Scientific Paper in the World.

THIRTY-FIRST YEAR.

Only $3.20 a year including Postage.

☞Send 10 cents for Specimen copy

THE SCIENTIFIC AMERICAN, now in its 31st year, enjoys the widest circulation of any weekly newspaper of the kind in the world. A new volume commences January 1, 1876. Published weekly. Now is the time to subscribe and to form clubs.

THE CONTENTS OF THE SCIENTIFIC AMERICAN embrace the latest and most interesting information pertaining to the Industrial, Mechanical, and Scientific progress of the world; Descriptions, with beautiful Engravings, of New Inventions, New Implements, New Processes, and Improved Industries of all kinds; Useful Notes, Recipes, Suggestions and Advice, by Practical Writers, for Workingmen and Employers, in all the various arts.

EVERY NUMBER contains sixteen large quarto pages, elegantly printed and illustrated with many engravings. The year's issue contains 832 large pages, equal to *four thousand book* pages, at a cost, including postage, of only $3.20 a year to the subscriber.

THE SCIENTIFIC AMERICAN will be especially enriched during the current year by splendid engravings and descriptions of the most noticeable objects in the great *Centennial International Exhibition.*

Engineers, Mechanics, Telegraphers, Inventors, Manufacturers, Chemists, Photographers, Physicians, Lawyers, Clergymen, Teachers, and People of all Professions, will find the SCIENTIFIC AMERICAN most useful and valuable. Its pages teem with interesting subjects for thought, study, and conversation, and are an unfailing source of new and instructive information. As an Instructor and Educator, the SCIENTIFIC AMERICAN has no equal. It is promotive of knowledge and progress in every community where it circulates It should have a prominent place in every Household, Reading-Room, and Library.

☞*Specimen copies sent, prepaid, on receipt of 10 cents.*

TERMS OF SUBSCRIPTIONS.---POSTAGE PAID BY US.

One copy Scientific American, one year.... $3.20
One copy Scientific American, six months.. 1.60
One copy Scientific American, three months 1.00
One copy Scientific American, and one copy Scientific American Supplement, both for one year, post-paid... ..... 7.00
One copy Scientific American, one year, and one copy Science Record..... 5.20

☞We make a liberal discount and give advantageous premiums to those who form Clubs or procure Subscriptions. A beautifully illuminated Subscription List, also Prospectus and Rates, *sent free.* Address

MUNN & CO.
37 PARK ROW, NEW YORK.

Munn & Co.'s Patent Offices.

Established 1846.

The Oldest Agency for Soliciting Patents in the United States.

TWENTY-EIGHT YEARS' EXPERIENCE.

MORE PATENTS have been secured through this agency, at home and abroad, than through any other in the world.

They employ as their assistants a corps of the most experienced men as examiners, specification writers, and draftsmen that can be found, many of whom have been selected from the ranks of the Patent Office.

SIXTY THOUSAND inventors have availed themselves of Munn & Co.'s services in examining their inventions, and procuring their patents.

MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine inventions confer with inventors, prepare drawings, specifications, and assignments, attend to filing applications in the Patent Office paying the government fees, and watch each case step by step while pending before the examiner. This is done through their branch office, corner F and 7th Streets, Washington. They also prepare and file caveats, procure design patents, trademarks, and reissues, attend to rejected cases (prepared by the inventor or other attorneys), procure copyrights, attend to interferences give written opinions on matters of infringement, furnish copies of patents: in fact, attend to every branch of patent business both in this and in foreign countries.

Patents obtained in Canada, England, France, Belgium Germany, Russia, Prussia, Spain, Portugal, the British Colonies, and all other countries where patents are granted.

Copies of Patents.

Persons desiring any patent issued from 1836 to November 26, 1867, can be supplied with official copies at a reasonable cost, the price depending upon the extent of drawings and length of specifications.

Any patent issued since November 27, 1867, at which time the Patent Office commenced printing the drawings and specifications, may be had by remitting to this office $1

A copy of the claims of any patent issued since 1836 will be furnished for $1

When ordering copies, please to remit for the same as above, and state name of patentee, title of invention, and date of patent.

A special notice is made in the SCIENTIFIC AMERICAN of all inventions patented through this Agency, with the name and residence of the patentee. Patents are often sold, in part or whole, to persons attracted to the invention by such notice.

A pamphlet of 110 pages, containing the laws and full directions for obtaining United States patents, also a circular pertaining exclusively to Foreign Patents, stating costs in each country, time granted, etc., sent free. Address

MUNN & CO.,
Publishers SCIENTIFIC AMERICAN;
37 Park Row, N. Y.
BRANCH OFFICE—Corner F and 7th Streets, Washington, D. C.

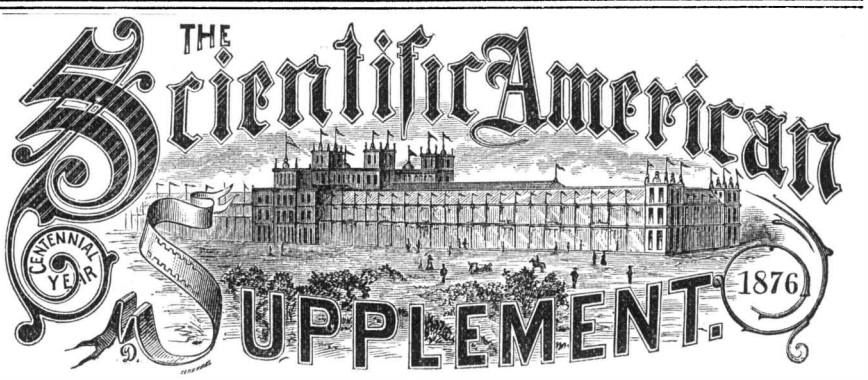

$5 a year by mail, post-paid. Send 10 cents for Specimen Copy.

TO ILLUSTRATE AND DESCRIBE the many interesting themes and objects presented in the GREAT CENTENNIAL INTERNATIONAL EXPOSITION OF 1876, and also to meet the wants of that large class of readers who desire an increased supply of Scientific Information, particularly of the more Technical and Detailed character, we shall issue a SPECIAL PUBLICATION, entitled the SCIENTIFIC AMERICAN SUPPLEMENT, to be printed weekly during the Centennial year of 1876, and, perhaps, permanently thereafter. Each number will have sixteen large quarto pages, issued weekly, printed in the best style, uniform with the SCIENTIFIC AMERICAN, but separately paged.

The SCIENTIFIC AMERICAN SUPPLEMENT, in addition to the special matter pertaining to the International Exposition, will embrace a very wide range of contents, covering the most recent and valuable papers by eminent writers in ALL THE PRINCIPAL DEPARTMENTS OF SCIENCE AND USEFUL KNOWLEDGE, to wit:

1.—Chemistry and Metallurgy.—Embracing New Chemical Discoveries, Improvements, and Processes, with engravings. New Processes of Working Iron, Steel, Lead, Copper, Gold, Silver, and the Various Metals, with engravings of New Apparatus, New Information, etc.

2.—Mechanics and Engineering.—The latest and best papers upon Steam Engineering, Railway Engineering, Mining, and Civil Engineering, Mill Work, Textile Industry, with engravings and working drawings.

3.—Electricity, Light, Heat, Sound.—Latest Improvements in Telegraphy, Telegraph Engineering; Improvements in Galvanic Batteries, Electric Engines, New and Useful applications of Electricity in the Arts, with engravings.

4.—Architecture.—Examples of the best New Structures, with details and drawings.

5.—Technology.—New and Useful Invention and Discoveries relating to THE ARTS; Improvements in Photography, Printing, New Implements, New Machinery, New Processes, New Recipes, Improvements pertaining to Textile Industry, Weaving, Dyeing, Coloring, New Industrial Products, Animal, Vegetable, and Mineral—with engravings.

6.—Agriculture, Botany, and Horticulture.—New and Useful Information in all branches of Agriculture. Descriptions of New Plants, Trees, Shrubs, and Flowers, New, Useful, and Interesting Facts in relation to Cultivation, Propagation—with engravings.

7.—Rural and Household Economy.—The Latest Information concerning Building Materials, New and Valuable Recipes, and a great variety of Miscellaneous Information pertaining to Rural and Household affairs—with engravings.

8.—Materia Medica, Therapeutics, Hygiene.—Exhibiting the progress of Medical Science in various branches; New Medicinal preparations, New Health Appliances, and much Interesting Information.

9.—Natural History and Zoology.—The Latest Investigations, Discoveries, and most Interesting Information in this department of Science.

10 & 11.—Meteorology, Terrestrial Physics, Geography.—Accounts of Interesting Atmospheric and Terrestrial Phenomena, Travels, Explorations and Discoveries, etc.

12.—Geology and Mineralogy.—The Latest and most Interesting Geological Investigations and Reports, and New Discoveries.

13.—Astronomy.—Recent Interesting Discoveries and Information, with Reports of Astronomical Phenomena, Progress, New Instruments, etc.

TERMS:—Scientific American Supplement, One year, post-paid, $5.00; half year, $2.50 three months, $1.25. Three copies, one year, $13.50; five copies, $20.00; ten copies, $38.00. One copy of SCIENTIFIC AMERICAN and one copy of SCIENTIFIC AMERICAN SUPPLEMENT, one year post-paid, $7.00.

Address MUNN & CO., Publishers, 37 Park Row, New York.

© 1875 SCIENTIFIC AMERICAN, INC.

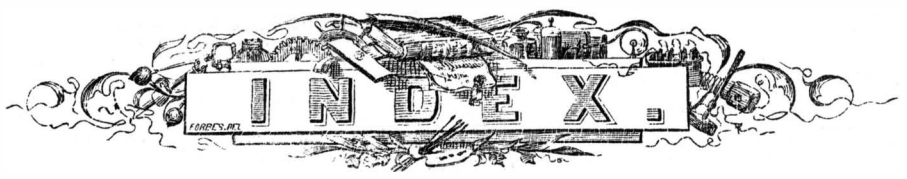

ILLUSTRATIONS.

A

Accumulator ... 280
Acidimetry, Reveil and Salleron's method ... 402
Air reservoir, Galibert's ... 66
Altiscope, Stevens' ... 280
Anchor tripper ... 280
Ant eater, the scaly ... 135
Antelope, the brown Indian ... 343
Aquarium and wardian case, combined ... 103
Arctic boats, tents, and implements ... 130
Arctic sleigh, tools, etc ... 131
Arm, artificial ... 280
Atmospheric machinery ... 248
Augers ... 133
Aurora, an experimental ... 197
Awl, Smith's ... 70
Awnings ... 361
Axe tester ... 351
Axle machinery ... 351
Azaleas, hardy ... 103

B

Baggage checks ... 361
Balance, alloy ... 361
Bale tie, Smith's ... 115
Balista, the ... 323
Ballasting and stone-breaking machine, Marsden's ... 367
Barometrograph ... 361
Battery cells, joining up ... 115
Battery, charcoal, Blair's ... 68
Bearing feeler, Alley's ... 70
Beer cooler, Bohart's ... 150
Bell, the Independence ... 104
Belt tightener and hanger, Squire's ... 150
Blind hinge, Holbrook's ... 355
Blind slat holder, Steller's ... 70
Blind stop, Jones' ... 134
Blowpipe, gas, Cougnet's ... 19
Boiler, rag, Donkin's ... 86
Boiler, small steam, Blunt's ... 239
Boilers, setting ... 339
Boilers, setting, Keyes' method ... 1
Boilers, the heating surface of ... 152
Boiling pot, Hennaman & Shaw's ... 246
Boring bits ... 165
Boring machine, vertical, Furness & Co.'s ... 367
Bow socket, tubular, Topliff's ... 374
Brake, wagon, Howell's ... 310
Brick machine and transporting apparatus, Gard's ... 31
Bridge at St. Louis, Mo.—The western abutment ... 114
Bridge over the Hudson at Troy, N. Y. ... 351
Bridge over the Waitaki, New Zealand ... 211
Bridge, suspension, at Kiev, Russia ... 255
Broom-sewing machine ... 328
Buckles and other fastenings ... 83
Bullets, projectiles, and cartridges ... 24
Burglar alarm, Powell's ... 355
Burner, Bunsen, solid flame ... 258
Burner, non-retreating Bunsen ... 387

C

Caladium culture ... 247
Calipers ... 328
Can-soldering machine ... 328
Cap, reversible, Fox's ... 198
Carbonic acid from roots ... 355
Carbonic acid, liquid, flask for ... 323
Carbonic acid, making liquid ... 243
Carillon machine, Gillett & Bland's ... 210
Car seat, Sheldon's ... 338
Car starter and replacer ... 328
Carving machine, wood, Blackman's ... 95
Car-washing machine, Lord Caithness' ... 51
Centennial agricultural building ... 199
Centennial horticultural building ... 159
Center gages ... 328
Chromatrope, a new ... 344
Chronometer, solar, Fiechet's ... 159
Cigar wrapper knife, Brechbiel's ... 86
Cochliostema Jacobianum ... 167
Cockatoo, the great black ... 295
Coffins, wicker ... 99
Coloring of plants, the artificial ... 311
Color vision, Ricco's experiments on ... 180
Column, metallic, Leidy's ... 246
Compass, circular, Duchemin's ... 147
Conservatory at Hampton Court, England ... 375
Cooking chamber, Smedley's ... 166
Cottage, an ornamental ... 103
Counter and tell-tale, engine ... 258
Cow tail holder, Pedden's ... 355
Crane, an eighty-ton ... 98
Crane, steam, Taylor's ... 287
Culinary apparatus, Randall's ... 358
Cupressus nutkaensis ... 247
Curtain fixture, Pospisil's ... 306

D

Dashboard, Schwaner's ... 22
Deodorizing excavator, Johnson & Nettleton's ... 223
Diving bell and grapnel ... 291

E

Earth pits ... 296
Electrical speed recorder, Grove's ... 182
Electric light, the ... 35
Electric phenomenon, remarkable ... 100
Elevator, grain, and stockyards, New York Central Railway ... 383
Elevator, Körting's ... 82
Elevators, hydraulic, in New York post office ... 178
Elevator, water, Hale's ... 326
Elipsograph, Toulmin's ... 230
Engine, blooming mill, J. E. Thomson steel works ... 18
Engineering structures ... 312
Engine, portable, Clayton & Shuttleworth's ... 162
Engine, steam, Snyder's ... 371
Engraving machine, Lotz' ... 34

F

Feed water heater and purifier, Berryman's ... 127
Feed water heater, locomotive, Magoon's ... 182
Fence, iron, Robertson's ... 387
Ficaria grandiflora, the ... 71
File, Carr and Wilcox' ... 322
Filter, charcoal ... 404
Filter, domestic ... 404
Filter, laboratory ... 404
Filter, reversible ... 404
Finch family, members of the ... 55
Fire bars, revolving, Schmitz' ... 5
Firebox, locomotive, Dawson & Hughes ... 38
Fire engine, floating, Merryweather's ... 162, 163
Flamingo plant, the ... 247
Flanging machine, Hanson's ... 15
Floating apparatus, Lloyd's ... 258
Floodway for warehouses, Morrell's ... 191, 370
Floor clamp, Clarke's ... 102
Floor clamp, Wood's ... 118
Florakin or lesser bustard, the ... 231
Flower pots ... 296
Freezing apparatus, Carré's ... 82
Friction clutch pulley, Bean's ... 274
Friction meter, Napier's ... 227
Fuel economizer, Twibill's ... 63
Furnace, asphaltum ... 328

G

Gages, tide and river ... 227
Galley support, printer's ... 402
Garden, a Buddhist ... 279
Gas from petroleum, making, McClarty's ... 258
Gas regulator, Liebda's ... 259
Gearing, angular ... 280
Governor, Mein's ... 354
Gradients, steep, working by locomotives, Stevenson & Reid's system ... 354
Grapes, preserving ... 306
Grinder, universal, Sanford's ... 179
Gunboat, the Bermejo ... 146
Gun, monster field, Krupp's ... 391
Guns, recoil check for, Miller's ... 406
Gun, the 81-ton, boring the trunnion coil ... 239
Gun, toy, Martin's ... 102

H

Hay rake, horse, Mellinger's ... 6
Health lift, Knight's ... 215
Heater, steam, De Kafer & Lacy's ... 294
Heater, ventilating, Church's ... 262
Hell Gate submarine operations, the ... 111
Horses, protecting, Lawton's method ... 66
Horse yoke, Stratton & Olmsted's ... 50
Hospital for sick children, London ... 274
Hothouses, recently constructed ... 407
Hugues, Edward David ... 151
Hydro-pneumatic puzzle, the ... 351

I

Ice cream carrier, Wyman's ... 306
Ice-making machine, Siddeley & Mackay's ... 242
Iguana, an Australian ... 295
Induction coil, Brush's ... 344
Induction or electrostatic coil, the ... 115
Iris, the great spotted ... 247
Ironclad circular ship, Russian ... 87
Ironclads, English and American ... 359

J

Joint, frictionless, Talbott's ... 69

K

Key holder, Coleman's ... 86
Kite, the crested black ... 231
Knapsacks ... 280
Knebworth House and Gardens, England ... 39

L

Lamp and oil can, Roberts' ... 128
Lathe, duplex wheel, New's ... 15
Lathe, hand and slide, Law and Duff's ... 342
Lever power, Hale's ... 374
Life-saving apparatus, Rogers' ... 194
Light, dioptric, Meigs' ... 355
Lighthouse, the Trinity Shoals ... 391
Liquid mixer, Meyers' ... 207
Liquor thief ... 404
Locomotive, a modern ... 307
Locomotive, Stroudley's ... 271
Locomotive, the first passenger ... 307
Lubricating device, Sawyer's ... 322

M

Macrozamia plumosa, the ... 71
Magnetism, experiments in ... 184
Magnet, Jamin's ... 72
Magneto-electric light machine ... 35
Manatee or cow fish, the ... 263
Medicine, book on, Hermes Trismegistus' ... 376
Melon cucumber, a ... 311
Mesembryanthemum minimum ... 167
Meter, pulsating, Atwill's ... 404
Meter, spirit, Siemens & Halske's ... 404
Meter, spirit, Young's ... 404
Meter, water, Duroy's ... 104
Microscope, a home-made compound ... 275
Milking tubes, Smith's ... 70
Mill, farm, Swift's ... 246
Mills, grinding, Harrison's ... 278
Mines, the Montreal hematite, England ... 338
Molding machine, Grosvenor's ... 166
Mortising and boring machine, Fay's ... 291
Moths, currant and raspberry ... 115
Moth, the cobweb apple ... 135
Motor, colliery ... 101
Motor, high pressure ... 20
Mower, Burgess and Key's ... 119

N

Nail extractor, Converse's ... 150
Napper and brusher, Tompkins' ... 6
Nares, Captain G. S ... 130
New York post office, the ... 175
New York United States Court, the ... 178

O

Onager, the ... 323

P

Pencil, adding, Smith & Potts' ... 214
Petroleum, furnace for burning ... 182
Photographs, printing by machinery ... 136
Pipes, bending, Orum's device for ... 150
Planing machine pressure blocks, Patterson's ... 102
Plants, carnivorous ... 256
Plants, the animalism of ... 7
Plant vases for indoor decoration ... 407
Plate shearing machine ... 390
Podometer, or walking distance indicator ... 98
Polyzoön, a fresh water ... 4
Press, drawing, Stiles & Parker's ... 310
Printing press, Cottrell & Babcock's ... 259
Propeller, new, Becker's ... 322
Propeller, screw, Griffith's ... 386
Propeller, screw, Stevens & Miller's ... 134
Psychomystery, the ... 291
Pulley block, Moore's ... 354
Pump, donkey, Hayward & Co.'s ... 390
Pump, rotary, McFarland's ... 371
Pump, steam jet, Körting's ... 115
Pump, three-cylinder, Haskell's ... 4
Pump and shearing machine, Long & Co.'s ... 143
Pyrometer, Salleron's ... 50

R

Raft, life, Parratt's ... 134
Railroad cars, two-story ... 242
Rails, street, Nessle's ... 19, 55
Railway carriage, Giffard's ... 275
Railway fishplate, etc., Dittman's ... 294
Railway tie, Reese's ... 230
Railway track, Potts' ... 38
Reaper, Burgess & Key's ... 119
Refrigerator and counter, Barnes' ... 278
Refrigerator steamer, proposed ... 322
Rifle contest, the targets ... 40
Riveting machine, hydraulic, Tweddell's ... 47
Rooster, the cataleptic ... 147
Rope socket, Bowen's ... 18

S

Sadiron, Hasenritter's ... 358
Safety valve, mercurial, Coils' ... 198
Sambur at bay, the ... 343
Sawing and grooving machine, Baggs' ... 303
Saw sharpener, Crook's ... 255
Scale, rafter, and bevel gage, Spayth's ... 134
Scissors and ripping knife, Johnson's ... 274
Screw cutting die and holder, Wiley and Russell's ... 390
Shaping machine, double, Fernau & Co's ... 403
Signals and switches, Rousseau's system ... 399, 402
Silk-spinning machinery, Danforth Locomotive Company's ... 406
Skimmia fragrans ... 311
Skimmia japonica ... 311
Sledge for the arctic expedition ... 51
Slide valve calculator, Caldwell's ... 67
Sounding apparatus, deep sea, White's ... 211
Sounding apparatus, Le Coentre's ... 357
Spark spectra, apparatus for, Bunsen's ... 329
Spring, gang plow, Dalton's ... 22
Stamp, rotary hand Baldwin's ... 19
Steam cultivator, Fowler's ... 386
Steel, compressing, hydraulic press for ... 179
Steel ingots, casting, Hackney's method of ... 275
Steel ingots for ordnance, casting ... 290
Steel, molds for casting ... 99
Steel process, the Bessemer.—Emptying a converter ... 290
Strong room, banker's, Hobbs & Co's ... 319
Surveying instrument, Jahn's ... 226
Swans ... 183
Swan's nest, the ... 183

T

Tea kettle, Gray's ... 274
Time check, Osborne & Legrande's ... 306
Tire-upsetting machine, Schon's ... 246
Tools, driving portable, Smith's method of ... 146
Tortoises, land, in the Zoological Gardens, London ... 263
Tunnels, ventilating, Dixon's method ... 79
Tweer, smith's, Seel & Shaw's ... 86

V

Valve, stop, Whitton's ... 147
Valve, test, Wood's ... 214
Ventilation and cleansing drain pipes, Morrell's system ... 335
Villa, a model ... 215
Villa, design for a model ... 23
Vineyard, the Garston, England ... 327
Vise, Penfield's ... 193
Vise, sudden grip, Hall's ... 118

W

Water closet, odorless, Smith's ... 326
Water closet, to put up a ... 57
Water pressure engine, Wyss & Studers' ... 195
Water, salt, changing to fresh ... 214
Water, testing the color of, Bowditch's method ... 57
Water wheel buckets, Wolcott's ... 260
Weatherstrip, Fleury's ... 236
Webb, Captain Matthew ... 227
Well, artesian, at Grenelle, France ... 54
Well-boring implements ... 54
Wheelwright's machine, Buffington & Co.'s ... 406

Y

Yucca strieta, the ... 327

MISCELLANY.

Figures preceded by a *star* (*) refer to illustrated articles.

A

Accumulator ... *280
Adhesion surface ... 320
Æolian harp ... (10) 315
Aero-dynamic wheel ... *248
Æsthetics, the new department of ... 177
Æthrioscope, the ... 219
African explorations, new ... 281
Agates, cutting ... (8) 42
Air, compressed, antiseptic properties of ... 105
Air cushion for pipes ... *248
Air for smelting iron ... (48) 395
Air in houses, etc ... 329
Air reservoir, improved ... * 66
Air, temperature of, and compression of ... (14) 123
Alcohol, deodorizing ... (6) 235
Alizarin, artificial ... 98
Alizarin, artificial, manufacture of ... 161
Aluminum ... 145
Alloy, balance ... *361
Alloy for bearings ... (17) 235
Alloy, the Chinese, pakfong ... 201
Altiscope ... *280
American competition ... 241
American grape vines in France ... 261
American Institute fair, opening of the ... 201
American Institute fair, the ... 70, 209, 233, 241, 256, 273, 337
American inventions in Europe ... 260
American inventions rediscovered in Europe ... 321
Americans, relationships of native ... 224
Ammonia, aqua ... (47) 299
Amusements, outdoor ... 265
Analysis, a human ... 135
Anchor tripper ... *280
Anemometer ... *249
Angle joints ... *280
Aniline black by electricity ... 303
Aniline violet, new ... 182
Ant-eaters, the ... *135
Antelopes, the ... *343
Antiseptic, another new ... 197
Ants, to destroy ... (40) 172
Ants, to exterminate ... (21) 123
Apparitions ... 65
Appreciation ... 201
Aquarium, portable, and wardian case ... *103
Aquometer, the ... 273
Arched roofs ... *312
Arcograph, the ... *280
Arctic expedition, the British ... 130
Arctic explorations, recent ... 295
Arctic explorers, work for ... 92
Arm, artificial ... *280
Arsenic in the air of rooms ... 330
Astronomical notes ... 10, 296, 360
Athletic contests, the university ... 73
Atmosphere and sound ... 216
Atmospheric hammer ... *248
Atmospheric machinery ... *248
Atmospheric whistle ... *248
Atoms, the dimensions of ... (27) 236
Augers ... *133
Aurora, an experimental ... *197
Awl handles ... *361
Awl, improved ... * 70
Awnings ... *361
Axe tester ... *361
Axle gages, etc ... *361
Azaleas, hardy ... *103

B

Babbitt metal ... (13) 26
Bacteria and vibrios ... 185
Bag fasteners ... * 83
Baggage checks ... *361
Bale tie, improved ... *115
Ballasting and stone-breaking machine ... *367
Ballooning at night ... 196
Barometer, a cheap ... (2) 26
Barometer, to make a ... (9) 394
Barometrograph, the ... *361
Baryta green ... 303
Batrachia and reptilia in North America ... 153
Battery, a charcoal ... * 68
Battery, a chloride of silver ... 390
Battery, a simple ... (34) 284
Battery cell, a new form of Leclanché's ... 372
Battery cells, joining up ... *115
Battery, electromotive force of a ... (39) 172
Battery for spark spectra ... *329
Battery, poles in a ... (10) 171
Battery, the Hill ... (16) 298
Bearing feeler ... * 70
Bedbugs, exterminating ... (1) 11
Bee culture ... 89, 180
Beef tea ... 232
Beer cooler ... *150
Beer, drinking ... 406
Bees in the United States ... 225
Bell, repairing the Independence ... *164, 229
Belt couplings ... * 83
Belting, leather, American ... 354
Belting vs. frictional gearing ... 357
Belting vs. gearing ... 375
Belts, death ... 6
Belts, slip of ... 385
Belts, strain on ... 340
Belt tightener and countershaft hanger ... *150
Birds and the insect pests ... 56
Birds, memory in ... 22
Birds' nests, edible ... 201
Bitters, about ... 257
Bicycle riding ... 35
Black for patterns ... (5) 409
Black stain for wood ... (32) 236
Blasting agents, modern ... 39
Blasting of Diamond Reef ... 303
Bleach glue, to ... 24
Bleaching cotton yarn ... 312
Bleaching fluid, instantaneous ... 329
Bleaching gums ... (49) 204
Bleaching shellac ... (4) 171
Bleaching sirup by charcoal ... (1) 26
Blind hinge ... *355
Blind slat holder ... * 70
Blind stop, improved ... *134
Blowers, fan, action of ... (31) 220
Blowpipe, a new gas ... * 19
Boiler, admitting air to steam ... (8) 155
Boiler and feed water heater ... * 63
Boiler, a small steam ... *229
Boiler bolts and castings ... *339
Boiler brickwork ... *339
Boiler explosion ... 135, 185
Boiler explosions, experimental ... 113
Boiler explosions, mysterious ... 86
Boiler furnaces, hot draft for ... * 1
Boiler incrustations ... 105
Boiler inspection, a years' experience in ... 97
Boiler phenomena, steam ... 193, 244 264
Boiler, rag, rotary ... * 86
Boilers ... 264
Boilers, aero-steam ... 249
Boilers, chloride of barium in ... 66
Boilers for burning sawdust ... *339
Boilers, proportion of ... 224
Boilers, setting ... *339
Boilers, tale in ... 376
Boilers, the heating surface of ... *152
Boiling pot, improved ... *246
Bone black ... (2) 33
Bones ... 143
Bones, buffalo ... 277
Boracic acid, fused ... 167
Boracic acid, tempered ... 113
Boring bars ... *181
Boring bars and tools ... 212
Boring bits ... *165
Boring machinery, wood ... *367
Boring tools ... (25) 378
Boring tools for lathe work ... *215
Bow socket, tubular ... *374
Brakemen, a lesson for ... 295
Brake trials, high speed ... 342
Brake wagon ... *310
Brass, flux for ... (1) 298
Brass on pistons ... 392
Brass to resemble gold ... (47) 395
Brass wire for rivets ... 358
Breakwater the Manora ... 409
Breath, analysis of the human ... 311
Brewing beer in New York city ... 308
Bricks, damp-proof ... 357
Bricks, Japanese in America ... 169
Bricks, transporting, during manufacture ... * 31
Bridge at Troy, N. Y ... *351
Bridge between New York and Brooklyn ... 86
Bridge building, a new system of ... 116
Bridge in Philadelphia, burnt ... 372
Bridge over the Waitaki, New Zealand ... *211
Bridges, modern suspension ... *255
Bridge, railway, iron in ... 69
Bridge, the East River ... 309
Bridge, the St. Louis ... *114
British Association notes ... 216
Bromide of camphor ... (11) 409
Bromine ... 384
Bronze, bluish green ... 85
Bronze, brown, for iron ... 185
Bronze on brass, green ... 51
Bronzes, Japanese ... 281
Bronzing cast iron ... (11) 11
Broom heads ... * 83
Broom-sewing machine ... *328
Buckles ... * 83
Buckskin gloves, etc., cleaning ... (33) 347
Buffalo skins, to prepare ... (24) 59
Buildings and railway cars, exit from ... 100
Bullets, projectiles, and cartridges ... * 24
Burglar alarm ... *355
Burglar alarms ... 256
Burial place, pyramidal ... 50
Burial vault, building a ... (25) 316
Burner, Bunsen solid flame ... *258
Burner, improved Bunsen ... *387
Burns, new remedy for ... 56, 133
Business and financiering ... 387
Business, stagnation in ... 4
Butter, Philadelphia, the secrets of ... 72
Buttons, white shirt ... (42) 204

C

Caisson, movable iron ... * 312
Caisson, Triger's ... * 312
Caladium culture ... * 247
Calculation, instinctive ... * 288
Calicoes, washing ... 249
Calipers ... * 328
Calorimeter ... * 328
Canal boats, propelling ... 134
Canal, French irrigation ... 191
Can-soldering machine ... * 328
Capping machine ... 337
Cap, reversible ... * 198
Carbonic acid as a fire extinguisher ... 309
Carbonic acid, flasks for liquid ... * 323
Carbonic acid from roots ... * 355
Carbonic acid gas as a motor ... 166, * 243
Carbonic acid motor, the ... 310
Carbonic oxide, test for ... (2) 394
Car couplings, self-acting ... 387
Carillon machine ... * 210
Carnivorous plants ... * 256
Car seat, auxiliary ... * 338
Car starters, etc ... * 328
Cars, two-story railway ... * 242
Car-washing machine ... * 51
Catarrh, cure for ... (46) 204
Caterpillars, to destroy ... (18) 42
Caterpillars, to exterminate ... 121
Cattle, queer ... 112
Cells, artificial, Traube's ... 161
Celluloid ... 193
Celluloid—what is it? ... 23
Cement, a new ... 39
Cement, aquarium ... (64) 43
Cement, coating, for brickwork ... (14) 26
Cement for emery and leather ... 120
Cement for filling burrstones ... 323
Cement for glass ... 143
Cement for glass letters ... 47
Cement for iron and wood ... 287
Cement for leaky roofs ... 183
Cement for leather ... (67) 300
Cement for leather and iron ... (2) 409
Cement for metals and glass ... 1
Cement for steam pipes ... 185
Cement for teeth ... 225
Cementing emery to iron ... (9) 363
Cementing iron in wood ... 23
Cement, non-drying ... 24
Cement, Portland ... 49
Centennial buildings, iron in the ... 1
Centennial buildings, the ... * 59, * 199
Centennial clergyman, a ... 3
Centennial, machine builders at the ... 194
Centennial, new allotment of space at the ... 207
Centennial notes ... 40, 136, 147, 276
Centennial, progress of the ... 99
Centennial, Russia and the ... 369
Center gage ... * 328
Cereals and their chemical value ... 336
Cesspool, a new ... 337
Chance, taking a ... 48
Chemistry, a lady lecturer on ... 4
Chemistry's gift to the world ... 284
Chemist's narrow escape, an amateur ... 261
Chimneys ... 340
Chimneys, dimensions of ... (22) 11
Chimneys, sooty, cure for ... 21
Chinch bugs, to destroy ... 127
Chloral as an anæsthetic ... 169
Chloral drinking, dangers of ... 65
Chloral hydrate in neuralgia ... 71
Chlorine, preparing ... (7) 26
Chloroform as a preservative ... 180
Chromatrope, a new ... * 344
Chronometer, a solar ... *159, 228
Cider, clarifying ... (48) 204
Cider, purifying ... (58) 139
Cigar wrapper knife ... * 86
Cincinnati exposition, the ... 278
City, a, 180,000 years old ... 64
Clay pipes ... 265
Cleansing cloths and yarns ... 340
Cleansing goods by naphtha ... 344
Clouds, angular velocity of ... 330
Clouds, ascertaining the altitude of ... 164
Clouds as storm signals ... 85
Clouds, thunder, altitude of ... 69
Clover, fecundation of ... (62) 139
Coal, consumption of, per horse power ... 101
Coal field, the Alleghany ... 152
Coal tar colors, practical determination ... 261
Coal, the components of ... 306
Coal, the origin of ... 262
Coal, weight and bulk of ... (27) 11
Cobwebs, utilizing ... 343
Cochliostema Jacobianum ... * 167
Cockatoo, great black ... * 295
Coffee plague in Ceylon ... 119
Coffins, wicker ... * 99
Coke, anthracite ... 391
Cold, effects of arctic, on man ... 111
Colleges and the hard times ... 272
College, Smith ... 103
Collodion ... 197
Collodion polarizer, a ... 326
Colors, new vehicle for ... 329
Color vision, on ... * 180
Column, metallic ... * 246
Combustion, spontaneous ... (4) 26
Compass, a new circular ... 147
Compass variations on iron ships ... 146
Concrete floors ... (14) 26
Concrete for walks, etc ... 185
Cone plate for boring ... * 277
Conservatism vs progress ... 241
Cookery, cheap ... 49
Cooking chamber ... * 166
Coöperation in building ... 72
Copper, alloy of, adherent to glass ... 169
Copper, mass, of Lake Superior ... 392
Copper salts, colorless ... (12) 138
Copper, test for ... 163
Copying pencils ... 168
Corals, the growth of ... 70
Cordials, American ... 273
Core leather, a new fabric ... 296
Corner lots ... 403
Corn-husking implement ... * 70
Cottage architecture ... * 103
Cotton mathematics ... 101, 229
Counter and tell-tale, engine ... * 258
Cow tail holder ... * 355
Crane, a powerful ... * 98, * 287
Crape ... 310
Cremation in the household ... 2
Crime the result of automatism ... 5
Criminals, a new use for ... 208
Crocodile, the hen ... 265
Crookes' last discovery, Professor ... 177
Cryptococcus cerevisiæ ... 184
Crystalizing fruit ... (31) 284
Culinary apparatus, Centennial ... * 358
Cupressus nutkaensis ... * 247
Curtain fixture ... * 306
Cutters ... * 148
Cycads, the ... * 71
Cyclone, a disastrous ... 240

D

Dandruff ... (11) 267
Darning machine ... 241
Dashboard, improved ... * 22
Death in the nursing bottle ... 145
Deodorizer, new ... 287
Detonating compound ... (13) 394
Diamonds again, veneered ... 305
Diamonds, veneered ... 265
Diamonds, the formation of ... (55) 139
Diffraction lines and prismatic spectra ... * 265
Diphtheria ... 384
Diphtheria, the treatment of ... 387
Discoveries, three curious ... 386
Disease, the financial equivalent for ... 353
Disinfectants ... 193
Dissolution, a theory of ... 68
Diving bell and grapnel ... * 291
Donkey street cars ... 341
Draft of a wagon, high or low ... (37, 38*) 188
Drain pipes, ventilating and cleansing ... * 335
Drawing, mechanical ... 368
Dress, a hint on healthy ... 15
Drifts ... * 309
Drilling chilled iron ... (7) 409
Drilling hard metals, etc ... * 84
Drilling in the lathe ... * 117
Drills and drilling ... * 53
Drills, feeding ... * 53
Drills, twist ... * 53
Drive well, the patent ... 336
Dust, road, value of ... 150
Dyed goods, improving ... 329
Dyeing buffalo robes ... (24) 59
Dynamite ... 212

E

Earth pits ... * 296
Earth's interior, theories of the ... 168
Earth's surface, instability of the ... 32, (20) 155
Ebonize wood, to ... 50
Eccentric gearing ... (70) 347
Economy in use and manufacture ... 343
Education for culture or use, Is ... 128
Egyptian manuscript, an ... * 376
Electrical amalgam ... (28) 315
Electrical copying machine ... 241
Electrical exhibition in Paris ... 277
Electrical fish bait, an ... 279
Electrical News, the ... 81
Electrical phenomena, remarkable ... 263
Electrical speed recorder ... * 182
Electrical spread-eagleism ... 233
Electrical conductors, metals as ... (29) 107
Electric conductor, wood as an ... 337
Electric engine, new ... 233
Electric fall machines ... 117
Electric force and magnetism, the ... * 292
Electric force and molecular motion ... 260
Electric force, the new phase of ... *401
Electric force, what is the ... * 196, 228
Electricity and chemical combination ... 341
Electricity, discovery of another form of ... 400
Electricity from the clothes ... (2) 363
Electricity in hair ... 337
Electricity, origin of atmospheric ... 258
Electricity, twisting iron by ... 1
Electric light and heat, the ... * 356
Electric light as a signal ... 281
Electric light for locomotives ... 55
Electric light, the ... * 35
Electric machine, new ... 323
Electric motor, a new ... 241
Electric phenomena, remarkable ... 100, 165
Electro-gilding and silvering ... (26) 251
Electro-magnetic clock ... 63
Electro-magnet, regulating speed of an ... (76) 300
Electro-plating silver bath ... (27) 220
Elgin marbles, the lost ... 52
Element, a new ... 281
Elephants, a plea for the wild ... 357
Elephants, mortality among ... 215
Elevator, a new grain ... 383
Elevator, Körting's ... * 82
Elevators, New York post office ... 178
Ellipsograph ... * 230
Emery grinder, new ... 34
Employer and employed, rights to inventions ... 2
Enamels, glass ... 325
Engineer, education of the mechanical ... 292, 312
Engineering, amateur ... 224
Engineering, ancient ... 199
Engineering, progress of ... 199
Engineering structures ... * 312
Engineer's education, an ... (36) 43
Engine for blooming mill use ... * 18
Engine, oil ... 355
Engine, putting up an ... (8) 251
Engines and pumps ... * 371
Engines, driving, at American Institute fair ... 209
Engines, portable ... * 202
Engine, the Little Giant ... * 371
Engines, the power of small ... 33
Engraving machine ... * 34
Epizootic in horses ... 262
Esquimaux, ingenuity of the ... 70
Ether, methylated ... (9) 11
Ethers, silicious and aluminous ... (36) 236
Ether, the, and ponderable matter ... 85
Etching copper and steel ... 369
Etching glass ... (50) 379
Evolution, Mr. Dawson's idea of ... 176
Evolution, the goal of ... 288
Evolution, the theory of ... 153
Excavating apparatus, deodorizing ... * 223
Excuses, making ... 384
Exhibition of scientific apparatus ... 246
Expansion and contraction by moisture ... 321
Expansion, force of ... 281
Explosion at the Pullman Car Works ... 368
Explosion, remarkable ... 228
Explosion, singular ... 55
Explosion in gunpowder mills by electricity ... 177
Explosions, powder mill ... 20
Explosives, nitro-glycerin ... 212
Explosives, trials of ... 229
Exposition, the great international ... 352

F

Fair, the oldest in the world ... 231
Fastenings ... * 83
Feathers, cleaning ... (7) 315
Feed water heater and purifier ... * 127
Feed water heater, locomotive ... * 182
Fence, iron ... * 387
Fermentation from inorganic substances ... 337
Fertilizer, a cheap ... 185
Fibers, pineapple and banana ... 288
Ficaria, the ... 71
Field instrument, universal ... * 226
File a new patent ... * 322
Filter, chemical ... 66
Filters, etc ... * 404
Filth as a source of preventible disease ... 304
Finches, the ... 55
Finishing color, the ... 308
Fire bars, revolving ... * 5
Fire box, locomotive ... * 38
Fire engines, floating ... * 162
Fire escape, a new ... 256
Fire escapes wanted ... 8, 101
Fire fly, the chemical ... 121
Fireproof houses, plastering in ... 69
Fireproofing fabrics ... 121
Fireproof pasteboard ... (26) 236
Fireproof products, etc ... 38
Fishes, ancient ... 152
Fish flour ... 406
Fish, German, in American waters ... 214
Fistula, treatment of, by ligature ... 56
Flamingo plant, the ... * 247
Flanging machine ... * 15
Flea, education of the ... 370
Flies, what they do ... 388
Floating apparatus ... * 258
Floodway for warehouses ... * 191, * 370
Floor clamp ... * 102, * 118
Florakin, the ... * 231
Flouring mill, the largest ... 405
Flower pots ... * 296
Flying machine, another ... 104
Flying machinery, progress of ... 121
Foil, variegated, Japanese ... 198
Food, fermentation of ... 31
Food to work, the relation of ... 298

© 1875 SCIENTIFIC AMERICAN, INC.

Force, reducing 50
Force, the supposed new 335
Foreman, the 71
Forest, a buried 276
Franklin, Lady 38
Freezing mixtures ..... (3) 26, 330
Freezing powders 56
Freezing water in bottles ..... * 82
Friction, a curious fact 5
Friction clutch pulley ..... * 275
Frictionless joint, a ..... * 69
Friction meter ..... * 227
Frost, subterranean 387
Fruit, preserving 169
Fuel, economy in use of 163
Fuel, new source of, and its utilization 119
Fumigator, a new 389
Furnace working with petroleum * 182
Furniture of a sick room 232
Furniture, combination 256

G

Gages, glass, on boilers ..... (5) 138
Gages, tide and river ..... * 227
Galley support, printer's ..... * 402
Galvanized iron pipes ..... (4) 251
Galvanized iron, snow-flake finish on ..... (34) 268
Galvanizing iron ..... (15) 315
Gas, a new lighting and heating .. 131
Gases the vapors of liquids 321
Gases, the volume and pressure of 403
Gas explosion 327
Gas for heating purposes 389
Gas from cork 305
Gas from dead animals, etc ... 337
Gas from night soil, etc 209
Gas from petroleum ..... * 258
Gas furnaces, natural 305
Gas fuel, natural 390
Gas, Lowe's new process for 276
Gas regulator, new ..... * 259
Gas shadow, a 385
Gas wells of Pennsylvania 70
Gearing, angular ..... * 280
Gelatin molds ..... (16) 138
Geological importance of our western explorations 256
Germination of seeds, action of salts on 279
Germination of seeds, the 358
Gilding, process of 116
Glacial motion, rate and cause of 49
Glass bottles, to cut 49
Glass, cleaning 69
Glass for lighthouses, French 325
Glass manufacture, recent improvements in 17
Glass, metal 166
Glass, soluble, for outdoor work 148
Glass, the Bastie 20
Glass, to render opaque 231
Glazings, colored 325
Glue, fireproof 69
Glue, liquid 24
Glue, to prevent from cracking .. 389
Glycerin, distilling ..... (56) 139
Gold and silver, making ..... (53) 379
Gold, chloride of ..... (1) 187
Gold fields, Japanese 72
Gold from ore, obtaining ..... (22) 91
Gold, new reagent for 323
Gold, obtaining from solutions ..... (27) 139
Gold-plating solution ..... (28) 252
Gold, testing ..... (12) 283
Gophers, killing 8
Gorilla, a captive 324
Governor, Mein's patent ..... * 354
Gradients, working by locomotives ..... * 354
Graham flour, counterfeit 329
Grand Central Depot—The signal system ..... * 399, * 402
Grapes, preserving ..... * 306
Grape vines in France, American 147
Grasshopper parasite, a 15
Grasshopper plague, the 132
Grasshoppers, destroying 20
Grasshoppers, grass planted by .. 81
Grasshoppers in the West 52
Grasshoppers, to utilize 19
Grasshoppers, utilizing the 68
Grease from paper to remove (14) 395
Green, a new emerald 145
Grinder, universal ..... * 179
Great Eastern, barnacles on the. 197
Gruel, preparation of 232
Garbage, new use for 383
Gulf stream as a heat carrier, the 336
Gunboat, new, the Bermejo ..... * 146
Gun, new Russian 177
Gunpowder, power of 319
Guns and armor, cost of 23
Guns, recoil check for ..... * 406
Guns, recoil of ..... * (35) 347
Gun, the eighty-one tun, eclipsed 337
Gun, the eighty tun ..... * 239
Gun, the Krupp 360
Gun, toy ..... * 102
Gun, 1,200 pounder ..... * 391
Gutta percha and india rubber ... 9
Gutta percha, the supply of 229
Gymnasium, a pocket 341

H

Hair header 283
Hair stimulant ..... (10) 138
Hampton Court Palace and gardens ..... * 375
Happiness, the race for 372
Harness blacking ..... (62) 299
Hay, a shower of 197
Hay making, steam 101
Hay rake, horse ..... * 6
Health lift ..... * 215
Heat, effect of, on steel 281
Heater for dwellings, steam .... * 294
Heater, ventilating ..... * 262
Heat, specific 325
Hell Gate excavations, completion of the 192
Hell Gate improvements ..... * 111
Hen houses, purification of 165
Hens, corn-fed 333
Honeycomb foundations, artificial 337
Hops, preservation of 369
Horse disease, the 353
Horse feeder, automatic 256
Horses, device for protecting ... * 66
Horses, drugging 192
Horse, shall we eat the 176
Horse, the iron 52, 100
Horse yoke ..... * 50
Horticulture, oriental ..... * 379
Hospital construction, recent ... * 374
Hotel, the Palace 244
Hothouses, recently constructed * 407
Hot Springs, Ark 388
House, how to locate a 408
Houses, occupation of new 296
Hughes, El Baron de ..... * 151
Human remains in Texas 229
Hydraulic ram, the 402
Hydrofluoric acid ..... (21) 203
Hydrology of South Africa, the .. 3
Hydrometers ..... (16) 91
Hydrophobia, treament of 207
Hydro-pneumatic puzzle, the .... * 351
Hygiene, hints in 329
Hygrometer, new 116
Hypodermic injection of nutriment 342

I

Iceboats sailing faster than the wind ..... (20) 235, (21) * 331
Ice-making machine ..... * 242
Ice, remarkable shower of 215
Ice water, to preserve 194
Ice sheet, the great 96
Ideas, stray 193
Ignorance of common things, wilful 183
Iguana family, the ..... * 295
Improvements, needed 101
Incubation, temperature of .. (37) 139
Incubator, a new 273
Indian mounds, explorations of .. 152
Induced current, the 319
Induction coil, a new ..... * 344
Induction or electrostatic coil .. * 115
Ink, black ..... (40) 92
Ink, bluish green ..... (24) 268
Ink, faded, to restore ..... (8) 75
Ink, indelible ..... (4) 394
Ink, marking, aniline black 69
Ink, purple black ..... (21) 12
Ink, red-black ..... (22) 394
Inks, colored ..... (9) 315
Inks, gold and silver 103, (3) 394
Inks, marking, colored ..... (42) 108
Ink, to prevent flies eating ... (39) 188
Ink, white ..... (33) 268
In memoriam 89
Insect commission, a proposed ... 153
Insects, excommunicated 166
Insects, the strength of 64
Inventions do, what 17
Inventions, miscellaneous useful ..... * 328, * 361
Inventions patented in England 73, 89, 105, 202, 250, 265, 296, 314, 330, 345
Inventions, useful and curious .. 280
Inventions wanted 101
Inventor, a juvenile ..... * 306
Inventor's paradise, the 9
Inventors, the monopolies of 367
Iris, the great spotted ..... * 247
Iron, bending heavy 1
Iron ceiling, enameled 134
Ironclads, collision of 213
Ironclads, railway 388
Ironclad vessels ..... * 359
Ironclad vessel, the most powerful 136
Iron goods, polish on 38
Iron horse, the 52, 100
Iron mold, to remove 120
Iron, pig, in the United States .. 82
Iron sinking in the ocean ..... (16) 155
Iron, the Berlin 231
Irresolution 360
Irrigation works in India, the 128

J

Japanning small machine work ..... (31) 346
Javelle water 24, 121
Jaw wrenches, more 3
Jewelry, coloring gold ..... (4) 363
Joints in carpentry 223
Jupiter's moons ..... (69) 43

K

Kalsomine a wall, to 40
Kansas City industrial fair 145
Keely, another rival for 358
Keely gas, the 165, 244
Keely motor deception, the .2, 16, 20, 33, 48, 80, 129, 273
Keely motor, gems from the 57
Keely motor, the ..... * 20, 36, 265
Keely out-Keelied ..... * 351
Key holder ..... * 86
Keys, reverse ..... * 309
Kindling wood 241
Kite, a war 326
Kite, the crested black ..... * 231
Knapsacks ..... * 280
Knebworth Park, England ..... * 39

L

Labor, skilled 403
Ladder, fire, breaking of a 211
Lamp and oil can ..... * 198
Lamp shades, poisonous 389
Lard for market, to prepare 261
Lard, purifying ..... (37) 220
Lathe chucks ..... * 21
Lathe, combined hand and slide. * 342
Lathe, duplex wheel ..... * 15
Lead and tinfoil 82
Leather, morocco, dressing 18
Leaves, utilizing pine 256
Lenses, arranging and testing (2) 75
Leptonetus 185
Leptothrix buccalis 184
Lever power ..... * 374
Life after death, physical 80
Life preserver, a handy 52
Life-preserving mattress, new ... 295
Life raft, new ..... * 134
Life-saving apparatus ..... * 194, 260
Life-saving devices ..... 293, * 372
Life, the origin of 400
Lifting match, a 389
Light, a brilliant 136
Light, dioptric ..... * 355
Lighthouses, floating 337
Lighthouses, illumination of 406
Lighthouse, the Trinity Shoals ... * 391
Lightning rod ignorance, heavy loss from 400
Lightning rods 177, 209
Light, reflection and refraction of ..... (20) 378
Lights, intensity of different colored 47
Light, the mechanical force of .. 52
Light, the motive power of 9
Lime for oxyhydrogen light .. (27) 315
Lime in the blast furnace 261
Lining out work ..... * 373
Liquid mixer, improved ..... * 207
Liquor, cure for love of 329
Lithofracteur 212
Locomotive, a model 230
Locomotive engineers, brotherhood of 296
Locomotive semi-centennial, the 273
Locomotives, modern British .... * 271
Locomotives of 1825 and 1875, the * 307
Locomotive steam saver 373
Locomotive, the ..... * 372
Locomotive, the fireless 8
Locomotive, the Weston 289
Locusts as food 153
Lubricating device for sewing machines, etc. ..... * 322
Lucern ..... (17) 331

M

Magic, parlor 257
Magnetic curves, the 18
Magnetic pole ..... (12) 155
Magnetic railway locomotives 114
Magnetism ..... * 184
Magnetism, effect of stress on ... 280
Magnetism of iron filings 185
Magnetism on watches, effect of. 229
Magnetism, terrestrial ..97, * 164, 229
Magnetization of gas spectra 135
Magnetization of ilmenite, the ... 293
Magnetization, velocity of 47
Magneto-electric engine, a new .. * 8
Magneto-electric light, the ..... * 85
Magneto-electric machine, a (19) 299
Magnet, the Jamin ..... * 72
Man as an automaton 321
Manatee or cow fish, the ..... * 263
Manganese, black oxide of, for destroying noxious gases 261
Manners, cultivate good 78
Marking out guide bars ..... * 405
Marking out work ..... * 341
Mathematics, importance of 105
Mats, Makaroff's 341
May bugs, new use for 21
Meat, preservation of 281
Meat, tainted 2
Mechanical age, the 376
Mechanical movement, a new 85
Mechanics, a word to young 8
Medical notes 56
Medical strike, a 5
Medical work, the oldest ..... * 76
Melanosis 56
Melon cucumbers ..... * 311
Mercurial ointment ..... (31) 347
Mesembryanthemums ..... * 167
Metal, anti-friction 233
Metal arches 5
Metal industries, Russian 120
Metals, prices of 169
Metal, white, free-flowing ..... (4) 409
Metal, white, inoxidizable 119
Meteorite of February 12, 1872, the 104
Meters, liquid ..... * 404
Microscope, a home-made ..... * 275
Microscope lenses (32, 34, 37) ... 395
Microscopical researches 3
Microscopical soirée, a 278
Microscopic bi-centennial, a 321
Milking tubes, improved ..... * 70
Milk, preserving in England 389
Milk, solidified 289
Milk, use of 232
Mills, improved grinding ..... * 278
Mill, the Grange farm ..... * 246
Mines, coal, light in 400
Mines in Bohemia 264
Mines, the Cumberland hematite * 338
Mississippi jetties, the 55
Mississippi river, improving the mouth of the 197
Mississippi, the jetties at the mouth of the 200
Molasses manure 287
Molding machine, ornamental .. * 166
Monads 185
Money, hard, what is 368
Monument at sea, a 5
Moon's revolution, the ..... (50) 204
Mortar, hair in 211
Mortar, to make ..... (26) 42
Mortising and boring machine ... * 291
Mosquito bar, a 129
Mosquitoes, bats as a remedy for. 226
Mothers of scientific men 104
Moths from bee hives, to keep (3) 11
Moths, the currant and raspberry * 115
Moth, the cobweb apple ..... * 135
Motion, cosmical, a mechanical theory of 132
Motor, cold air, No. 2 ..... * 101
Motor, hydraulic 233
Motors, novelty in 233
Mound explorations 210
Mountain gaps, how formed 320
Mountains, the origin of 289
Mouth, the human, plants and animals in the 184
Mucilage, a new 374
Museum of natural history, Mrs. Maxwell's 264

N

Nail extractor ..... * 150
Napper and brusher, combined .. * 6
Nares, Captain G. S. 130
Nature, the uses of 112
Nebulæ, a new theory of the 372
New books and publications .. 73, 153, 202, 249, 266, 314, 330, 345, 362, 393
Newspaper circulation and advertising 182
Newton's experiments, Sir Isaac. 403
New York dock department, the. 65
New York geology 153
Nickelization 342
Nickel-plating iron ..... (14) 235
Nickel plating, solution for ... (2) 155
Nitrification of arable earth ... 113
Nitro-glycerin and water, difference between 81
Nitro-glycerin preparations 212
Noon, determining ..... (28) 59
North pole, how to reach the 389
Norway, from 358
Notes and queries: 11, 26, 42, 59, 75, 91, 107, 123, 138, 155, 171, 187, 203, 219, 235, 251, 267, 283, 298, 315, 331, 346, 363, 378, 394, 409

O

Oak stain for wood 116
OBITUARY:
Bauer, Wilhelm 127
Blackford, John 38
Bradley, Leverett 223
Donaldson, W. A 81, 153
Franklin, Lady Jane 79
Henwood, W. F 200
Logan, Sir William E 89
Pond, L. W 278
Schneider, Eugene 389
Singer, Isaac M 101
Tillman, Samuel D 223
Tracy, Edward H 180
Webster, Thomas 19
Wheatstone, Sir Charles, 289, 311
Wilson, Henry 370
Winlock, Joseph 149
Ocean level, constancy of the 113
Oidium albicans or white plant ... 184
Oil car, new 281
Oil cloths, to renovate 357
Oil diagometer, the 242
Oil for slate paint ..... (4) 346
Oil, purifying lubricating 56
Oils, dryers, and colors 308
Oils, fatty, testing 360
Oil, sperm, to purify ..... (40) 108
Oils, testing the fatty 360
Oilstones, truing 360
Oil tree, the Chinese 342
Oleaginous seed, new 197
Onions from maggot, to preserve 146
Opera house, the new Paris 134
Optical delusion, an ..... (29) 171
Optical experiment 329
Orange crop, Californian 225
Ordnance, American 120
Orton, Professor James 388
Oxuvitic acid 151
Ozone, decolorizing property of. 22

P

Paint, a cheap 263
Paint, cracking of 308
Paint from coal ashes 79
Painting a wall ..... (14) 363
Painting, practical 307
Painting woodwork ..... (12) 26
Painting wrought iron 34
Paint, mixing the 308
Paint, priming 308
Paint, to dry 308
Paints, white, turning yellow 6
Paper, indelible transfer ..... (4) 42
Paper on drawing boards, to fix .. 321
Paper plants 119
Paramecia 185
Parasites of the house fly 241
Patella, fracture of, cure of 56
Patent bill, the English 128
PATENT DECISIONS OF THE COURTS:
Bale tie 249
Barrel head linings 153
Bottle fastener 202
Box-nailing machine 73
Canned corn 234
Collar, paper 9
Design patents 201
Elevator 169
Fluting machine 136
Gas apparatus 89
Gas machine 136
Hotel register 345
Patent assignees 249
Planer 296
Press 217
Pump 201
Rubber pencil heads 136
Shade fixture 136
Sugar machine 73
Patented car improvements 120
Patented in America, a lost art .. 340
Patent law discussion, English ... 80
Patent laws, international 242
Patent laws, proposed change in the English 88
Patent one-tailed shirt, the 182
Patent rights of employer and employed 2
Patents, American and foreign: 10, 25, 40, 57, 74, 90, 105, 121, 137, 154, 169, 186, 202, 217, 234, 250, 266, 282, 297, 314, 330, 345, 362, 377, 393, 408
Patents, foreign—Reduction of costs 273
Patents, foreign—Splendid opportunities for Americans 305
Patents, French 341
Patents have done for us, what .. 9
Patents, official list of: 12, 28, 44, 60, 76, 92, 108, 124, 140, 156, 172, 188, 204, 220, 236, 252, 268, 284, 300, 316, 332, 348, 363, 379, 395, 409
Patents, official list of Canadian: 12, 28, 44, 60, 76, 92, 108, 124, 140, 156, 172, 188, 204, 221, 237, 252, 268, 285, 301, 316, 332, 343, 380, 396
Patents, our debt to 56
Patents, relation of to the various industries 281, 324
Patents, resignation of the Commissioner 113, 177
Patents, the new Commissioner of 193
Patent system, a defence of our. 9
Patent, the Woodbury 176
Patterns for scroll saw works 353
Peach borer, the ..... (25) 303
Peach crop, an enormous 97
Pencil, adding ..... * 214
Pens, dotting 342
People, a queer 4
Pepper, bird ..... (48) 220
Perchloride of iron ..... (8) 235
Perfume, new 289
Perspiration ..... (4) 123
Petroleum, analysis of ..... (33) 220
Petroleum, distilling ..... (18) 138
Petroleum paraffin 103
Phœnix, a mechanical ..... * 371
Phonometer, the 116
Phosphorus light ..... (12) 409
Phosphorus oil ..... (16) 219
Phosphorus poisoning, antidote for 113
Photo-engraving 178
Photographic diagnosis, a 225
Photographic printing, bichromate ..... (11) 235
Photographs by machinery, printing ..... * 136
Photography, bichromate and gelatin ..... (42) 139
Photography of children 148
Photography, spirit, under a cloud 38
Photo process, new dry 216
Photo sensitive paper, preserving 210
Phylloxera remedy, new 48
Physiological problem, a 335
Pickerel, the voracity of 49
Picric acid in beer, detecting 161
Picric acid, profitable source of .. 167
Pigeon post, a transatlantic 295
Pin, a new 337
Pipes, bending, new method of .. * 150
Planer war, the Woodbury 320
Planetary atmospheres, the 17
Planets, new 72, 389
Planing machine, model 325
Planing machine pressure blocks * 102
Plants, artificial coloring of ..... * 311
Plants, carnivorous 153
Plants, insect-eating 192
Plants, insect fertilization of .. 153
Plants, pot, management of 71
Plants, the animalism of ..... * 7
Plant vases for decoration ..... * 407
Plaster casts, preserving 22
Plastering, new system of 233
Plaster rubbish, utilization of 375
Plaster, to make ..... (21) 26
Plated goods, tarnished ..... (3) 251
Plate shearing machinery ..... * 390
Pneumatic tubes, 80 miles an hour in 167
Pneumatic tubes in London 163
Podometer, the, or walking distance indicator ..... * 98
Polar expedition, the English 178
Polar region, the north 31
Poisoning by arsenical wall paper 325
Poisons, general antidote for 21
Poison stories, curious 353
Pole, the search for the 2
Polishing moldings 233
Polish, oil, on doors, etc ..... (14) 219
Polygon, area of a ..... (17) 409
Ponderable matter and the ether. 84
Pontoons, pneumatic 341
Popoff, Admiral ..... * 87
Population, the center of 151
Port wine, adulteration of 337
Postal and telegraph service 391
Postal laws, the—Amendments needed 240
Postal law, that obnoxious 385
Post office, the new, New York city ..... * 175
Potato beetle, the Colorado 52
Potato bugs poisonous, are 153
Potato bug, the best extermina tor of the 32
Potato bug, the Colorado ..32, 116
Potato disease, the 68
Pottery, glaze for (boro-silicate of soda) ..... (30) 92
Power, 4,000,000 horse, from a coffee mill 105
Power of waterfalls 303
Practical mechanism: 21*, 53*, 84*, 117*, 148*, 180*, 212*, 245*, 277*, 309*, 341*, 373*, 405*
Preserves in jars 118
Press, drawing ..... * 310
Printing press for woodcut printing ..... * 259
Prism, liquid, substitute for .. 325
Prizes for designs for a villa 388
Prizes for metallurgical improvements 207
Proctor, Professor 178
Propeller, a new ..... * 322
Propeller, Griffith's 242
Propeller, recent improvements in the screw ..... * 386
Propeller, the Hercules screw .... * 134
Propeller, the screw, defects in (41) 172
Protosulphide of carbon 113
Psycho mystery, the ..... * 291
Public Health Association, the ... 353
Puffing machine, a 257
Pulley block ..... * 354
Pulleys, sizes of ..... (10) 187
Pump, donkey ..... * 391
Pump, steam jet bilge ..... * 115
Pump, three-cylinder ..... * 4
Punch and shearing machine ..... * 143
Punctuality in all things 388
Putty, the best 308
Pyrometer, new ..... * 50

Q

Quartz crystals ..... (8) 171

R

Rabbits, exterminating ..... (21) 235
Races, boat, horse, and human .. 105
Races, collegiate 65
Raft, a living 3
Rafter scale and bevel gage ..... * 134
Railroading in Switzerland 38
Rails, iron and steel 342
Rails, long 325
Rail, the law of the 265
Railway carriages, Giffard's ..... * 275
Railway joints, fish plates for ... * 294
Railway liability for freight 18
Railway, new elevated 294
Railway rail, improved ..... * 19
Railway rail, street ..... * 55
Railways, comparative safety of. 199
Railway, Southern Pacific 307
Railway station, Great Eastern, London 40
Railway tie ..... * 230
Railway track, improved ..... * 38
Railway traveling, Rocky Mountain 217
Rains, the cause of profuse 144
Rapid city transit, progress of 160
Rapid transit in New York 64
Raspberry vinegar 55
Rat plague, a 72
Rats, concrete to exclude 72
Rats, remedy for 210
Reading rooms, working men's .. 385
Reamers ..... * 180
Reaping and mowing machinery * 119
Recipes, useful: 24, 56, 69, 85, 120, 148, 169, 185, 249, 265, 325, 357
Red, poppy, die for flowers 289
Red, staining wood 169
Refrigerating machine, the Tellier 294
Refrigerator and counter ..... * 278
Refrigerator steamer, proposed .. * 322
Refrigerator, the Fisher 114
Relics, ancient human 153
Residences, model ..... * 23
Rest, laborious 262
Rhinoceros, skinning a 356
Rice, to boil 121
Riding, fast 321
Rifle contest, the Irish-American * 40
Riveting by hydraulic power ..... * 47
Riveting cold metal 357
Rokitanski's farewell address 247
Rooster, the cataleptic ..... * 147
Rope socket ..... * 18
Rope, strength of 294
Rope, wetting a ..... (5) 251, (42) 284
Roses, growing 49
Rotary engines and pumps ..... * 371
Rubber boots, cracking ..... (46) 379
Rust from steel, to remove 56
Rust on iron and steel, preventing 169

S

Sadiron, improved ..... * 358
Safe, kitchen 233
Sailing faster than the wind (20) 235, (21) * 331
Salicylic acid 56, 96, 151
Salicylic acid for preservation ... 197
Salicylic acid, increasing solubility of 86, 147
Salicylic acid, snow white 50
Salicylic and benzoic acids 151
Salt 338
Salt, Ah Chu and his 230
Salt for domestic animals 342
Salt water to fresh, changing ... * 214
Sambur, the ..... * 343
Sand blast, new use of the 1
Sawdust, plastic 148
Saw, filing a 295
Sawing and grooving machine .... * 303
Sawing hard and soft woods 306
Sawing machine, treadle ..... * 66
Saw-making, remarkable feat in. 369
Saw sharpener ..... * 255
Saws, straightening ..... (5) 11
Sciatica 56
Science, American Association for the Advancement of .136, 152
Science on the Pacific slope, prospects of 65
Science pugnacious 209
SCIENTIFIC AMERICAN, back numbers of 86
SCIENTIFIC AMERICAN, six good reasons for patronizing the .. 385
SCIENTIFIC AMERICAN SUPPLEMENT, the 369
SCIENTIFIC AMERICAN, value of the 116, 201, 249
Scientific and practical information 3, 21, 49, 72, 113, 145, 161, 197, 225, 241, 281, 289, 305, 321, 337, 369
Scientific courtship 244
Scientist, a model 300
Scissors and ripping knife, combined ..... * 234
Scouring liquid 329
Screw cutting die and holder ..... * 390
Screws, drawing obdurate 119
Screw threads in holes 358
Screw threads, proportions of (10) 155
Sebastopol, the allied attack on .. 373
Sea, the level of the ..... (28) 171
See, what do we 144
Senses, the trustworthiness of the 16
Sewer gas dangers 287
Sewing machine monopolists, the 358
Sewing machines in Scotland 329
Sewing machines, sale of 264
Shaft, a 15 inch, mending at sea .. * 240
Shafting accidents, preventive for 69
Shaping machine, double ..... * 403
Shell, the water 201
Shingles, durable 342
Ship, circular, Russian ..... * 87
Ships and other bodies in water, new theory of resistance 217
Shoemaker's, opportunity the .... * 264
Siberia, new route to 376
Sick room, common sense in the 232
Sidewalks, india rubber 22
Siege of Paris, the 374
Sight from science 249
Sight, the education of 160
Signal in the world, the highest .. 323
Signals and switches, Rousseau's system ..... * 399, 402
Silk harvest of the world 117
Silk-spinning machinery ..... * 406
Silks, weighted 23, 148
Silver bath from ditch water 324
Silver, cleaning ..... (14) 331
Silver from alloys, extracting. .. 24
Silver from crucibles, recovering * 372
Silver from old crucibles ..... (28) 39
Silvering glass 340
Silver, nitrate of ..... (1) 187
Sink in the ocean, how far will bodies 208
Skilled labor 403
Skimmias, the ..... * 311
Skin, the season and the 375
Slates, securing 227
Sledge, new arctic ..... * 51
Slide valve calculator ..... * 67
Slotting machine tools ..... * 277
Smoke condenser, new 294
Smokers, a mouthful for 3
Smokers, hygiene for 390
Snake within a snake, a 277
Snuff for insects 103
Soda lakes in Wyoming 261
Soda manufacture 102
Solar engine, a 305
Solarradiation, new phenomena of 69
Solder for silver ..... (14) 331
Soldering, improvement in 71
Sounding apparatus ..... * 357
Sounding by piano forte wire .. * 211
Sounding in the Gulf of Mexico .. 166
Southern States agricultural exposition, the 325
Space, what fills the interstellar. 304
Sparks, weak 385
Specific gravity and dimensions of molecules 340
Spectral lines and atomic weights 340
Spectrum, cold bands in the 370
Speculum metal ..... (11) 298
Spider's web, the 5, 68
Spirit of wine ..... (9) 11
Spirit rifle practice 129
Spiritual Scientist, the 151
Sponge, compressed, for abscess 56
Sportsmen and hunters 213
Spring, gang plow ..... * 22
Square, laying out a ..... * 325, * 372
Stains, removing with magnesia. 373
Stairs, aid in going up 233
Stamp, rotary hand ..... * 19
Starch, polishing 185
Stealing brains 161
Steam as a fire extinguisher 358
Steam at 500 lbs pressure 199
Steamboats, fast ..... (43) 284
Steam cultivation ..... * 386
Steam donkey, the 159
Steamers, steering of screw 216
Steam horse, another 19
Steamships, trials of screw 216
Steam street car construction 104
Steam, the song of 40
Steel bronze 98
Steel bronze an American invention 144
Steel, compressed ..... * 179
Steel ingots, new method of casting ..... * 275
Steel in one-ton ingots, casting . * 99
Steel manufactures, the Sheffield * 291
Steel, polishing ..... (29) 284
Steel, vessels of 357
Steel works, new 214
Stevens Institute commencement, the 18
Stove blacking 169
Strike, the Fall River 240
Strong room for valuables ..... * 319
Strychnin, death by 148
Strychnin, poisoning by 340
Subterranean festivities 281
Suffocation in the earth 255
Sugar, American refined 231
Sugar and sirup, purifying .... (13) 267
Sugar-cutting machinery, English 118
Sugar machinery 257
Suicidal epidemic, a 276
Sulphuretted hydrogen ..... (5) 42
Sulphuric acid, action of, on lead, etc 135
Sulphuric acid, production of .... * 374
Sun and the latitude ..... (1) 138
Sun, constitution of the 216
Sun spots and atmospheric forces 216
Sunstroke, death by ..... (14) 138
Surfaces, flat 257
Suspended animation as a preserving agent 225
Swans ..... * 183
Swedenborg as a chemist ..... * 354
Swimming across the English Channel 165
Swimming apparatus, automatic. 305
Swimming feat, Captain Webb's. 227
Swimming, remarkable 214
Swindles, the natural history of .. 17
Swordfish exploits 47

T

Tænia and raw meat 388
Tea kettle, improved ..... * 274
Teaspoonfuls 224
Teetotallers, a new argument for 353
Telegraph cable, the direct 163
Telegraph charges, to reduce 5
Telegraphing, cable 276
Telegraph instrument, duplex 6
Telegraph poles, new style of .. 118
Telegraph poles, take them out of the streets 407
Telegraph poles, wood, preserving 183
Telegraph printers, the duplex ... 55
Telegraphs, private, in France ... 341
Telegraph system, a new 327
Telegraph wires in tubes 273
Telegraphy 199
Telegraphy, progress of American 273
Telegraphy, progress of—One wire for many instruments .. 151
Telegraphy, quadruplex, in India 289
Telescope at Paris, the large 229
Telescope lenses ..... (4) 155, (6) 298, (30, 36) 359
Telescope, the million dollar 257
Tellurium in Chili 337
Temperature of a sick room 232
Temperature, underground 216
Tempering tooth chisels ..... (60) 379
Temples, God's first 395
Terra cotta ..... (64) 43
Testing eggs 249
Testing gum arabic ..... (1) 251
Textile industries 199
Textile industry, a new 147
Thermometer, mercury in a .... (1) 409
Thermoscope, new clinical ..... * 66
Therylene, synthesis of 35
Tides in the Gulf of Mexico 116
Tiles, pictorial 168
Time check, watchman's ..... * 306
Timely suggestions 401
Times, dull, in Great Britain 71
Tin and lead foil 82
Tin for tinning 335
Tin, labels on 53
Tin small castings, to 279
Tire-upsetting machine ..... * 246
Toads, do not kill the 129
Tobacco, removing aroma from (12) 378
Tools, driving portable ..... * 146
Tools, heavy vs. light 163
Too much of a good thing 295
Torpedo system, is it useless? 272
Torpedo trials at Newport, R. I .. 195
Tortoises, land 263
Trade in England 389
Trade marks, centennial 81
Trademarks, rise and progress of 273
Tradesmen's Industrial Institute, the ..... * 351
Transferring pictures to painted surfaces 169
Transits of Venus behind the sun 131
Tree for the Centennial, California 151
Tree protection, national 197
Trees, great, in California 119
Trees in California 390
Trichinosis, alarming spread of. 249
Tubes and water pipes, enameled 233
Tube Works Company's trophy, the 73
Tunnel at Rio de Janeiro 388
Tunnel in Algiers, Roman 165
Tunnel, railway, under the English Channel 209
Tunnel, railway, under the London Docks 370
Tunnels, railway, ventilating, Dixon's system ..... * 79
Tunnel, the British Channel 382
Tunnel, the St. Gothard 309
Tweer for smiths's use ..... * 86

U

United States court, New York city ..... * 178

V

Vacuum, obtaining ..... (5) 267
Valve, safety, mercurial ..... * 198
Valve, stop ..... * 147
Valve, test, square inch ..... * 214
Valve tests, safety 191
Vanadium in rocks 47
Vanguard, sinking of the 225
Vanilla from wood pulp 145
Varnish for guns, etc ..... (23) 42
Varnish from mica 56
Varnishing 308
Varnish, insulating ..... (57) 27
Varnish, Japan ..... (9) 26
Varnish, yellow, for tin 85
Velocity, its increase and arrest .. 230
Ventilating by machinery 353
Ventilation, common sense 265
Ventilation of a sick room 232
Ventilation, window 22
Vessels, vertical motion of 276
Villa, a model ..... * 215
Vinegar, detecting sulphuric acid in 22
Vinegar, testing ..... * 402
Vineyard, the Garston, England . * 327
Violins, making ..... (29) 59
Vise, improved ..... * 198
Vise, sudden grip ..... * 118
Vivisection, the value of 213
Volcanic action, the source of .. 353
Volcano revelations, some new .. 160
Volcano, the youngest 98

W

Wagner Free Institute, the 343
Walls, stucco for brick ..... (22) 215
War engines, ancient ..... * 323
War material destroyed 88
Washing vehicles, importance of 303
Watches, English and American. 105
Water, a motor 244
Water and its inhabitants 39
Water and nitro-glycerin, difference between ..... * 81
Water closet, odorless ..... * 326
Water closet, to put up a 57
Water, dietetic effects of 211
Water elevator, duplex ..... * 326
Water for fish ponds, pipe for .. 4
Water, fresh, rudimentary existence in ..... * 1
Water gas delusion again, the 352
Water pressure engine ..... * 195
Waterproofing paper ..... (22) 203
Waterproof packing paper 17
Waterproof walls ..... (4) 107
Water, testing ..... (2) 187, 281
Water, testing the color of ..... * 57
Water, the purification of 387
Water through pipes, under pressure ..... (21) 315
Water wheel bearings 303, 351
Water wheel buckets ..... * 260
Water, when unfit to drink 336
Waterworks, constant pressure .. 340
Wave motion ..... (29) 171
Wave motion, measuring 216
Wave motion, propelling ships by 216
Waxing stove patterns ..... (19) 409
Wealth, uncertainty of 387
Weather glass, the 230
Weatherstrip, Eureka ..... * 230
Weather, the recent wet 148
Welding iron, Belgian compound ..... (19) 138
Well-boring tools ..... * 54
Wells, artesian ..... * 54
Whale power vs. steam 85
Wheelwright's machine, universal * 406
Whistling, national differences as to 310
White finish on glass ..... (8) 394
Wind instruments 226
Wire fence, making 241
Wire in deep sea soundings, use of 81
Wood-carving machine ..... * 95
Wood, preserving 365
Wood pulp ..... (5) 26
Wood sorrel in epithelioma 56
Wood stain, walnut 337
Woodwork, the protection of, etc . 357
Wool, mineral 53, 337

Advertisements.

Back Page - - - - - - $1.00 a line.
Inside Page - - - - - - 75 cents a line.

Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Friday morning to appear in next issue.

SPECIAL SALE OF CHUCKS—One half dozen of each size of the Oneida Steam Engine Co 's Universal and Independent, three and four jaw Chucks, Westcott's Patent. Address R. E. STATE, Springfield, O.

LATHE WANTED—48 in. Swing, 20 feet Bed. Second hand. Must be in good order. THOS. WORSWICK, Guelph, Ont.

THE COPARTNERSHIP OF J. P. VERREE & Co. being about to expire by limitation, that firm, now engaged in the manufacture of edge tools, hammers, &c., at Verree's Mills, Philadelphia desiring to discontinue business, offer for Sale the good-will, stock, and fixtures of said concern at a reasonable figure. The property can be leased for a term of years at a much reduced rate. Address J. P. VERREE & CO., Verree's Mills, P. O. Philadelphia, Pa.
JOHN P. VERREE. W. G. JUSTICE.

PUNCHING AND DROP PRESSES. For the Best and Cheapest, address THE STILES & PARKER PRESS CO., MIDDLETOWN, CONN.

With Disston's Saws.



4 Sizes

Sold by Hardware Trade. LANGDON MITRE BOX CO., Millers Falls, Mass. ☞ Send for Circular.

HOW TO WARM YOUR HOUSE.—Read.—"The Gothic Furnace in my house gives entire satisfaction; it is very easily managed; the shaking apparatus being especially good. It furnishes plenty of heat, and allows no gas to escape. I consider myself fortunate in having selected your furnace, after much investigation and inquiry, to replace one that had given me a great deal of trouble and annoyance, and I believe it is the best furnace in use."—RUFUS G. BEARDSLEE, 47 West Fifty-fifth Street, of the Board of Education. To ALEX. M. LESLEY, 226 West Twenty-third Street. Send for catalogue, or call and see the furnace.

For Sale,

The valuable Machine Works known as

The SOUTHWARK FOUNDRY, Philadelphia,

Owned and for Sale by the late firm of

MERRICK & SONS.

Lot 352x396—four fronts.
A railroad track, connecting with main line on Washington Avenue, runs through the works. All the buildings and tools are first class.
The establishment can work to advantage from 600 to 800 men, and produce to the value of one and a quarter millions annually.
Address, for full particulars,
ROOM 3, 3D FLOOR,
230 South 3d St., Philadelphia, Pa.



AMATEURS AND ARTIZANS.
THE FLEETWOOD SCROLL SAW, WITH
Boring Attachment & Blower,
IS UNEQUALLED FOR
Rapidity, Accuracy, Durability,
and **Low Cost.**
Saws **Wood** 1 in. thick and under; also **Metals, Horn, Bone, Ivory, Shell,** &c., and makes the **most delicate Designs of Inlaid & Scroll Work.**
Price $10 to $15. Drill Attachment, $5.50. Send for pamphlet and list of Designs of Fret Work. TRUMP BRO'S, Manufacturers, Wilmington, Del.

WANTED—A good Foundry Pattern Maker, also a good Moulder, one having a small capital to invest in trade preferred. Apply with stamp.
T. B. BLAKE, Olathe, John Co., Kans.

SMALL POX.—Prevent its pitting. A sure, safe, and infallible remedy. Every house should keep it. Price $1.00. Apply to J. ZACK TAYLOR, M.D., Deal's Island, Md.

OK. DINNER PAIL, 50c.—Best and most Convenient Ever Sold. F. E. HEINIG, Louisville, Ky.

FOR SALE—One half interest in a Tobacco Patent. For particulars, address
D. A. ALDEN, Malden, Mass.
☞ No Brokers.

$250 A MONTH—Agents wanted everywhere. Business honorable and first class. Particulars sent free. Address J. WORTH & CO., St. Louis, Mo.

$500 IN GOLD GIVEN AWAY, also 50 per cent Commission. You can make from $10 to $20 daily. FAMILY JOURNAL CO., 292 Broadway, N. Y.

CENTENNIAL DRILL CHUCK—Warranted perfect and durable. Holds 1-64 to 1-2 in Sent by mail on receipt of price, $4.25. Send for new reduced List of Chucks.
A. F. CUSHMAN, Hartford, Conn.

Machinery of Improved Styles for making
SHINGLES, HEADING AND STAVES.
Sole makers of the well known IMPROVED LAW'S PATENT SHINGLE AND HEADING SAWING MACHINE. For circulars, address TREVOR & CO., Lockport, N.Y.

WROUGHT IRON BEAMS & GIRDERS

THE UNION IRON MILLS, Pittsburgh, Pa.—The attention of Engineers and Architects is called to our improved Wrought-Iron Beams and Girders (patented), in which the compound welds between the stem and flanges, which have proved so objectionable in the old mode of manufacturing, are entirely avoided. We are prepared to furnish all sizes at terms as favorable as can be obtained elsewhere. For descriptive lithograph, address Carnegie Brothers & Co., Union Iron Mills, Pittsburgh, Pa.

The HOADLEY PORTABLE STEAM ENGINE.
WITH
AUTOMATICAL CUT OFF REGULATOR
AND
BALANCED VALVE



STATE WHERE YOU SAW THIS
THE BEST AND MOST ECONOMICAL ENGINE MADE
SEND FOR CIRCULAR
THE J. C. HOADLEY CO. LAWRENCE, MASS.

CLARK & COMPANY'S
PATENT SELF-COILING, REVOLVING STEEL SHUTTERS

Can be readily fitted to Store Fronts, Rear Windows or other openings, making them FIRE AND BURGLAR PROOF, and affording absolute protection; also, **WOOD SHUTTERS** in various kinds of wood, suitable for Store Fronts, Private Houses, Offices, and School Partitions. Clark's shutters are self-acting, require no machinery or balance weights, and cannot get out of order. They are handsome in appearance, and are the best and cheapest shutters in the world. Are fitted to the new *Tribune* Building, Delaware and Hudson Canal Building, Manhattan Building, Lenox Library Building. Have been for years in daily use in every principal city throughout Europe, and are endorsed by the leading architects of the world.
JAMES G. WILSON, Manager, 218 West 26th St., New York, and at London, Paris, Vienna, Berlin, Melbourne, &c., &c.
AGENTS WANTED.

THE
Bigelow Engine,



The Cheapest and Best Portable Engine offered to the Public.

Price, 4	Horse	Power	$300
" 6	"	"	400
" 7	"	"	475
" 8½	"	"	540
" 12	"	"	725
" 15	"	"	800

Price of Stationary Engines:

4	Horse	Power	$150
6	"	"	175
7 to 8½	Horse	Power	225
12 to 15	"	"	300

Send for Illustrated Circular and Price List.
H. B. BIGELOW & CO., New Haven, Conn.

$5 to $20 per day at home. Samples worth $1 free STINSON & Co. Portland, Maine.

The TOLL-GATE! Prize Picture sent free! An ingenious gem! 50 objects to find! Address with stamp, E. C. ABBEY, Buffalo, N Y.

Brainard Milling Machines all styles and sizes
A new *Universal* Milling Machine for $200. Also Brown's Pat. SCREW MACHINES, and our new Brainard STEEL BAR VISE. B. M. M. CO., 131 Milk St., Boston, Mass.

OPIUM and Morphine habit absolutely and speedily cured. Painless: no publicity. Send stamp for particulars. Dr. Carlton. 187 Washington St., Chicago, Ill.

Hammond's Window Springs.
for all windows. Six Samples mailed for 50 cents.
W. S. HAMMOND, Lewisberry, York Co., Pa.



Barnes' Foot-power Scroll Saws and Lathe.
An entire REVOLUTION in the construction of foot-power machines! The old style thrown aside when these are known! Thousands now in use! $1,500 to $2,000 per year made using them. One person out of every three who send for catalogues of these machines buys one. Say what paper you read this in, and address
W. F. & J. BARNES,
Rockford, Winnebago Co., Ill.
Box 2044.

FINE MACHINIST'S & AMATEUR TOOLS, Foot Lathes, Polishing Lathes, Centennial Grind Stones, Taps, Dies, Drills, Automatic Boring Tool, Fleetwood Scroll Saws. Send 6 cents in Stamps for Complete Illustrated Catalogue. JACKSON & TYLER, 16 German Street, Baltimore, Md.

PATENT DOUBLE ECCENTRIC CORNICE BRAKE. Manufactured by THOMAS & ROBINSON, Cincinnati, O. Send for Circulars.

PATENT
Planing and Matching

and Molding Machines, Gray and Wood's Planers, Self-oiling Saw Arbors, and other wood-working machinery. S. A. WOOD'S MACHINE CO., 91 Liberty St., N. Y. Send for Circulars, etc. 67 Sudbury St., Boston.

PATENT
COLD ROLLED SHAFTING.

The fact that this shafting has 75 per cent greater strength, a finer finish, and is truer to gage, than any other in use, renders it undoubtedly the most economical. We are also the sole manufacturers of the CELEBRATED COLLINS' PAT. COUPLING, and furnish Pulleys, Hangers, etc., of the most approved styles. Price list mailed on application to JONES & LAUGHLINS, Try Street, 2nd and 3rd Avenues, Pittsburgh, Pa. 190 S. Canal Street, Chicago, Ill.
☞ Stocks of this Shafting in store and for sale by FULLER, DANA, & FITZ, Boston, Mass. GEO. PLACE & CO., 121 Chambers St., N.Y. PIERCE & WHALING, Milwaukee, Wis.

OTIS' SAFETY HOISTING Machinery.

OTIS, BROS. & CO.,
No. 348 BROADWAY, NEW YORK.

PILES. A Sure Cure. Trial box only 25c. F. W. Putnam, 95 E. B'way, N.Y.

Machinists' Tools,

All sizes at low prices. E. GOULD, Newark, N. J.

WITHERBY, RUGG & RICHARDSON, Manufacturers of Woodworth Planing, Tongueing, and Grooving Machines, Daniel's Planers, Richardson's Patent Improved Tenon Machines, Mortising, Moulding, and Re-Saw Machines, and Wood-Working Machinery generally, 26 Salisbury Street, Worcester, Mass. (Shop formerly occupied by R. BALL & CO.)
L. B. WITHERBY. G. J. RUGG. S. M. RICHARDSON.

10 DECALCOMANIE, or TRANSFER PICTURES, with book of 24 pp., giving full instructions in this new and beautiful art, sent post-paid for 10 cts, 100 ass'td pictures, 50 cts. They are Heads, Landscapes, Animals, Birds, Insects, Flowers, Autumn Leaves, Comic Figures, &c. They can be easily transferred to any article so as to imitate the most beautiful painting. Also, 5 beautiful GEM CHROMOS for 10 cts.; 50 for 50 cts. Agents wanted.
Address J. L. PATTEN & CO., 162 William Street, New York.

NEW & SECOND HAND WOOD WORKING Machinery, Floorers, Planers and Matchers, Single and Double Surfacers, Moulding Machines, Scroll Saws, Suction and Blast Fans for Shavings, etc. D. J. LATTIMORE, 31st and Chestnut St., Philadelphia, Pa.

J. M. CARPENTER

MANUFACTURER OF FIRST CLASS TAPS, Pawtucket, R. I.

FINE TOOLS

For Machinists, Jewelers, Engravers, Watchmakers, Amateurs, and others. Also, a fine assortment of File and Steel Wire Supplies, at FRASSE & CO.'S, 62 Chatham Street, New York.

IMPORTANT FOR ALL CORPORATIONS AND MANF'G CONCERNS.—**Buerk's Watchman's Time Detector,** capable of accurately controlling the motion of a watchman or patrolman at the different stations of his beat. Send for circular.
J. E. BUERK, P. O. Box 979, Boston, Mass.
N. B.—The suit against Imbaeuser & Co., of New York, was decided in my favor, June 10, 1874. Proceedings have been commenced against Imbaeuser & Co. for selling, contrary to the order of the Court, and especially the clock with a series of springs in the cover, and marked Pat'd Oct. 20, '74. Persons using these, or any other clocks infringing on my Patent, will be dealt with according to law.

RACING BOAT STOCK.
SPANISH & WHITE CEDAR.

Extra lengths and quality, from 3 16th thick up, planed and unplaned. Also, full stock of HARD-WOOD LUMBER and VENEERS, MAHOGANY, SATINWOOD, ROSEWOOD, WALNUT, &c.
Inclose Stamp for Catalogue and Price-List.
Geo. W. Read & Co.,
186 to 200 Lewis st., ft. 5th & 6th sts., E.R., N.Y.



WASHINGTON, D. C., Sept. 13, 1875.
JNO. MAYHER, Treas. Valley Machine Co., East Hampton, Mass.
Dear Sir: The "Wright Bucket Plunger Steam Pump" you built for the Government "works like a top." Am sure it has never had its equal in any of the Departments, and I have no hesitancy in recommending this Pump to any one in want of a first class, noiseless Steam Pump. Very respectfully,
J. THOS. MILLER, Chief Engineer U. S. House of Representatives.
Send to us for Catalogue.
V. M. COMPANY.

The Myers Portable Engine, 4, 5, 6, 8 h.p. Something new. Best for price. Circulars.
SECOND-HAND IRON AND WOOD WORKING MACHINERY.
CHAS. PLACE, 103 Reade Street, New York.



8,000 in Use
Blake's
STEAM PUMPS
for every possible duty. Send for Illustrated Catalogue.
GEO. F. BLAKE M'F'G CO.
86 & 88 Liberty Street, New York,
Cor. Causeway and Friend Sts., Boston, Mass. | 50 and 52 South Canal St., Chicago, Ill.

$10 to $500 INVESTED in Wall Street often leads to fortune. A 72 page book, explaining everything, and copy of the Wall Street Review, SENT FREE. JOHN HICKLING & Co., Bankers and Brokers, 72 Broadway, N.Y.

PARR'S Damascus Spring Steel Self-Adjusting *Bracket and Fret Saw.*



Sweep, 8 10 12 14 16 in.
Price, $1.25 1.50 1.75 2.00 2.25
With each frame is included 12 inimitable and original fret or scroll patterns, 8 bracket saw blades, 1 sheet impression paper, 1 brad awl, with full instructions. By mail, prepaid, on receipt of price named. 100 scrollwork designs free, on receipt of stamp. GEO. PARR, Buffalo, N. Y.

Profit & Pleasure! A WORKSHOP COMPLETE FOR - - $1,25

AN EXCELLENT OPPORTUNITY OFFERED to Enterprising Men: Private Sale of the Missouri Brass Foundry, Steam and Gas Pipe Works of the late John Kupferle, situated at the corner of Second St. and Washington Avenue, in the City of St. Louis, Mo. The above mentioned well known establishment, situated in the heart of the City, and in complete running order, and having a very extensive and valuable custom, is now, by leave of the Probate Court of St. Louis County, offered for sale upon reasonable terms. For particulars, apply to JOSEPH DEGENHART and CHARLES SCHITZ, Executors, No. 600 N. Second Street, St. Louis, Mo.

TO MANUFACTURERS OF AGRICULTURAL and Domestic Machinery—A House in Holland, doing a good business in above, will be glad to receive (post free) catalogues, terms, &c., of implements and household articles. References given and required. Address K. F., care of Nijgh and Van Ditmar, Rotterdam.

Shaping Machines



Have novel device for changing length of stroke while in motion, also, automatic down feed, and quick return. Four sizes.
Patented 1868, 1871, 1874.
Wood & Light Machine Co.
Worcester, Mass.
Manufacturers of all kinds of Iron Working Machinery Shafting, Pulleys, &c.

THE
Commercial Agency,

109 & 111 WORTH ST., NEW YORK.

MERCHANTS contemplating changes in their Partnerships, or the formation of NEW FIRMS, will oblige by communicating the same to us, that their names may appear correctly in the "COMMERCIAL AGENCY REGISTER."

Desiring to have our Records as accurate as possible, we will accept the Statements and References of any Merchant, and give the same the *most thorough scrutiny.*

BANKERS, MERCHANTS and MANUFACTURERS will oblige by informing us if in any case their knowledge and experience do not harmonize with our reports. We ask this that we may, by fresh and thorough investigation, correct errors, if any are found to exist.

The "COMMERCIAL AGENCY REGISTER" will be ready for delivery shortly after the first of January next.

MCKILLOP & SPRAGUE CO.

FOR RENT, WITH STEAM POWER—A brick two story building, 50x100 ft., with Steam Drying House, and a Complete System of Modern Machinery for the Manufacture of Flooring, Doors, Sash, Blinds, &c., at Columbus, Ga. For further particulars, apply to WM. H. HINDE, Cuyahoga Falls, Ohio.

THE
TRADE ENGINE.



Noiseless in operation—Perfect in workmanship—all light parts of Cast Steel.
Every Engine indicated, and valve corrected to give the highest attainable results.
Warranted superior to any semi-portable Engine in the market.
Send for Price List and Circular.
HERRMAN & HERCHELRODF M'F'G. CO.,
Dayton, Ohio.

The PORTER-ALLEN ENGINE.

POSITIVE-MOTION VARIABLE CUT-OFF.
RAPID PISTON SPEED.
Send for a circular to CHARLES T. PORTER, Harlem, N. Y. City.

THIS MOUSTACHE produced by the use of DYKES BEARD ELIXIR without injury, or will forfeit $100. Safe and sure. With full directions postpaid, 25c. A. L. SMITH & CO., Ag'ts, Palatine Ill. N B. For a HEAVY GROWTH use this preparation. Mention this paper.

STEEL NAME STAMPS—Post paid for 15c. per letter STEEL STAMP WORKS, 213 Chapel St., New Haven, Ct

INDIA RUBBER,

For Inventors and the Trade, made into any pattern at short notice, by F. H. HOLTON, 45 Gold St., New York. Established in 1860.

FOOT POWER TENONING MACHINES FOR SALE, By S. C. HILLS, 51 Cortlandt St., New York.

CELEBRATED FOOT LATHES.

Foot Power Back-geared Screw Lathes, Small Hand and Power Planers for Metal. Small Gear Cutters, Slide-rests, Ball Machines for Lathes, Foot Scroll Saws, light and heavy. Foot Circular Saws. **Just the thing for amateurs and artisans,** Selling everywhere. Send for Illustrated Catalogues
N. H. BALDWIN, Laconia, N. H.

PATENT SCROLL SAWS.

Our specialty is Scroll and Band Saws. Over 300 Machines in use. SUPERIOR TO ALL AND LESS PRICE.
CORDESMAN, EGAN & CO.,
Cor. 2nd & Central Ave., Cincinnati, O.

DISTINS BAND INSTRUMENTS—BOOSEY & CO., Sole Agents, 32 East 14th Street, New York.

Boult's Patent



Reverse Motion Paneling, Variety Moulding and Dovetailing Machine, cuts Panels of any design or style of mould in the solid wood with neatness and dispatch. Is a first class Shaper, Edge and Scroll Moulder. Does general Dovetailing with thick or thin stuffs. *Simple Durable, and Efficient.*

☞ Send for Pamphlet and Sample of work.
Improved Solid Steel Cutters for all kinds of Variety Moulders made to order, and warranted by the
B. C. MACHINERY CO., Battle Creek, Mich

IMPROVED MACHINERY for STAVE Heading, Shingle and Handles, Cabinet Maker's Machinery, Bailey Gauge Lathe, Durkee's Automatic Saw Mill (Improved), Key Seat Cutting, Pulley Boring, and Milling Machines Radial Drills, Steam Engines, and Bailey's Veneering Machines, Cable and Sheaves for transmitting Power etc tc. T. R. BAILEY & VAIL, Lockport, N.Y.

VINEGAR HOW MADE IN 10 HOURS from Cider, Wine or Molasses, **without using drugs.**
Address F. I. SAGE, Vinegar Maker Springfield, Mass.

EXCELSIOR

"Lowest Priced and BEST."
Do Your Own Printing!
$3 Press for cards, labels, envelopes, etc. Larger sizes for larger work.
Business Men do their printing and advertising, save money and increase trade. Pleasure and profit in **Amateur Printing.** The Girls or Boys have great fun and make money fast at printing. Send two stamps for full catalogue of presses, type, etc., to the Manufacturers,
Printing Presses.
KELSEY & CO., Meriden, Conn.

WILLIAM HENRY KING—ALBUMEN MANUFACTURER, 78 & 80 St. Andrew Street, Liverpool, Eng.

MACHINERY

IRON & WOOD WORKING MACHINERY OF EVERY DESCRIPTION.

Cold Rolled Shafting.

HANGERS, PULLEYS, COUPLINGS, BELTING, & &c. Send for Illustrated Catalogue and Price List.
GEORGE PLACE,
121 Chambers & 103 Reade Sts. N. Y. City.

BLAKE'S PATENT
Stone and Ore Breaker
Crushes all hard and brittle substances to **any required size.** Also, any kind of STONE for ROADS and for CONCRETE, &c.
Address BLAKE CRUSHER CO., New Haven, Conn.

Our Boiler and Pipe Covering
Save 25 PER CENT. in FUEL.
ASBESTOS FELTING COMPANY,
313—322 FRONT ST., New York.

PLANING AND MATCHING MACHINES
UNIVERSAL WOOD WORKERS
TRADE MARK
WOOD WORKING MACHINERY.
BENTEL, MARGEDANT & CO.
HAMILTON, OHIO.
Send for Catalogue and Price List.

© 1875 SCIENTIFIC AMERICAN, INC.

Advertisements,

Back Page - - - - - $1.00 a line.
Inside Page - - - - - 75 cents a line.

Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Friday morning to appear in next issue.

Engine, Spindle, & Cylinder Oil. E. H. KELLOGG, 17 Cedar St..N.Y..manufactures the best. Established '58.

C. G. Gunther's Sons

INVITE ATTENTION TO THEIR FINE STOCK OF

FUR-LINED

SILK CIRCULARS,

OF DIFFERENT STYLES, PLAIN AND TRIMMED, AND MADE UP WITH SPECIAL CARE.

AN ADDITIONAL ASSORTMENT OF CHOICE

Seal-Skin Sacques

OFFERED FOR THE

Holidays.

502 & 504 Broadway.

THE
Manufacturer and Builder.

The best and cheapest mechanical and scientific journal in the world. Edited by Prof. P. H. Vander Weyde. Each number contains treasures of information on all practical and scientific subjects. Subscription price $2.00 per year. Postage one cent a month extra. Ten thousand (10,000) applications wanted for specimen copies, which will be furnished **Free. Liberal commissions to agents.** Address **AUSTIN BLACK, Pub'r,** P. O. Box 4379. 37 Park Row, New York.

A $10 BOOK IN SIZE & STYLE FOR $9.—Vol. 1 of our new book, "Wooden and Brick Buildings," contains 80 9x12 plates of modern Designs for Cottages, Suburban & Farm Houses, costing $1,000 and upwards. Also specifications and details. Sent to any address free by mail or express, on receipt of price, $9.00.

☞ Illustrated catalogue free.
A. J. BICKNELL & CO., 27 Warren St., N. Y.

EAGLE FOOT LATHES,

With Scroll and Circular Saw Attachments, Slide Rest, Tools, &c.; also Small Engine Lathes, Metal Hand Planers, &c. Neatest designs, superior finish. **Low Prices.** Our new Catalogue describes these and every tool necessary for the Amateur or Artizan. Send for it.

WM. L. CHASE & CO.,
95 & 97 Liberty St., New York.

Planing & Matching,

Moulding, Re-sawing and Tenoning Machines. Scrol Saws and General Wood-Working Machinery.
JOHN B. SCHENCK'S SONS { Matteawan, N. Y.
Send for Catalogue. { 118 Liberty St., N.Y. city.

RR The RAILROAD GAZETTE, weekly, has illustrations and descriptions of everything of novelty and merit in railroad construction and operation. Contains all the railroad news. Read and highly commended by eminent railroad men, many of whom write for it. Specimens free. $4.20 a year. Subscribers for 1876 will receive numbers in 1875 from the time they subscribe. Address 73 Broadway, New York.

ELGIN WATCHES.

DECLARED by Railroad Officers, Engineers, Astronomers, Explorers, Navigators, Travelers and others, to be the **Most Accurate, Durable** timekeepers in the world.

26 GRADES now in the market, including **Ladies and Gentlemen's** sizes, **Key** Winders, **Stem** Winders, **Stem** Setters, Full Plate, Three-Quarter Plate, Plain, Full Jeweled, Etc.

PRICES ranging from a few dollars for **plain** but **neat, Durable** and **Reliable** timekeepers in Silver cases, to two hundred or more dollars for a highly finished and remarkably accurate one in fine Gold cases.

AVOID all C.O.D. advertisers and apply to dealers of known respectability, as Elgin Watches are not furnished to **any** party **whatever** to be sold on the disreputable C. O. D. plan, which is used to palm off imitation and pinchbeck goods.

DEMAND and receive with your watch the regular warranty medal of the Company, as noted below, and see that the name and number correspond.

THE WATCH named T. M. Avery is offered at such prices as to come within the reach of all, and is unequaled in the world for the money.

GUARANTEE The Company makes no watches at *any price*, low or high, which it is not willing to FULLY WARRANT. Each watch movement of *any and every grade*, made by the Elgin National Watch Company, and bearing its trade-mark "*Elgin, Ills.*," is accompanied by the *official* WARRANTY MEDAL of the Company, with number and name corresponding to the watch.

FOR SALE by respectable jewelers in nearly every town in the United States and Canadas, and also in the principal cities throughout the world. *Call on your jeweler and ask to see them.*



The Eagle Anvil,

WARRANTED and Price Reduced to 10 Cts. per Pound.

JESSOP'S BEST TOOL CAST STEEL FACE AND HORN ON BEST AMERICAN IRON.

They have proved better than the Best English Anvils.

ESTABLISHED 1843.

GENERAL AGENTS.—NEW YORK: J. Clark Wilson & Co.; Russell & Erwin M'f'g Co.; H. Durrie & Co. PHILADELPHIA: James C. Hand & Co. BOSTON: George H. Gray & Danforth. BALTIMORE: W. H. Cole. CINCINNATI: Post & Co. CHICAGO: S. Kimbark. LOUISVILLE; W. B. Belknap & Co.

Pyrometers, For showing Heat of Ovens, Hot Blast Pipes Boiler flues, Super-Heated Steam, Oil Stills, &c.
HENRY W. BULKLEY, Sole Manufacturer,
98 Liberty St., New York.

ROGERS' TANNATE OF SODA BOILER SCALE PREVENTIVE. JOS. G. ROGERS & CO., Madison, Ind.
☞ Send for book on Boiler Incrustation.

DAMPER REGULATORS **BEST** AND LEVER GAGE COCKS.
MURRILL & KEIZER, 44 Holliday St., Balt.

THE NATIONAL
Steel Tube Cleaner.

For Cleaning Boiler Tubes.



PATENTED JULY 28 1874.

Adopted and in use by U. S. Navy. For sale by dealers. Send for Circular. THE CHALMERS SPENCE CO. foot E. 9th Street. N. Y., Agents for the U. S.

NON-COMBUSTIBLE STEAM BOILER & PIPE
COVERING

WITH "AIR SPACE" IMPROVEMENT.
Saves 10 to 20 per cent. CHALMERS SPENCE CO., foot E. 9th St., N.Y.; 1202 N. 2nd St., St. Louis, Mo.

PORTLAND CEMENT

For Walks, Cisterns, Foundations, Stables, Cellars, Bridges, Reservoirs, Breweries, etc.
Remit 6 cents postage for Practical Treatise on Cements.
S. L. MERCHANT & Co., 76 South St., New York.

IRON PLANERS.

ENGINE LATHES, DRILLS, &c. Send for Price List.
NEW HAVEN MANUFACTURING CO.,
New Haven, Conn

THE SOUTHERN STATES
AGRICULTURAL AND INDUSTRIAL
EXPOSITION

Will be Held on the Fair Grounds, at New Orleans, Commencing February 26, 1876, and Continuing Ten Days.

L. N. MARKS, PRESIDENT.
SAMUEL MULLEN, GENERAL SUPERINTENDENT.

Executive Committee.

A. BALDWIN, Chairman;
JAMES I. DAY, W. B. SCHMIDT,
COLONEL J. D. HILL, JOHN G. FLEMING.

It is the aim of the Board of Commissioners to make it a thorough Exposition of the Agricultural and Mechanical Products of the Southern States, Mexico, and Central America; but it will be open to competitors throughout the country, and the general premium list will embrace all articles comprehended in the general design of an Agricultural and Industrial Exposition, including special premiums for strictly Southern products.

The Mechanical Department has been devised with great care and on the most extensive scale. The Premium List will be ready for distribution November 20th.

Ample arrangements have been perfected for the transportation of goods and visitors from every section at reduced rates. For detailed information, address
SAMUEL MULLEN, GEN'L SUP'T,
No. 80 Camp St., New Orleans.

THE TANITE COMPANY
Emery Wheels — TANITE — Emery Grinders
STROUDSBURG, MONROE Co. Pa.

PURE EMERY,
guaranteed equal to any in the market at prices lower than any other first class emery.

W. C. DUYCKINCK,

IMPORTER, MANUFACTURER, AND DEALER IN
Railway, Machinists' and Engineers' Supplies,

50 AND 52 JOHN STREET,
P. O. Box 4101. NEW YORK.

TRADE MARK. CONCORD (USE) N.H. **GENUINE CONCORD AXLES**

The Standard—Best Stock—Finest Finish.

MANUFACTURED ONLY BY
D. ARTHUR BROWN & CO., Fisherville, N.H.

and Shaped Diamond Carbon Points, indispensable for Turning Emery Wheels, Grindstones, also Truing up Hardened Steel and Paper Calender Rollers, etc. Address J. DICKINSON, Patentee, 64 Nassau St., N.Y.

NO FILES ARE USED ON HOE'S CHISEL TOOTH SAWS. No swaging, no gumming, no rounding, nor side set to perplex the sawyer. They run straight, and are fifty per cent cheaper to use than the old saw.

REYNOLDS & CO.,

145 EAST ST., NEW HAVEN, CT.,
MANUFACTURE
Iron and Steel Set Screws, Round, Square, and Hexagon Head; Machine and Cap Screws; Piano, Knob, and Lock Screws; Machine, Bridge, and Roof Bolts, Bolt Ends, Blanks, Nuts, Washers, etc., of every description.
Send for Price List.

RICHARDSON, MERIAM & CO., Manufacturers of the latest improved Patent Daniels' and Woodworth Planing Machines, Matching, Sash and Molding, Tenoning, Morcising, Boring, Shaping, Vertical and Circular Re-sawing Machines, Saw Mills, Saw Arbors, Scroll Saws, Railway, Cut-Off, and Rip-Saw Machines, Spoke and Wood Turning Lathes, and various other kinds of Wood-working Machinery. Catalogues and price lists sent on application. Manufactory, Worcester, Mass. Warehouse, 107 Liberty Street New York.

Schlenker's Stationary AND Revolving - Die Bolt Cutters,

MANUFACTURED BY THE
HOWARD IRON WORKS,

BUFFALO, N. Y.
☞ Send for Circular.

HARTFORD STEAM BOILER Inspection & Insurance COMPANY.

W. B. FRANKLIN, V. Pres't. J. M. ALLEN, Pres't.
J. B. PIERCE, Sec'y.
HARTFORD, CONN.

TO ENGINEERS, MACHINERY MANUFACTURERS, AND TOOL MAKERS. The undersigned DUTCH Firm is willing to undertake the sole Agency in Holland of SUPERIOR CLASS of ENGINES, AGRICULTURAL MACHINERY, AND ENGINEERING TOOLS. None but FIRST CLASS MANUFACTURERS need apply. LEONARD SLIGCHER,
Monnickendam, Holland.

FOR THE HOLIDAYS—Gas Fitter's & Plumber's Guide, a book of instruction. A Valuable Present for man or boy. Illustrated. Paper cover, 75c.; nicely bound, $1, by mail free. J. D. GALLOWAY, 345 N. 10th, Phila.

TO DYERS AND MANUFACTURERS. Thomas's Fluid Tannic Acid, or Black Color Base, for Coloring Hats, Carpets, and all Felt Goods, and Textile Fabrics, and for making Ink. Price 6c. per lb. Address N. SPENCER THOMAS, Elmira, N. Y.

NOYE'S
Mill Furnishing Works

are the largest in the United States. They make Burr Millstones, Portable Mills, Smut Machines, Packers, Mill Picks, Water Wheels, Pulleys and Gearing, specially adapted to flour mills. Send for catalogue.
J. T. NOYE & SON Buffalo, N. Y.

MICROSCOPES.

First class Microscopes, magnifying 100 diameters. Price $2 00. Smaller size, with same focal adjustment, $1.50. Address F. BLOCKLEY, 253 Van Buren Street, Brooklyn, New York. Illustrated Circulars sent free.

LIFE-LIKE PICTURES, accurate as photographs, can be drawn on paper by means of Parlor Camera. Price $1.25, prepaid. Send for Circular to F. BLOCKLEY, 253 Van Buren Street, Brooklyn, N. Y.

WIRE ROPE

Address JOHN A. ROEBLING'S SONS, Manufacturers, Trenton, N. J., or 117 Liberty St., New York. Wheels and Rope for conveying power long distances. Send for Circular.

PATENT RIGHT FOR SALE.—The one-half interest of the Riley estate in the Universal Wood Worker, to the highest bidder. Send offer to J. B. MANNIX, Admr., 148 Walnut St., Cincinnati, O.

ENGINES & BOILERS, new & 2d h'd, perfect condition. Very cheap. Address BINGHAM & RICH, Oil City, Pa.

Portland Cement,

From the best London Manufacturers. For sale by JAMES BRAND, 55 Cliff St., N. Y.
A Practical Treatise on Cement furnished for 25 cents.

THE BEST INJECTOR

For Locomotive and Stationary Boilers.
FRIEDMANN'S PATENT.
Over 15,000 Now in Use Here and in Europe.

Throws more and hotter water, with less steam, than any others. It has two Waterways, fixed Nozzles, and no movable parts to get out of order

NATHAN & DREYFUS, Sole Manufacturers,
108 Liberty St., New York.
☞ Send for Catalogue.

Non-Freezing, Filtering, Automatic



STEAM TRAP.

Sent C. O. D. to any part of the country, and Warranted to work perfect, or the money refunded. No. 0 drains 2,000 ft., 1 in. pipe, $30 No. 1, 4,000, $40. No. 2, 20,000, $50, largest Size, 9x14x18 in. Send for Circular.

WM. H. JENKINS & CO.,
228 Church Street, Philadelphia, Pa.

CANCER Successfully Treated,

without use of Knife or Caustics. DR. A. H. BROWN, New Haven, Conn. Send two postage stamps.
Correspondence from Physicians solicited.

$12 a day at home. Agents wanted. Outfit and terms free. TRUE & CO., Augusta, Maine.

$77 A WEEK to Agents, Old & Young, Male & Female, in their locality. Terms & OUTFIT FREE. Address P. O. VICKERY & CO., Augusta, Me.

THOMAS'S FLUID TANNATE OF SODA—Never fails to remove Scale from any Steam Boiler, using any kind of water. It is in Barrels 500 lb., ½ Bbls. 250 lb., ¼ Bbls. 125 lb. Price only 10c. per lb. Address N. SPENCER THOMAS, Elmira, N. Y.

MAGNETS—Permanent Steel Magnets of any form or size, made to order by F. C. BEACH & CO., 246 Canal St., New York. Makers of the celebrated Tom Thumb and Miniature Telegraph Instruments.



We will send this set of CARVING TOOLS in a box by mail, prepaid, on receipt of one dollar. The tools are of the very best quality, with Apple Wood handles, and nicely sharpened for use. MILLERS FALLS CO.,
78 Beekman St., New York.

☞ T. V. Carpenter, Advertising Agent. Address Box 773, New York city.



WESTON'S Differential Pulley BLOCKS,

ALSO KNOWN AS
Doyle's, Hall's & Bird's,

Are now all merged and are controlled exclusively by the
YALE LOCK M'F'G CO.,
HENRY R. TOWNE, Prest.
STAMFORD, CONN.

VAN WART & MCCOY,
New York Agents,
134 & 136 Duane Street.

☞ T. A. WESTON, Mechanical Engineer, with the Company.

BOGARDUS' PATENT UNIVERSAL ECCENTRIC MILLS—For grinding Bones, Ores, Sand, Old Crucibles, Fire Clay, Guanos, Oil Cake, Feed, Corn, Corn and Cob, Tobacco, Snuff, Sugar, Salts, Roots, Spices, Coffee, Cocoanut, Flaxseed, Asbestos, Mica, etc., and whatever cannot be ground by other mills. Also for Paints, Printers' Inks, Paste Blacking, etc. JOHN W. THOMSON, successor to JAMES BOGARDUS, corner of White and Elm Sts., New York.

Todd & Rafferty Machine Co.

MANUFACTURERS OF
The celebrated Greene Variable Cut-Off Engine; Lowe's Patent Tubular and Flue Boilers; Plain Slide Valve Stationary, Hoisting, and Portable Engines. Boilers of all kinds. Steam Pumps, Mill Gearing, Shafting, &c., Silk Tow Oakum, Bagging, Rope, Flax, and Hemp Machinery. Agents for the New Haven Manufacturing Co.'s Machinist's Tools; for Judson's Governors and Stop-Valves; Sturtevant Blowers; and Differential Pulley-Blocks. WAREROOMS, 10 BARCLAY STREET, NEW YORK. WORKS PATERSON, NEW JERSEY.



Water Wheels.

More than four times as many of Jas. Leffel's Improved Double Turbine Water Wheels in operation than any other kind. 24 sizes made, ranging from 5¾ to 96 in. diam., under heads from 1 to 240 ft. Successful for every purpose. Large new pamphlet, the finest ever published, containing over 80 fine illustrations, sent free to parties interested in water power
JAS. LEFFEL & CO.,
Springfield, O., & 109 Liberty St., New York City

WHIPPLE'S Patent Door Knob.

Awarded a Bronze Medal at the American Institute Fair for 1874. The Judges say: "We consider this method of fastening DOOR KNOBS a great improvement over anything yet invented for the purpose, as it obviates the use of side screws and washers, and can be regulated to suit any thickness of Doors." Send for Circular.
THE PARKER & WHIPPLE COMPANY,
West Meriden, Conn., or 97 Chambers St., N. Y.

H. W. JOHNS' PATENT.
ASBESTOS MATERIALS.

Roofing, Roof Coating, and **Cement,** for repairing Roofs. **Paints**—all colors, ready mixed, **Roof Paint, Fire Proof Coating, Boiler** and **Steam Pipe Coverings, Steam Packing, Roofing, Sheathing and Lining Felts,** &c.
All ready for use, and easily applied. Send for Pamphlets, Price Lists, &c.

H. W. JOHNS, 87 Maiden Lane, N.Y
Patentee and Manufacturer. Established 1858.

THE IMPROVED
NIAGARA STEAM PUMP,

93 to 97 Pearl St., Brooklyn, N. Y.
Agency at 40 John St., New York.



Hubbard & Aller,
SOLE MANUFACTURERS,
ENGINES AND BOILERS,
Pulleys, Shafting and Hangers a Specialty.

SECRETS WONDERS

And Mysteries. A 64 page Book, full of peculiar **Disclosures Illustrated.** Sent free to all for 2 postage stamps.
Address J. FLETCHER & CO., Williamsburgh, New York

TO ELECTRO-PLATERS, JEWELERS, AND WATCHMAKERS.

BATTERIES, CHEMICALS, AND MATERIALS, in sets or single, with Books of Instruction for Nickel, Gold, and Silver Plating. THOMAS HALL, Manufacturing Electrician, 16 Bromfield Street, Boston, Mass. Illustrated Catalogue sent free

GARDINER'S PATENT Centring AND Squaring Attachment, FOR LATHES.

Address,
R. E. STATE,
SPRINGFIELD, O.
SEND FOR CIRCULAR AND PRICE-LIST.

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard Sts. Philadelphia and 59 Gold St., New York

© 1875 SCIENTIFIC AMERICAN, INC.